



# SWAT

---

Danville • Lafayette • Moraga • Orinda • San Ramon & the County of Contra Costa

## SOUTHWEST AREA TRANSPORTATION COMMITTEE

### MEETING AGENDA

**Monday, May 3, 2021**

**3:00 p.m.**

Join Zoom Meeting

<https://cityofsanramon.zoom.us/j/99044136195>

Meeting ID: 990 4413 6195

One tap mobile

+1-669-900-6833 - 99044136195# US (San Jose)

### CORONAVIRUS DISEASE (COVID-19) ADVISORY AND MEETING PROCEDURE

On March 16, 2020, the Health Officer of Contra Costa County issued an Order through April 7, 2020 that directed that all individuals living in the county to shelter at their place of residence except that they may leave to provide or receive certain essential services or engage in certain essential activities and work for essential businesses and governmental services.

The seven Bay Area Public Health Officers who ordered a shelter in place in mid-March will extend the orders through May 31. This new Order replaces the shelter order issued on March 31, 2020. The March 31 order is the "Prior Order" and the April 29 Order as the "new Order" or "Order." This new Order will go into effect on 11:59 pm on Sunday May 3, 2020, and will remain in effect until 11:59 pm on Sunday May 31, 2020, unless the Health Officer amends or extends it.

Under the Governor's Executive Order N-29-20, this meeting may utilize teleconferencing, as a precaution to protect the health and safety of staff, officials, and the general public. SWAT members will not be physically in attendance, but will be available via video conference.

There will be no physical location for members of the public to participate in the meeting. We encourage members of the public to shelter in place and access the meeting online using the web-video communication application, Zoom. Zoom participants will have the opportunity to speak during the Public Comment period (for topics not on the agenda), in addition to each of the agenda items.

If you are submitting a public comment via email, please do so by **12:00 p.m. on Monday, May 3, 2021** to [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov). Please include "Public Comment 05/03/2021" in the subject line. In the body of the email, please include your name and the item you wish to speak on. Public comments submitted will be read during Public Comment and will be subject to the regular three-minute time restriction.

### 1. CONVENE MEETING/SELF INTRODUCTION

## 2. PUBLIC COMMENT

Members of the public are invited to address the Committee regarding any item that is not listed on the agenda. *(Please complete a speaker card in advance of the meeting and hand it to a member of the staff)*

## 3. BOARD MEMBER COMMENT

## 4. ADMINISTRATIVE ITEMS

## 5. CONSENT CALENDAR

**5.A Approval of Minutes:** SWAT Meeting Minutes of April 5, 2021

**5.B Approval** of SWAT TAC recommendation to appoint staff to the Contra Costa Transportation Authority Technical Coordinating Committee (TCC) for a two-year term through March 1, 2023

End of Consent Calendar

## 6. REGULAR AGENDA ITEMS

**6.A CONSIDERATION** - Whether to Recommend to Contra Costa Transportation Authority (CCTA) Amending the Lamorinda Action Plan to Allow for the Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette Project – by: Lisa Bobadilla, SWAT Administrator and Presentation by: Mike Moran, City of Lafayette (*Attachments – Action Required*)

**Note:** As of 4/29/2021 the SWAT staff report has been updated.

## 7. WRITTEN COMMUNICATIONS (*Attachments – Action as determined necessary*)

- WCCTAC Meeting Summary – March 26, 2021
- SWAT Meeting Summary – April 5, 2021
- TRANSPAC Meeting Summary – April 8, 2021

## 8. DISCUSSION:

Next Agenda

## 9. ADJOURNMENT

Monday, June 7, 2021 - 3:00 p.m.- Zoom Teleconference

The SWAT Committee will provide reasonable accommodation for persons with disabilities planning to participate in SWAT monthly meetings. Please contact Lisa Bobadilla at least 48 hours before the meeting at (925) 973-2651 or [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov).

**Staff Contact:** Lisa Bobadilla, SWAT Administrative Staff

Phone: (925) 973-2651 / E-Mail: [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov).

Agendas, minutes and other information regarding this committee can be found at: [www.CCTA-SWAT.net](http://www.CCTA-SWAT.net)

**AGENDA ITEM 5.A**



# SWAT

Danville • Lafayette • Moraga • Orinda • San Ramon & the County of Contra Costa

## SUMMARY MINUTES April 5, 2021 – 3:00 p.m.

Join Zoom Meeting

<https://cityofsanramon.zoom.us/j/96991389585>

**Committee members present:** Teresa Gerringer, City of Lafayette (Chair); Karen Stepper, Town of Danville (Vice Chair); Candace Andersen, Contra Costa County; Renata Sos, Town of Moraga; Dave Hudson, City of San Ramon; Dennis Fay, City of Orinda

**Committee members absent:** Amy Worth, City of Orinda

**Staff members present:** Andy Dillard, Town of Danville; Jason Chen, City of Orinda; Robert Sarmiento, Contra Costa County; Bret Swain, Town of Moraga; Lisa Bobadilla, City of San Ramon;

**Others present:** Matt Kelly, Contra Costa Transportation Authority (CCTA); Ricki Wells, BART; Dave Fong, Town of Danville; Ruby Horta, County Connection; Stephanie Kellogg, Contra Costa County; Kristen Albaum, Lafayette Resident

1. **CONVENE MEETING/SELF INTRODUCTIONS:** Meeting called to order by Chair Gerringer at 3:00 p.m.

2. **PUBLIC COMMENT**

Kristen Albaum, Lafayette resident spoke about the proposed Lamorinda Gateway Constraint Policy Amendment.

3. **BOARD MEMBER COMMENT**

4. **ADMINISTRATIVE ITEMS**

5. **CONSENT CALENDAR:**

5.A **Approval of Minutes:** SWAT Minutes of March 1, 2021

**ACTION: APPROVED** – Stepper/Sos/unanimous

End of Consent Calendar

6. **REGULAR AGENDA ITEMS:**



## **6.A Review and Approve the Draft “Request for Proposal” for the SWAT Website**

Lisa Bobadilla, SWAT Administrator presented this item. Ms. Bobadilla stated that the final draft of the SWAT Website Request for Proposal (RFP) was reviewed and approved by SWAT TAC at the March 17, 2021 meeting. Once approved by SWAT, the RFP will be circulated to potential bidders and notification will be posted on the current SWAT website, in addition to all SWAT jurisdiction websites.

The RFP schedule is as follows:

<b>Milestone</b>	<b>Date</b>
Release RFP/RFQ	April 6, 2021
Proposals Due	May 6, 2021 at 5:00pm
Interview Firms (if necessary)	Week of May 17, 2021
Approval of Selected Firm	July 2021

The total costs of the SWAT website redesign and first year of hosting/maintenance is not to exceed \$12,000 (\$10,000 for website redesign and \$2,000 for annual maintenance/service contract). The total cost for website design, per SWAT jurisdiction is \$1,600 per agency for Fiscal Year 2021-2022. The \$2,000 annual maintenance/service contract is already included in the annual SWAT Administrative Service Memorandum of Understanding.

**ACTION: APPROVED** – Andersen/Stepper/unanimous

**7. WRITTEN COMMUNICATIONS:** The following written communication items were made available:

- Contra Costa Transportation Authority Meeting Summary – February 17, 2021
- Metropolitan Transportation Commission, Bay Area Express Lanes – March 2021
- SWAT Meeting Summary – March 1, 2021
- TRANSPAC Meeting Summary – March 11, 2021
- TRANSPLAN Meeting Summary – March 11, 2021
- Contra Costa Transportation Authority Meeting Summary – March 17, 2021
- Correspondence related to Lamorinda Program Management Committee, Lafayette City Council, Lafayette Planning Commission and Lafayette Circulation Commissions – Responses to the Gateway Constraint Policy Amendment

**ACTION:** Informational Items Only – No action required

**8. DISCUSSION:** Next Agenda

**9. ADJOURNMENT:** to Monday, May 3, 2021 at 3:00 p.m.– Zoom Teleconference

**ACTION:** Meeting adjourned by Chair Gerringer at 3:16 p.m.

**Staff Contact:**

Lisa Bobadilla  
City of San Ramon  
P (925) 973-2651  
F (925) 275-8178  
Email address: [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov)  
[www.CCTA-SWAT.net](http://www.CCTA-SWAT.net)

**Alternate Staff Contact:**

Darlene Amaral  
City of San Ramon  
P (925) 973-2655  
F (925) 275-8178  
Email address: [damaral@sanramon.ca.gov](mailto:damaral@sanramon.ca.gov)

**AGENDA ITEM 5.B**



# SWAT

---

Danville • Lafayette • Moraga • Orinda • San Ramon & the County of Contra Costa

**DATE:** May 3, 2021

**TO:** Southwest Area Transportation Committee (SWAT)

**FROM:** SWAT Technical Advisory Committee (TAC)

**SUBJECT:** Recommendation of Primary Representatives and Alternate Representatives to the Contra Costa Transportation Authority Technical Coordinating Committee effective March 1, 2021 to March 1, 2023.

---

## BACKGROUND

The terms for the Technical Coordinating Committee (TCC) members have expired. Therefore, at the request of the Contra Costa Transportation Authority the SWAT TAC recommends the appointments of the following staff members, from the SWAT sub-region, to the Authority's TCC for a two-year term, effective March 1, 2021 to March 1, 2023.

	<b>Primary Representative</b>	<b>Alternate Representative</b>
Planning:	Lisa Bobadilla, San Ramon	Steve Kowalski, Moraga
Engineering:	Jason Chen, Orinda	Siavash Shojoat, Lafayette
Transportation:	Andy Dillard, Danville	Majid Hafezieh, Danville

## RECOMMENDATION

The SWAT TAC recommends SWAT approve the Primary Representatives and Alternate Representatives to the CCTA TCC effective March 1, 2021 to March 1, 2023.

## Staff Contact:

Lisa Bobadilla, SWAT Administrator  
Phone: (925) 973-2651  
Email: [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov)

**AGENDA ITEM 6.A**



# SWAT

---

Danville • Lafayette • Moraga • Orinda • San Ramon & the County of Contra Costa

**DATE:** May 3, 2021

**TO:** Southwest Area Transportation (SWAT) Committee

**FROM:** SWAT TAC  
By: Lisa Bobadilla, SWAT Administrative Staff  
Presentation by: Mike Moran, City of Lafayette

**SUBJECT:** **SWAT Consideration whether to Recommend to Contra Costa Transportation Authority (CCTA) Amending the Lamorinda Action Plan to Allow for the Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette**

---

## BACKGROUND

On April 23, 2021, SWAT received a letter (attached) from the Lamorinda Program Management Committee (LPMC) requesting SWAT consider supporting amending the Lamorinda Action Plan to Allow for the Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette Project.

During the January 11, 2021 LPMC meeting, the committee considered and discussed a request by the City of Lafayette to amend one of the gateway constraints in the Lamorinda Action Plan (LAP) that pertains to Pleasant Hill Road, a Route of Regional Significance. Currently, the LAP states: ***"The Gateway Constraint Policy would prohibit the addition of any through lanes, including short-link segments, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limits line north of the intersection with Taylor Boulevard."***

The proposed amendment would remove the prohibition against short-link segments, and would allow for the construction of a southbound short-link travel lane on Pleasant Hill Road starting just north of Deer Hill Road and terminating at the State Route 24 westbound on-ramp (trap lane).

The request stems from the City of Lafayette recent approval of the Terraces of Lafayette project, which is a 315-unit multi-family housing project to be built at

the southwest corner of Pleasant Hill Road and Deer Hill Road. The trap lane on Pleasant Hill Road was submitted as part of a developer application to mitigate a.m. peak traffic generated from the Terraces of Lafayette project.

The LPMC considered the proposed amendment and noted the following:

1. The LPMC is an advisory committee to SWAT, which is an advisory committee to the CCTA.
2. The decision whether to amend the LAP to allow for the construction of the proposed trap lane rests exclusively and solely with CCTA. Neither LPMC nor SWAT has any decision-making authority.
3. The Terraces of Lafayette development will proceed regardless of whether an amendment to the LAP that allows for the trap lane is, or is not, approved.

Upon receiving public comment during the LPMC meeting, asking questions of staff, and deliberating, the LPMC Board unanimously approved the following:

1. Request that the proposed language for amending the Lamorinda Action Plan be distributed without LPMC comment to the RTPCs for their review and comment; and
2. Forward to SWAT and the other Regional Transportation Planning Committees (RTPC's) the proposed amendment to the Lamorinda Action Plan for their review, and include in that transmittal the following:
  - i. The pros & cons of the trap lane as presented in slide 6 of the staff report; and
  - ii. The policy question of whether an amendment should be taken in the context of a response to a particular development or whether it should be taken up as part of an overall revision to the Lamorinda Action Plan and the plans of the other RTPCs in 2021.

### **Regional Transportation Planning Committees**

Per the request of the LPMC, the RTPC's considered the request to review the proposed language for amending the Lamorinda Action Plan on the following:

- TRANSPAC – March 11, 2021
- TRANSPLAN – March 11, 2021
- WCCTAC – March 26, 2021

The RTPC's support the request to amend the Lamorinda Action Plan.

## **RECOMMENDATION**

SWAT TAC recommends that SWAT consider forwarding the Lamorinda Action Plan Amendment request to the Contra Costa Transportation Authority for consideration.

## **NEXT STEPS**

1. Forward comments from SWAT to the CCTA.
2. CCTA to consider Lamorinda Action Plan Amendment.

## **ATTACHMENTS**

- A. Letter from Lamorinda Planning Management Committee
- B. Letter from City of Lafayette
- C. Terraces of Lafayette Site Plan – Annotated
- D. RTPC Letters (TRANSPAC, TRANSPLAN, WCCTAC)
- E. Lafayette Staff Report for LPMC with Attachments and Hyperlinks – January 11, 2021
- F. Correspondence from Lafayette resident Kristen Altbaum

## **Staff Contact:**

Lisa Bobadilla, SWAT Administrator  
Phone: (925) 973-2651  
Email: [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov)  
Web: [www.CCTA-SWAT.net](http://www.CCTA-SWAT.net)



April 21, 2021

Southwest Area Transportation Committee (SWAT)  
Attn: Chair Teresa Gerringer  
c/o City of San Ramon  
7000 Bollinger Canyon Road  
San Ramon, CA 94583

Subject: Consideration of Amending the Lamorinda Action Plan to Allow for the  
Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane)  
as Part of the Proposed Terraces of Lafayette Project

Dear SWAT Board Members,

At its January 11, 2021 meeting, the Lamorinda Program Management Committee (LPMC), considered and discussed a proposed amendment to one of the gateway constraints in the Lamorinda Action Plan (LAP) that pertains to Pleasant Hill Road, a Route of Regional Significance. Currently, the LAP states: “The Gateway Constraint Policy would prohibit the addition of any through lanes, including short-link segments, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limits line north of the intersection with Taylor Boulevard.”. The proposed amendment would remove the prohibition against short-link segments and would allow for the construction of a southbound short-link travel lane on Pleasant Hill Road starting just north of Deer Hill Road and terminating at the State Route 24 westbound on-ramp (trap lane). The request for this amendment arises from the City of Lafayette’s recent approval of the Terraces of Lafayette project -- a 315-unit multi-family housing project to be built at the southwest corner of Pleasant Hill Road and Deer Hill Road. The trap lane on Pleasant Hill Road was submitted as part of a developer application to mitigate a.m. peak traffic generated from the Terraces of Lafayette project.

During its consideration of the proposed amendment, the LPMC noted the following:

- The LPMC is an advisory committee to SWAT, which is in turn an advisory committee to CCTA. The decision whether to amend the LAP to allow for the construction of the proposed trap lane rests exclusively and solely with CCTA. Neither LPMC nor SWAT has any decision-making authority.
- The Terraces of Lafayette development will proceed regardless of whether an amendment to the LAP that allows for the trap lane is or is not approved.
- There are pros and cons to the construction of the trap lane. Specifically, the LPMC reviewed a slide in the staff presentation that listed the following pros and cons:

Reasons against the trap lane:

- Added capacity will attract more traffic

- Roadway will be even larger
- Pedestrian crossing times will increase across a longer distance

Reasons for the trap lane:

- Delay for local traffic can be reduced while still metering regional traffic with signal coordination
  - Evacuation times will be decreased during an emergency
  - Provides an extra lane width under the City's control to utilize for future use
- The proposed amendment to the LAP raises an important policy question – namely, whether it is appropriate to amend an action plan such as the LAP specifically in response to a particular development project or whether any amendment should be done as part of a larger amendment or update to the action plan.

Upon receiving public comment, asking questions of staff, and deliberating, the LPMC Board unanimously approved the following:

1. *Request that the proposed language for amending the Lamorinda Action Plan be distributed without LPMC comment to the RTPCs for their review & comment;*
2. *Forward to SWAT and the other RTPCs the proposed amendment to the Lamorinda Action Plan for their review, and include in that transmittal the following:*
  - i. *The pros & cons of the trap lane as presented in slide 6 of the staff report;*
  - ii. *The policy question of whether an amendment should be taken in the context of a response to a particular development or whether it should be taken up as part of an overall revision to the Lamorinda Action Plan and the plans of the other RTPCs in 2021.*

If you have any questions or comments, please feel free to contact Bret Swain, Senior Engineer of the Town of Moraga, at [BSwain@moraga.ca.us](mailto:BSwain@moraga.ca.us). Thank you.

Sincerely,



Bret Swain, LPMC Administrator

- Attachments:
1. Summary Minutes from Jan 11, 2021 LPMC Meeting (Adopted 4-5-21)
  2. Jan. 11, 2021 LPMC Agenda Item 6a. Report Package
  3. LPMC Cover Letter to RTPCs
  4. RTPC Response Letters

cc: Jason Chen, Orinda  
Shawn Knapp, Moraga  
Mike Moran, Lafayette  
Lisa Bobadilla, SWAT  
John Hoang, CCTA  
Matt Kelly, CCTA

# Lamorinda Program Management Committee

---

February 1, 2021

John Nemeth  
WCCTAC  
6333 Potrero Avenue, Suite 100  
El Cerritos, CA 94530  
Via email: [jnemeth@wcctac.org](mailto:jnemeth@wcctac.org)

Mathew Todd, P.E.  
TRANSPAC  
1211 Newell Avenue, Suite 200  
Walnut Creek, CA 94596  
Via email: [Matt@GrwayBowenScott.com](mailto:Matt@GrwayBowenScott.com)

John Cunningham  
TRANSPLAN  
30 Muir Road  
Martinez, CA 94553  
Via email: [john.cunningham@dcd.cccounty.us](mailto:john.cunningham@dcd.cccounty.us)

Subject: Consideration of Amending the Lamorinda Action Plan to Allow for the Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette Project

Dear RTPC Administrators,

At its January 11, 2021 meeting, the Lamorinda Program Management Committee (LPMC), considered and discussed a proposed amendment to one of the gateway constraints in the Lamorinda Action Plan (LAP) that pertains to Pleasant Hill Road, a Route of Regional Significance. Currently, the LAP states: "The Gateway Constraint Policy would prohibit the addition of any through lanes, including short-link segments, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limits line north of the intersection with Taylor Boulevard." The proposed amendment would remove the prohibition against short-link segments and would allow for the construction of a southbound short-link travel lane on Pleasant Hill Road starting just north of Deer Hill Road and terminating at the State Route 24 westbound on-ramp (trap lane). The request for this amendment arises from the City of Lafayette's recent approval of the Terraces project -- a 315-unit multi-family housing project to be built at the southwest corner of Pleasant Hill Road and Deer Hill Road. The trap lane on Pleasant Hill Road

# Lamorinda Program Management Committee

was submitted as part of a developer application to mitigate a.m. peak traffic generated from the Terraces project.

During its consideration of the proposed amendment, the LPMC noted the following:

- The LPMC is an advisory committee to SWAT, which is in turn an advisory committee to CCTA. The decision whether to amend the LAP to allow for the construction of the proposed trap lane rests exclusively and solely with CCTA. Neither LPMC nor SWAT has any decision-making authority.
- The Terraces development will proceed regardless of whether an amendment to the LAP that allows for the trap lane is or is not approved.
- There are pros and cons to the construction of the trap lane. Specifically, the LPMC reviewed a slide in the staff presentation that listed the following pros and cons:

Reasons against the trap lane:

- Added capacity will attract more traffic
- Roadway will be even larger
- Pedestrian crossing times will increase across a longer distance

Reasons for the trap lane:

- Delay for local traffic can be reduced while still metering regional traffic with signal coordination
- Evacuation times will be decreased during an emergency
- Provides an extra lane width under the City's control to utilize for future use
- The proposed amendment to the LAP raises an important policy question – namely, whether it is appropriate to amend an action plan such as the LAP specifically in response to a particular development project or whether any amendment should be done as part of a larger amendment or update to the action plan.

After receiving public comment, asking questions of staff, and deliberating, the LPMC instructed staff as follows:

- That the LPMC takes no position and expresses no view on whether or not the amendment to the LAP should or should not be made.
- That proposed amendment to the LAP be shared with SWAT and the other regional transportation planning committees (RTPC) that serve as advisory bodies to CCTA for their review and comment, if any.
- That the pros and cons of the proposed trap lane that were presented to LPMC also be shared with SWAT and the other RTPCs.

Enclosed for further background are the materials that were provided to the LPMC and made available to the public in advance of the January 11, 2021 meeting.

# Lamorinda Program Management Committee

---

The LPMC Administrator duties are rotated among the three Lamorinda agencies annually and we are in the process of transitioning from the City of Orinda to the Town of Moraga. Please provide your RTPC comments to Bret Swain, Senior Engineer of the Town of Moraga, at [bswain@moraga.ca.us](mailto:bswain@moraga.ca.us) Thank you.

Sincerely,



Jason Chen, LPMC Administrator

Enclosures: LPMC January 11, 2021 Agenda Package  
Public Communication Received as of 01-11-2021 8 a.m.

cc: Bret Swain, Moraga via email [bswain@moraga.ca.us](mailto:bswain@moraga.ca.us)  
Shawn Knapp, Moraga via email [sknapp@moraga.ca.us](mailto:sknapp@moraga.ca.us)  
Mike Moran, Lafayette via email [MMoran@ci.lafayette.ca.us](mailto:MMoran@ci.lafayette.ca.us)  
Lisa Bobadilla, SWAT via email [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov)  
John Hoang, CCTA via email [jhoang@ccta.net](mailto:jhoang@ccta.net)  
Matt Kelly, CCTA via email [mkelly@ccta.net](mailto:mkelly@ccta.net)

**Lamorinda Program Management Committee (LPMC) Meeting  
– January 11, 2021**

**Communication Received from the Public by January 11, 2021  
8 a.m.**

Enclosure Public Communications  
as of 1-11-2021 at 8 am

**Lamorinda Program Management Committee (LPMC) Meeting  
– January 11, 2021**

**Communication Received from the Public by January 11, 2021  
8 a.m.**



## Jason Chen

---

**From:** Paul Melmed <paulmelmed@gmail.com>  
**Sent:** Saturday, January 9, 2021 1:17 PM  
**To:** Jason Chen; lbodadilla@sanramon.ca.gov  
**Cc:** Paul Melmed  
**Subject:** Deny a short lane southbound on Pleasant Hill Road before Hwy 24

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

To: [lbodadilla@sanramon.ca.gov](mailto:lbodadilla@sanramon.ca.gov), [jchen@cityoforinda.org](mailto:jchen@cityoforinda.org)

From: Paul J. Melmed, Ph.D. 35 Prado Way Lafayette, CA 94549

RE: "Public Comment" 01/11/2021: Deny an additional southbound short lane on Pleasant Hill Road before HWY 24

### Attention LPMC members

**Danger: Keep the Gateway Constraint Policy as is, do not add a trap or short lane southbound before Hwy 24 on Pleasant Hill Road.**

Deny the staff report re: a trap lane or short lane to accommodate the O'Brien development of the Terraces of Lafayette apartments even before that project is fully vetted by the Superior Court of CCC. This is not only a premature action but also would show a conflict of interest of LPMC to favor a combative developer's profit driven plan. Terraces is a decade old extremely controversial project that was recently approved by Lafayette City Council. Of the five member council voting on the project in August 2020, two, including the Mayor have since stepped down. The new LPMC chairperson voted in favor of the project while acknowledging 13 unavoidable and unmitigatable conditions. The project is being contested in a formal lawsuit brought by over 4600 Lafayette residents. Putting 315 apartments at this location does not meet CEQA requirements, is in a VHFHSZ (Very High Fire Hazard Severity Zone) and would be putting ConFire and CCC Emergency Evacuation teams at greater risk during a serious event. With WAZE and other social media commuter traffic sites, such a short segment lane will only encourage more commuters to congest one of Lafayette's most heavily travelled interactions during peak hours (see the Elite Transportation formal report filed with the City of Lafayette). This will bring even more safety, health and emergency danger to students and staff of Acalanes High School, bikers and families who drop off their children or drive to surrounding schools including Springhill Elementary School and daycare centers.

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

## Jason Chen

---

**From:** Richard Drury <richard@lozeaudrury.com>  
**Sent:** Sunday, January 10, 2021 9:10 PM  
**To:** Jason Chen  
**Subject:** Save Lafayette Comment on Gateway Constraints Policy revision  
**Attachments:** 2021.01.10.Save Lafayette Constraints ComLtr.pdf

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

Dear Mr. Chen:

Attached please find the comments of Save Lafayette concerning Agenda Item 6 on the Lamorinda Program Management Committee meeting scheduled for Monday, January 11, 2021. Please provide this letter to the members of the LPMC. Thank you.

Richard Drury  
Counsel for Save Lafayette

--

Richard Drury  
Lozeau Drury LLP  
1939 Harrison Street, Suite 150  
Oakland, CA 94612  
(510) 836-4200  
[richard@lozeaudrury.com](mailto:richard@lozeaudrury.com)



T 510.836.4200  
F 510.836.4205

1939 Harrison Street, Ste. 150  
Oakland, CA 94612

[www.lozeaudrury.com](http://www.lozeaudrury.com)  
[richard@lozeaudrury.com](mailto:richard@lozeaudrury.com)

BY E-MAIL ONLY

January 10, 2021

Lamorinda Program Management Committee  
c/o Jason Chen  
Orinda City Hall  
22 Orinda Way  
Orinda, CA 94563  
e-mail: [JChen@cityoforinda.org](mailto:JChen@cityoforinda.org)

**Re: Opposition to Proposed Amendment to Southwest Area Transportation Committee (SWAT) for Request to Amend the Lamorinda Action Plan Gateway Constraint Policy for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph of Lamorinda Action Plan, 2017).**

Lamorinda Program Management Committee (LPMC):

I am writing on behalf of Save Lafayette, a non-profit organization composed of residents living in and around the City of Lafayette ("City") concerning the proposed Amendment ("Amendment") to the Southwest Area Transportation Committee (SWAT) for Request to Amend the Lamorinda Action Plan Gateway Constraint Policy (GCP) for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph of Lamorinda Action Plan, 2017). I sent a letter on December 7, 2020, and there appears to be no substantive response to this letter in the Staff Report. I request that that LPMC at the very least provide a substantive response to the December 7 letter, which is incorporated herein by reference.

In addition to the issues raised in the December 7, 2020 letter, Save Lafayette raises these additional issues.


First, LPMC has not provided adequate notice to sister agencies. Page 32 of the Lamorinda Action Plan (page 36 of the PDF) (<http://ccta-swat.net/wp-content/uploads/2014/07/2009-Lamorinda-Action-Plan.pdf>) provides that if a project would result in 100 or more new trips (which the Lafayette Terraces project would do), then the adjacent Regional Transportation Planning Committees (RTPCs) must be notified. This would include SWAT-Tri Valley and Transpac. It appears that such notice has not been provided. The decision must be continued to allow for notice to the RTPCs.

Second, the staff report for the LPMC meeting makes clear that that the sole reason for the trap lane proposal is to facilitate the Lafayette Terraces project, and that the LPMC is relying upon the CEQA Addendum ("Addendum") certified by the City of Lafayette ("City") for the Terraces Project. However, Save Lafayette has sued the City alleging that the Addendum is legally insufficient and that a supplemental environmental

impact report (SEIR) is required. If Save Lafayette is successful, then the CEQA Addendum and the approval of the Terraces Project itself must be set aside. Therefore, there is no reason for the LPMC to approve the trap lane at least until the pending CEQA litigation is set aside. Quite simply, if the court sets aside the Addendum and Project approval, then the trap lane will be unnecessary. Since LPMC is relying on the alleged flawed CEQA Addendum, then its decision must also be set aside. If LPMC proceeds to approve the trap lane, then Save Lafayette will have no option other than to sue LPMC by amending the agency into the pending lawsuit as a Respondent agency in order to set aside LPMC's decision. It seems much more prudent for LPMC simply to wait for the outcome of the pending litigation and then decide at that time whether or not to approve any trap lane.

For the foregoing reasons, and the reasons set forth in our letter of December 7, 2020, Save Lafayette urges LPMC to continue the consideration of the trap lane proposal at least until resolution of the pending litigation challenging the Terraces Project and its CEQA Addendum. Thank you for considering our comments.

Sincerely,



Richard Drury  
LOZEAU DRURY LLP

## Jason Chen

---

**From:** Jenifer Lamken Paul <jenlamkenpaul@hotmail.com>  
**Sent:** Sunday, January 10, 2021 12:52 PM  
**To:** Jason Chen; lbobadilla@sanramon.ca.gov  
**Subject:** LPMC 1/11/21 - Agenda item 6

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

Dear Members of the Lamorinda Program Management Committee,

I am writing to you to oppose the amendment to the Gateway Constraint Policy agenda item 6 for your meeting on Monday, January 11th, 2021.

As I stated in a letter to this committee in December of 2020, the Gateway Constraints Policy should not be changed and certainly not solely based on the Terraces Project as your agenda item states it is. That Project is currently involved in a lawsuit. Furthermore, residents should be given much better notice about meetings involving topics like this. Input from the community and should be considered and should have been posted in various ways such as on Nextdoor and via city communications. I had asked that you consider placing "A" frame boards up with notices at the intersection of Pleasant Hill Road, Deer Hill Road, and Stanley Boulevard for any future meeting involving this intersection.

As I also stated in my previous letter, in 2013, the firm TJKM studied the addition of the southbound lane, and beyond the obvious that it conflicted with the Gateway Constraints Policy, they found several negative potential impacts. For example:

- \*It would increase the pedestrian crossing distance on the Pleasant Hill Road crosswalk at the Deer Hill Road – Stanley Boulevard signal, which a high volume of Acalanes High School students currently uses.

- \*It would result in secondary negative impacts such as:

  - \*loss of existing curb parking

    - \*loss or loading zones along the west curb

    - \*loss of the designated spaces currently used for school passenger loading which would cause hazardous passenger loading activity at unsuitable locations.

- \*The intersection would still operate at LOS F

Source - EIR 4.13 Pgs. 36-40

<https://link.edgepilot.com/s/90efbccb/juGp9uKTa0eyu0JFoFXGpg?u=https://www.lovelafayette.org/home/showdocument?id=1553>

In 2017, Lafayette hired TJKM to conduct a Pleasant Hill Corridor Study. On Pages 19 and 20, you can read the section where TJKM again evaluated to see if extending the southbound right-turn storage lane could help mitigate the existing traffic conditions. TJKM said this change would not have any material benefit on southbound movement.

Source - TJKM 2017 Pleasant Hill Road Corridor Study, Pgs. 19-20

[https://link.edgepilot.com/s/351d3860/cWFbER-DzkeCOD2xVIC\\_Lw?u=https://www.lovelafayette.org/home/showdocument?id=3995](https://link.edgepilot.com/s/351d3860/cWFbER-DzkeCOD2xVIC_Lw?u=https://www.lovelafayette.org/home/showdocument?id=3995)

In 2020, TJKM studied the area again and stated that “adding more capacity for southbound through movements at Deer Hill Road does **have the potential to increase speeds upstream and attract more drivers onto the corridor**. Initial simulations using SimTraffic suggest that this would be the case. **As such, the proposed lane may violate both the letter and spirit of the Gateway Constraints Policy.**”

Source TJKM 2020 Terraces of Lafayette Impact Study, Pgs. 90-98

[https://link.edgepilot.com/s/9d03f79a/Lel-](https://link.edgepilot.com/s/9d03f79a/Lel-qX2Z0mC6t4uwJucCg?u=https://lafayette.granicus.com/MetaViewer.php?view_id=19%26clip_id=4753%26meta_id=111125)

[\\_qX2Z0mC6t4uwJucCg?u=https://lafayette.granicus.com/MetaViewer.php?view\\_id=19%26clip\\_id=4753%26meta\\_id=111125](https://lafayette.granicus.com/MetaViewer.php?view_id=19%26clip_id=4753%26meta_id=111125)

**The Gateway Constraints Policy was implemented to LIMIT the impacts to residents.** This amendment to add a “Short-Link Southbound Lane on Pleasant Hill Road as part of the Proposed Terraces of Lafayette Project” will do the opposite and I urge you to reject it.

Sincerely,  
Jenifer Paul  
Lafayette, CA

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

## Jason Chen

---

**From:** Jenifer Lamken Paul <jenlamkenpaul@hotmail.com>  
**Sent:** Sunday, January 10, 2021 8:48 PM  
**To:** Jason Chen; lbobadilla@sanramon.ca.gov  
**Cc:** cityhall@lovelafayette.org; scandell@lovelafayette.org  
**Subject:** LPMC 1/11/21 - Agenda item 6  
**Attachments:** pg 36flowchartLamorindaActionPlan.pdf; CCTA GMP Action Plan Update Process Flowchart.pdf

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

Dear Members of the LPMC,

I have previously written to you regarding my opposition to your proposed approval of item 6 on your agenda for tomorrow's meeting, "Addition of a Short-Link Southbound Lane on Pleasant Hill Road as part of the Proposed Terraces of Lafayette Project"

However, I wanted to bring another piece of information to your attention. The flow chart from the Lamorinda Action Plan presents a different pathway than the one that is being presented in the Lafayette staff report which is from CCTA. I have also attached both flow charts to this email. The Lamorinda Action Plan flow chart can also be found on Page 36 using this link: <https://link.edgepilot.com/s/cca6559f/3ez6Q5qISk6tDTfzbzlqdg?u=http://ccta-swat.net/wp-content/uploads/2014/07/2009-Lamorinda-Action-Plan.pdf>

As you will see, the Lamorinda Action Plan Action Review Process is for General Plan Amendments and Projects. It states that if a project would result in 100+ new trips, which the Terraces would do, then adjacent Regional Transportation Planning Committees (RTPC) have to be notified. That would therefore not just be SWAT-Lamorinda. It would include other RTPCs such as SWAT-Tri Valley and Transpac since this would impact them as well.

I did read in the staff report that according to the CCTA flowchart, "it should be noted the proposed amendment will be escalated to the Southwest Area Transportation Committee (SWAT) regardless of the input from LPMC or the input from the other regional transportation planning committees (RTPCs). The CCTA Board will be making the final decision on whether to amend the Action Plan. LPMC and SWAT are advisory committees making a recommendation to the CCTA Board." And that one of the two action items directs the "LPMC review, provide comments, and distribute the recommended language for amending the Lamorinda Action Plan to all of the regional transportation planning committees (RTPCs) within Contra Costa County for comment." However, I question why we are not looking at the Lamorinda Action Plan Process first. This report seems to dismiss the importance of notifying other RTPCs yet the Lamorinda Action Plan appears to make that a priority.

I am writing to bring this to your attention and to make sure we follow the process set forth in the Lamorinda Action Plan.

Sincerely,  
Jenifer Paul  
Lafayette, CA

**From:** Jenifer Lamken Paul <jenlamkenpaul@hotmail.com>

**Sent:** Sunday, January 10, 2021 12:52 PM

**To:** Jason Chen <jchen@cityoflorinda.org>; lbobadilla@sanramon.ca.gov <lbobadilla@sanramon.ca.gov>

**Subject:** LPMC 1/11/21 - Agenda item 6

Dear Members of the Lamorinda Program Management Committee,

I am writing to you to oppose the amendment to the Gateway Constraint Policy agenda item 6 for your meeting on Monday, January 11th, 2021.

As I stated in a letter to this committee in December of 2020, the Gateway Constraints Policy should not be changed and certainly not solely based on the Terraces Project as your agenda item states it is. That Project is currently involved in a lawsuit. Furthermore, residents should be given much better notice about meetings involving topics like this. Input from the community and should be considered and should have been posted in various ways such as on Nextdoor and via city communications. I had asked that you consider placing "A" frame boards up with notices at the intersection of Pleasant Hill Road, Deer Hill Road, and Stanley Boulevard for any future meeting involving this intersection.

As I also stated in my previous letter, in 2013, the firm TJKM studied the addition of the southbound lane, and beyond the obvious that it conflicted with the Gateway Constraints Policy, they found several negative potential impacts. For example:

- \*It would increase the pedestrian crossing distance on the Pleasant Hill Road crosswalk at the Deer Hill Road – Stanley Boulevard signal, which a high volume of Acalanes High School students currently uses.

- \*It would result in secondary negative impacts such as:

  - \*loss of existing curb parking

  - \*loss or loading zones along the west curb

  - \*loss of the designated spaces currently used for school passenger loading which would cause hazardous passenger loading activity at unsuitable locations.

- \*The intersection would still operate at LOS F

Source - EIR 4.13 Pgs. 36-40

<https://link.edgepilot.com/s/27c4e690/yqyFABsND0eOsF8MPtxv8w?u=https://www.lovelafayette.org/home/showdocument?id=1553>

In 2017, Lafayette hired TJKM to conduct a Pleasant Hill Corridor Study. On Pages 19 and 20, you can read the section where TJKM again evaluated to see if extending the southbound right-turn storage lane could help mitigate the existing traffic conditions. TJKM said this change would not have any material benefit on southbound movement.

Source - TJKM 2017 Pleasant Hill Road Corridor Study, Pgs. 19-20

<https://link.edgepilot.com/s/f81096f3/e0oUMtuxyUu8-tJz9WUkmQ?u=https://www.lovelafayette.org/home/showdocument?id=3995>

In 2020, TJKM studied the area again and stated that "adding more capacity for southbound through movements at Deer Hill Road does **have the potential to increase speeds upstream and attract more drivers onto the corridor**. Initial simulations using SimTraffic suggest that



this would be the case. **As such, the proposed lane may violate both the letter and spirit of the Gateway Constraints Policy."**

Source TJKM 2020 Terraces of Lafayette Impact Study, Pgs. 90-98

[https://link.edgepilot.com/s/f370c148/00MLj0DDo0GdHa-\\_B1GQNw?u=https://lafayette.granicus.com/MetaViewer.php?view\\_id=19%26clip\\_id=4753%26meta\\_id=111125](https://link.edgepilot.com/s/f370c148/00MLj0DDo0GdHa-_B1GQNw?u=https://lafayette.granicus.com/MetaViewer.php?view_id=19%26clip_id=4753%26meta_id=111125)


**The Gateway Constraints Policy was implemented to LIMIT the impacts to residents.** This amendment to add a "Short-Link Southbound Lane on Pleasant Hill Road as part of the Proposed Terraces of Lafayette Project" will do the opposite and I urge you to reject it.

Sincerely,  
Jenifer Paul  
Lafayette, CA


Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

- (b) If the results of the monitoring effort show that a regional route has exceeded the adopted MTSO, a focused Action Plan may be prepared by the RTPC; and
- (c) A complete review of the Lamorinda Action Plan shall be conducted on a four-to-five-year cycle (jointly by the RTPC and CCTA) in coordination with updates to the Authority's Countywide Comprehensive Transportation Plan Update.

**Figure 12: Action Plan Review Process for Lamorinda GPAs and Projects**

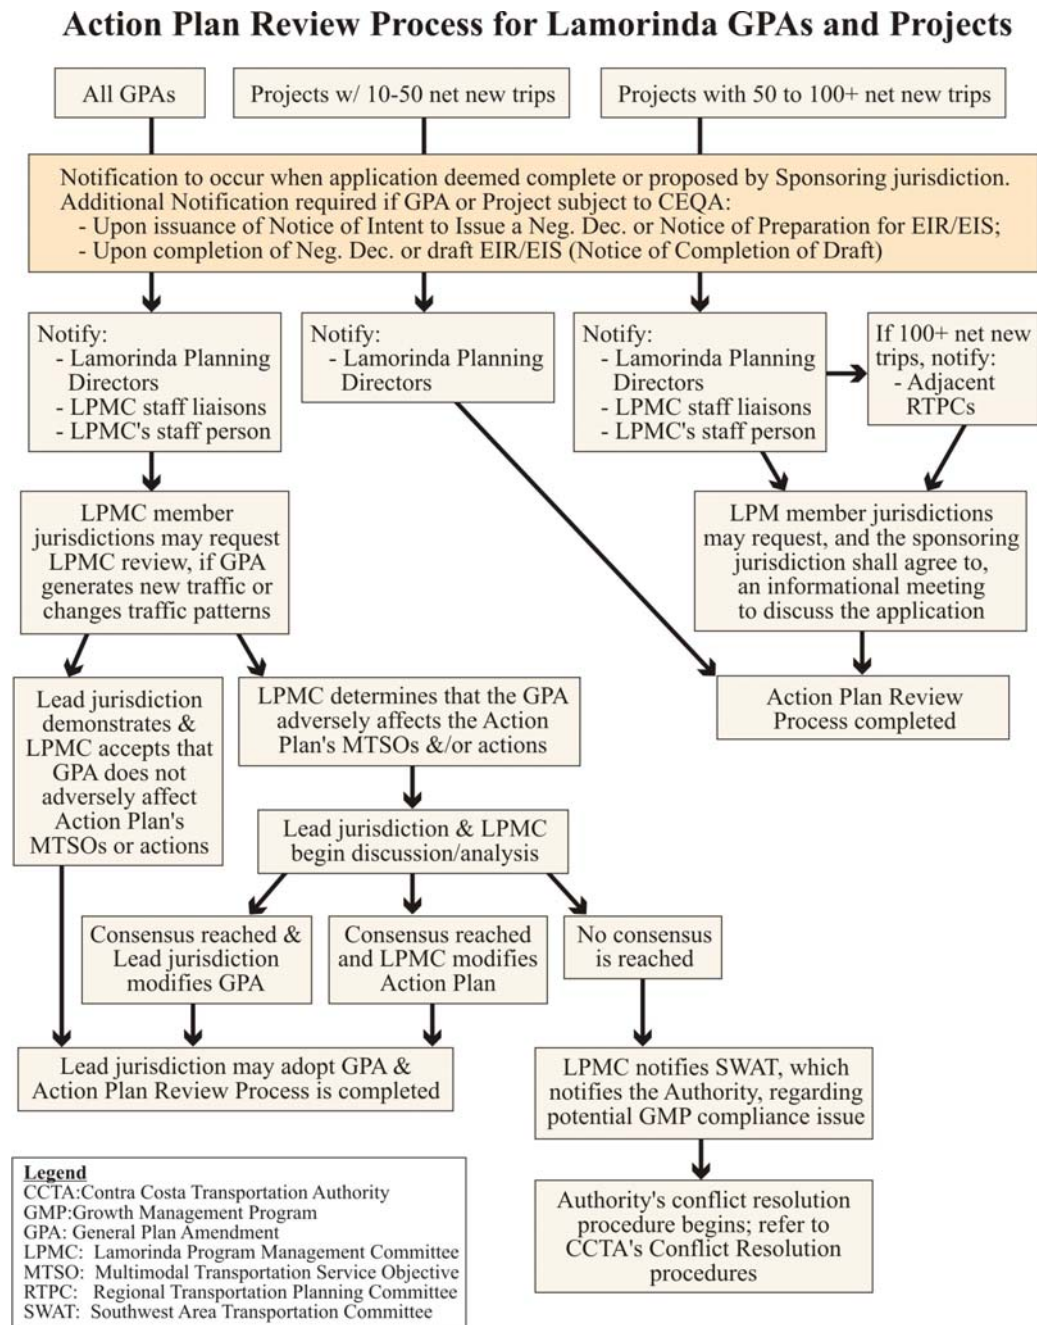

# CCTA Growth Management Program (GMP) Action Plan Update Process

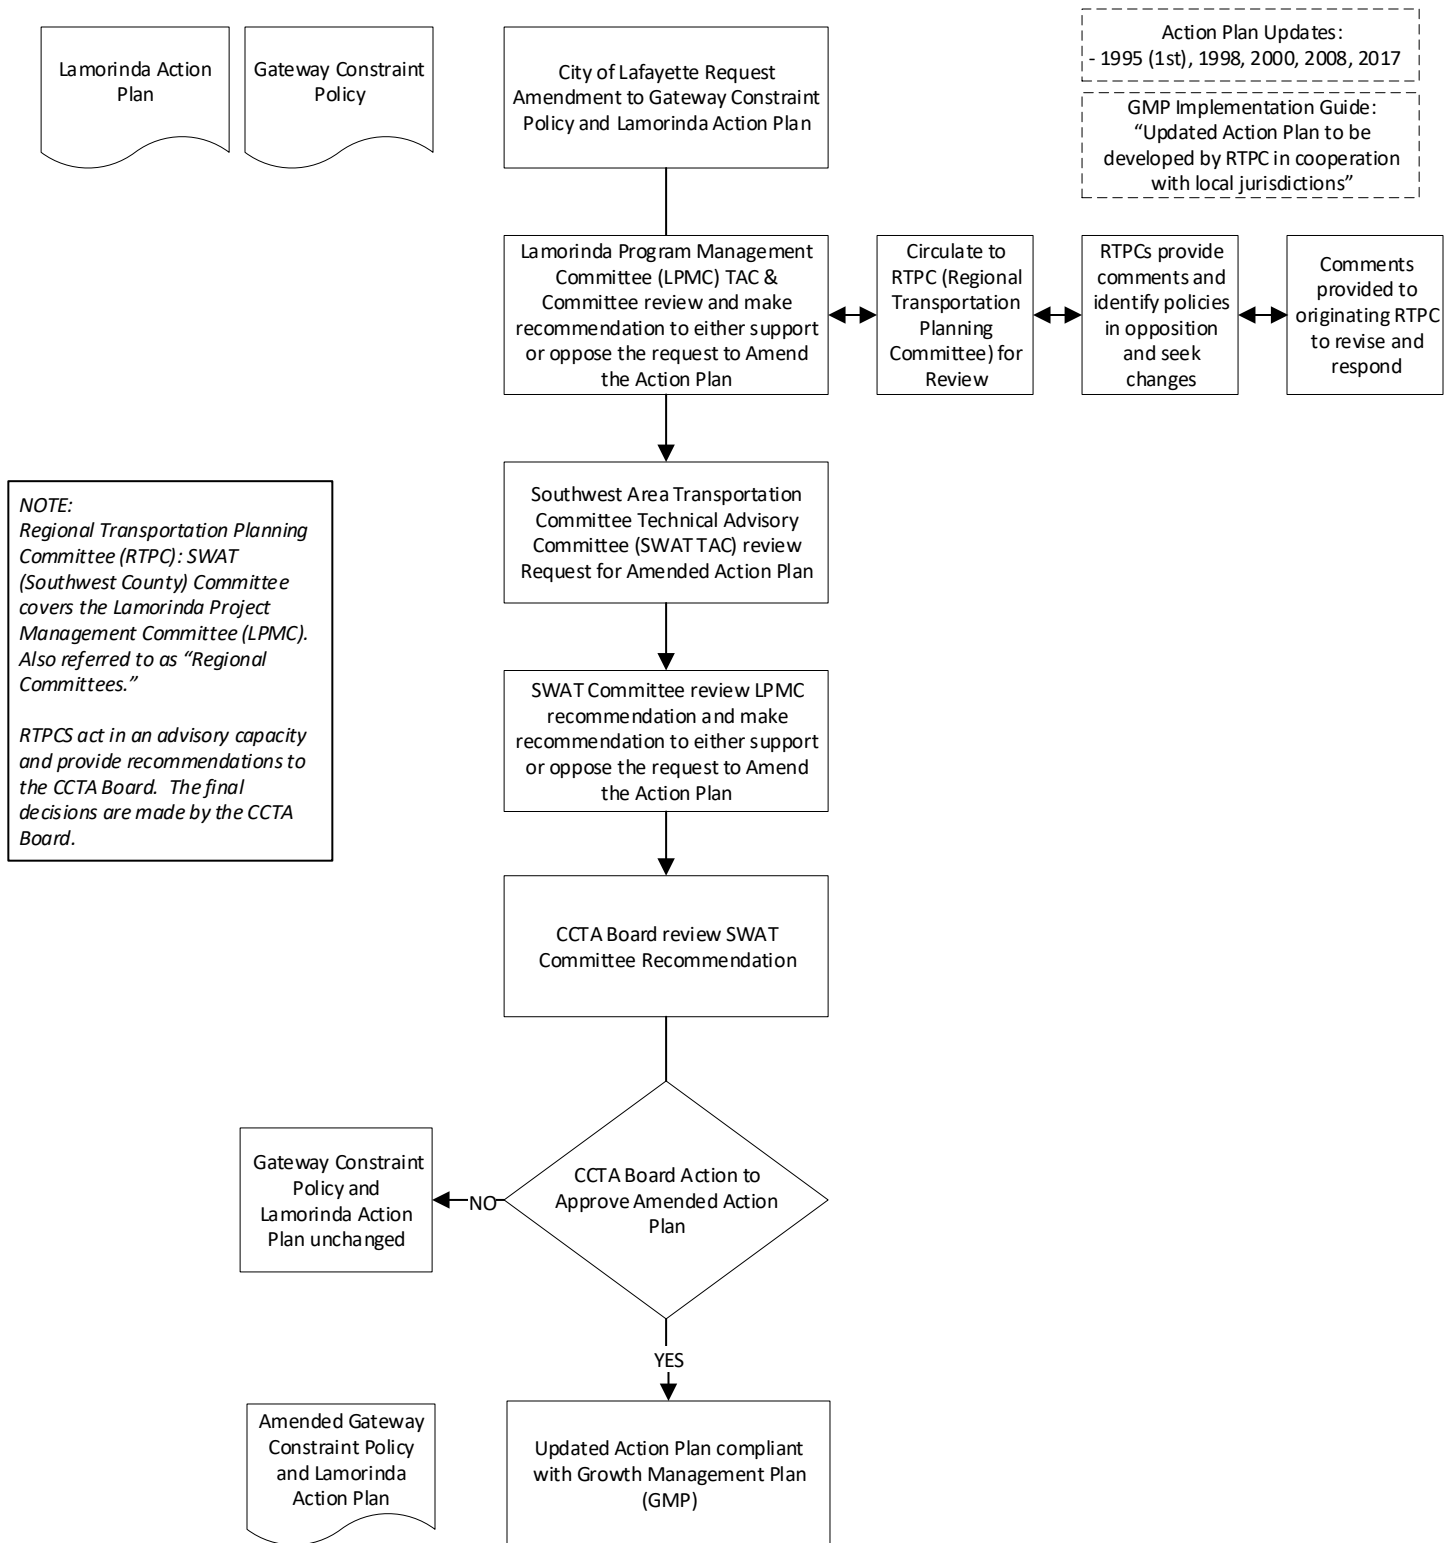

## Sivakumar Natarajan

---

**From:** Kristen Altbaum <altbaum@icloud.com>  
**Sent:** Friday, January 8, 2021 3:43 PM  
**To:** Joanne Robbins; Jason Chen; Bobadilla, Lisa  
**Subject:** LPMC meeting - necessary information - please circulate today, thanks.  
**Attachments:** Travis Bell endorsement (1).pdf; Ltrr fm Con Fire re RVR problems.pdf; Elite Evacuation Model .pdf; PDF-Streetlight data for PH Rd by segment and time period.pdf

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

Joanne and Jason - please make sure this circulates TODAY to all of the members of the below organizations. Thanks for your help.

LMPC, SWAT, CCTA:

I'd like to share this with you today and during the next LPMC meeting via screen sharing.

Please allow this you tube video link to load. The left, congested lane, is an average non-covid southbound commute on PH Rd:

<https://link.edgepilot.com/s/7827ed1c/65AT1rrUBkeWJ1ZVAPRXdA?u=https://www.youtube.com/watch?v=Uw1x0o7lTs0>

This is what an average p.m. Deer Hill eastbound commute looks like from BART 1.5 miles to Pleasant Hill Rd:

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.





These are what average side streets to Pleasant Hill Rd look like during a.m. peak:

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.



This one is 3 miles from the bottle neck of PH and Deer Hill Rd. - these cars are not waiting at a light or stop sign, they are crawling ever so slowly over 3 miles. Multiple people have seen Acalanes students passing around 10-15 of these cars at a time on the wrong side of the road, just to try and make it to 1st period on time!

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.



Dozens more photos and videos can be found on the Facebook group: <https://link.edgepilot.com/s/8657d5b3/2DR6mURYm0GqX4tp96OZWw?u=https://www.facebook.com/groups/1753415531541790>, which has been in existence since 2016. I created this group after being HORRIFIED as to how long it was taking our students to get to school - school commutes rose from 6 minutes to over 35 over just 3 miles. 6 miles to Stanley middle school often takes over an hour.

Our local school principals and superintendents have written multiple letters with concerns about student tardiness and safety, as did ex fire Chief Carmen, and our school bus company. These are just a few of the letters that were written. I'm happy to forward additional letters.

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.



## LAMORINDA SCHOOL BUS PROGRAM

A cooperative effort by the communities of Lafayette, Orinda, Moraga and the Contra Costa Transportation Authority to mitigate traffic.

November 9, 2017

Lafayette City Council


Re: Reliez Valley Rd.

Dear Mayor Anderson and Council Members:

The Lamorinda School Bus Program has experienced increased traffic on Reliez Valley Rd. over the last several years as noted in First Student's letter to the Reliez Valley Residents for Reduced Traffic (RVRRRT) dated October 13, 2017. The increased traffic has resulted in earlier pick up times in the a.m. for all three school buses running through the Reliez Valley/Pleasant Hill Rd. corridor. The illegal and unsafe passing of school buses by private vehicles on Reliez Valley Rd. is also an ongoing issue. We have requested (and received) enforcement from the Lafayette Police Department, but unfortunately the problem persists.

Please feel free to contact me with any questions at (925) 299-3216 or [jhansen@cl.lafayette.ca.us](mailto:jhansen@cl.lafayette.ca.us).

Sincerely,




Juliet Hansen

Program Manager

Lamorinda School Bus Program

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

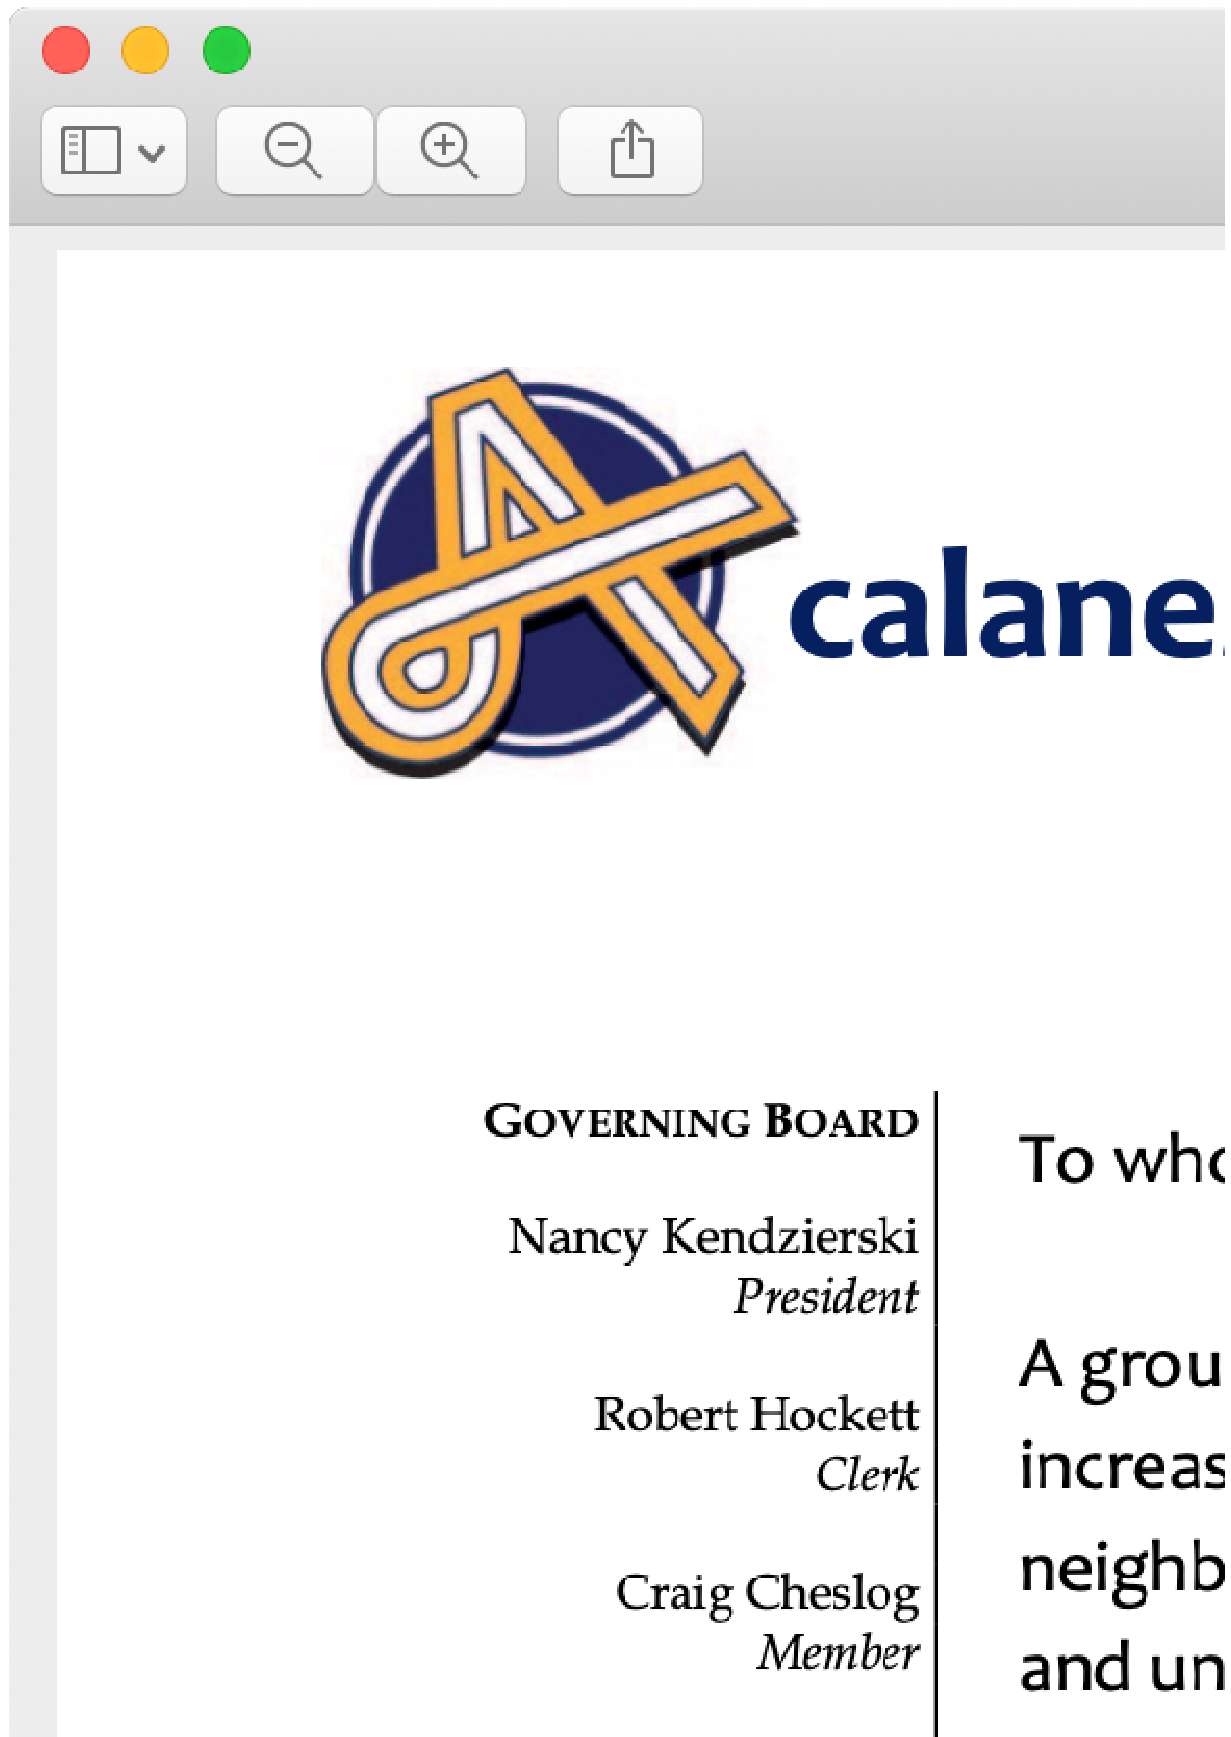

TJKM would most recently have you believe that delays are <2.0, but their analysis is not considered credible for multiple reasons. Elite Transportation and Streetlight are both aligned in delays being longer than TJKM data shows.

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

TJMK ADMITTED TO NOT HAVING STUDIED THE ADDITIONAL TERRACES STUDENTS IN CROSSWALKS AND HOW THOSE PEDESTRIANS WOULD AFFECT TRAFFIC THAT ALREADY EXISTS. THIS IS WHAT THAT INTERSECTION WILL LOOK LIKE, SO I ASK YOU - HOW EFFECTIVE WILL A NEW RIGHT HAND TURN LANE BE, WHEN IT A) IS FILLED UP WITH MORE WAZE TRAFFIC COMING OF HWY 680 (WHEN WE CREATE MORE CAPACITY FOR SOLO OCCUPANT CARS, THE TRAFFIC APP ALGORITHMS SHIFT THE TRAFFIC TO "FILL UP" THAT CAPACITY; AND 2) HAS TO TURN AGAINST, AND WAIT FOR, A SLEW OF NEW TERRACES STUDENTS WALKING TO SPRINGHILL AND ACALANES DURING PEAK?

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.



ACTUALLY PROPOSED DEER HILL RD/PLEASANT HILL RD INTERSECTION



You guys have a responsibility to tax payers to make good on the goals and objectives laid out in the Lamorinda Action Plan on growth is to be handled, PARTICULARLY BECAUSE THIS IS A HIGH RISK FIRE ZONE.

The Lamorinda Action Plan says the following:

2008, page 5:

*1) where appropriate, provide priority for buses, carpools; Establish and maintain LOS standards on major arterials. 2) Reduce automobile demand by promoting and accommodating ridesharing, transit, bicycling, walking, and telecommuting. 3) Discourage freeway bypass traffic on Lamorinda roads.*

2008, page 6:

1. *Pursue actions to meet or sustain service objectives that will reduce reliance on single occupant automobile travel.*
2. *Avoid the addition of roadway capacity for single-occupant vehicles.*
3. *Enhance mobility by providing alternative travel options.*
4. *Actions should not lead to an increase in the use of BART parking in Lamorinda by people driving into the area from outside communities.*
5. *Pursue actions to improve safety of travelers by all modes.*
6. *Encourage through-trips and interregional travel to stay on freeways and discourage diversion of these trips to arterial and local streets as a mechanism for ensuring intraregional mobility.*
7. *Maintain capacity constraints at selected gateways*

8.

9. 2008Page 7

1. *Establish CCCTA bus service on Pleasant Hill Road and/or Taylor Boulevard that has a composite frequency of at least two buses per hour during peak commute and school times (6:30 AM – 9:30 AM and 3:30 PM – 6:30 PM) and direct connection to the Lafayette BART station.*
2. *Maintain school bus service on Pleasant Hill Road and Taylor Boulevard.*
3. *Maintain a maximum wait time for drivers on side streets wishing to access Pleasant Hill Road or Taylor Boulevard of one signal cycle or less.*
4. *Maintain peak hour peak direction delay index of 2.0 or lower.”*

*Proposed Actions for Pleasant Hill Rd (Lamorinda Action Plans 2008, page 25):*

- 4) *If the CCCTA cannot increase service to Acalanes School, evaluate the feasibility of augmenting the existing school bus program to add the high school as funding permits*
- 6) *Support development of HOV lane programs on all freeways and regional routes where feasible*
- 7) *Support the provision of public transit service in the Pleasant Hill Road / Taylor Boulevard Corridor with connections to BART and other CCCTA services in Lafayette*
- 8) *Support the provision of Park and Ride lots north of Lafayette's segment of Pleasant Hill Road*
- 10) *Investigate appropriate mechanisms, including maintaining existing roadway lanes and widths and restrictive signal timing, to discourage use of Pleasant Hill Road as a substitute for freeway travel*
- 11) *Support pedestrian and bicycle safety improvements around schools, trailheads, and at intersections and along the bikeway network*
- 12) *Work with TRANSPAC to develop a traffic management program to encourage delay in order to discourage use of westbound/southbound traffic using Pleasant Hill Road to bypass the I-680 SR 24 interchange*

***So I ask you, if you permit a solo occupant short lane segment and turn lane, and resources are spent on this, are you doing your job per the goals and objectives of the Lamorinda Action Plan which should be your ultimate guide No. You need to FOLLOW THE LAMORINDA ACTION PLAN, PAID FOR BY TAX PAYERS. THIS IS HOW WE COME TO TRUST YOU. DO NOT MODIFY THE GATEWAY CONSTRAINT POLICY WITHOUT MINIMALLY REQUIRING PEDESTRIAN BRIDGES, PROTECTED BIKE LANES, MORE BUSING, AND CARPOOL LANES ALONG PLEASANT HILL RD.***

***LET'S MAKE CIRCULATION IN THIS AREA THE BEST IT CAN BE. BEING LAZY, BECAUSE YOU DON'T LIVE HERE, AND ADDING SOLO LANES TO APPEASE A DEVELOPER AND A CITY DETERMINED TO AVOID A LAWSUIT, IS KNOWINGLY MAKING IT WORSE. MORE SOLO LANES ACROSS FROM A HIGHSCHOOL AND NEXT TO MORE UNPROTECTED PEDESTRIANS AND UNPROTECTED BIKE LANES IS POTENTIALLY DEADLY, PARTICULARLY WITH MANY FRUSTRATED, LATE DRIVERS ON THE ROADWAY.***

***THIS AREA NEEDS A HOLISTIC PLAN LAID OUT BY A SOPHISTICATED, STATE OF THE ART TRANSPORTATION CONSULTANT. ANYTHING LESS WILL RESULT IN DEATH. MY CONSCIENCE AND LOVE FOR MY COMMUNITY PROPELS ME TO GO ON RECORD AND MAKE SURE YOU ARE AWARE OF THIS AHEAD OF ANY DECISION YOU MAKE.***

***— KRISTEN ALTBAUM***

***Reliez Valley resident since 1998.  
925-285-8309***

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.



February 1, 2018

To Whom It May Concern:

Residents of the Reliez Valley Road neighborhoods in Lafayette have voiced concerns regarding travelling on Reliez Valley Road, particularly during the A.M. commute.

Based on photographs provided by the neighbors and the personal experiences of Fire District staff moving through the area, there has obviously been a marked increase in congestion through the corridor. Although a significant number of people moving through the area are going to the local schools, the congestion cannot be attributed to school traffic alone. A significant number of vehicles are using Taylor Road, Reliez Valley Road, and Pleasant Hill Road as bypasses to Interstate 680. It is not uncommon for morning traffic on Taylor Road to back up onto Geary Road.

The traffic situation through this area definitely has an impact on fire responses. Engine 2, responding from Geary Road to calls along the Taylor Road corridor, has significantly increased response times during that time of the morning. If there were to be a fire call, or a severe medical call, on Reliez Valley Road, we might experience significant difficulty in getting to the scene. This is the case even if traveling in the non-commute direction because of people passing illegally and just general congestion. Making a left turn across the traffic direction would be especially difficult.

While the traffic situation is a definite concern during the school year, there is not much improvement when school is on break. We bring this to your attention because there is a high level of wildland fire danger in certain areas of Reliez Valley Road. During a high wind event, the combination of high traffic congestion from commuters and potential evacuee traffic could make response into the area very difficult for fire resources.

The Contra Costa County Fire Protection District is supportive of all solutions that would improve the quality of life for the residents along the Reliez Valley Road corridor. Any solutions that help the residents would also improve our ability to respond in the case of an emergency. We do not feel that doing nothing is a viable option.

The Fire District would welcome the opportunity to meet with stakeholders in order to evaluate possible solutions. Please let us know if you identify anything specific that we can do to help.

Sincerely,

  
Jeff Carman  
Fire Chief



---

**Acalanes High School**  
***"Home of the Dons"***

1200 Pleasant Hill Rd. Lafayette CA 94349 | (925) 280-3970 | FAX: (925) 280-3971

---

September 27, 2017

To Whom it May Concern:

I received a request to voice my concern regarding the increased traffic on Reliez Valley Road during morning commute time. It is assumed this is due to an increase in the use of driving traffic applications such as "Waze" rerouting "fastest routes" for commuters. While it may very well be that fastest routes are side residential roads, it has been reported to me by multiple students and parents that commute traffic specifically on Reliez Valley Road has significantly impacted traffic safety and the time and stress of students getting to school.

As the principal of Acalanes High School, it is important to me that students have access to a safe route to school. While my background and training is in educational leadership, I do think it is imperative that appropriate city and county agencies evaluate and consider solutions that keep roads designed as local community streets free from heavy outside use and therefore helping our students get to school in a safe and calm manner. We would hate to wait for a tragic accident to be the impetus for the needed regulation and change.

I would also like to highlight that the Acalanes Union High School District as a whole recently changed the school-day schedule to include three "late start days" for students, wherein the first period of instruction is 8:30AM versus, what was for many years standard, 8:00AM. This was done in an effort to allow students an opportunity for more sleep and decreasing student stress as indicated as a high priority for all stakeholders. The current traffic situation on Reliez Valley Road hinders the positive movement made by the school district for those students that have reported having to wake up significantly earlier than previous years to leave before traffic builds.

Please reach out if you have any questions or concerns. I appreciate your consideration of this issue.


Best,

Travis Bell  
Principal  
Acalanes High School





Heatmap of Congestion

Colors indicate the on each Segment during the selected time period.

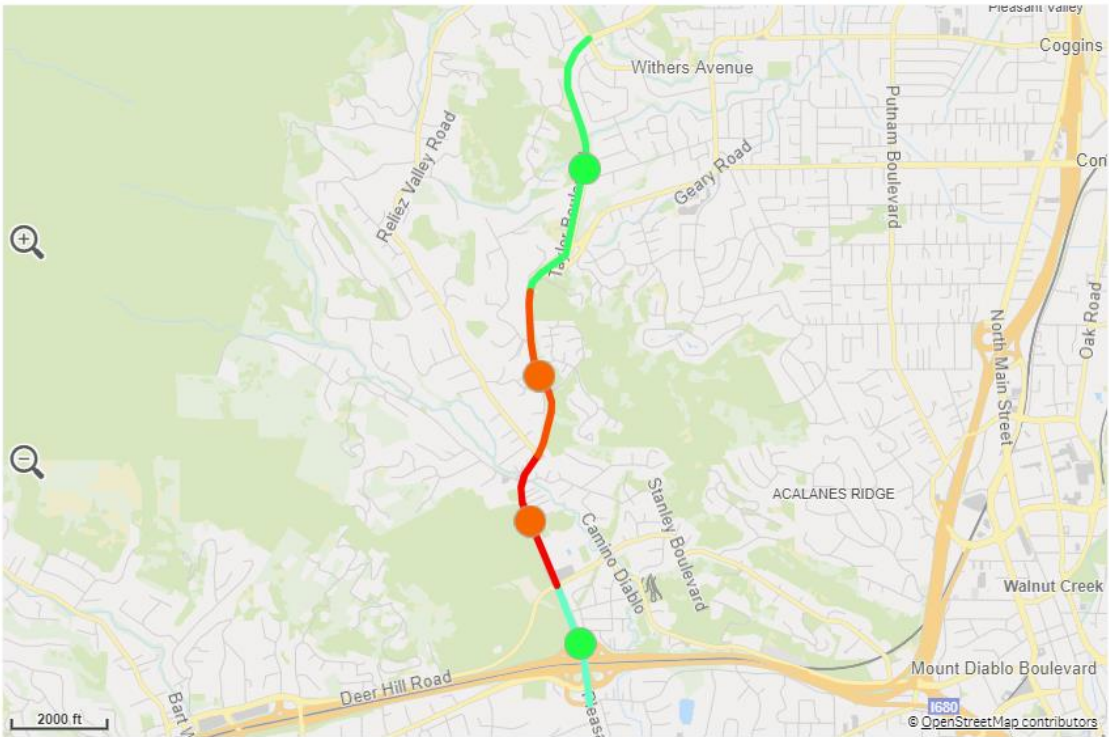

Congestion

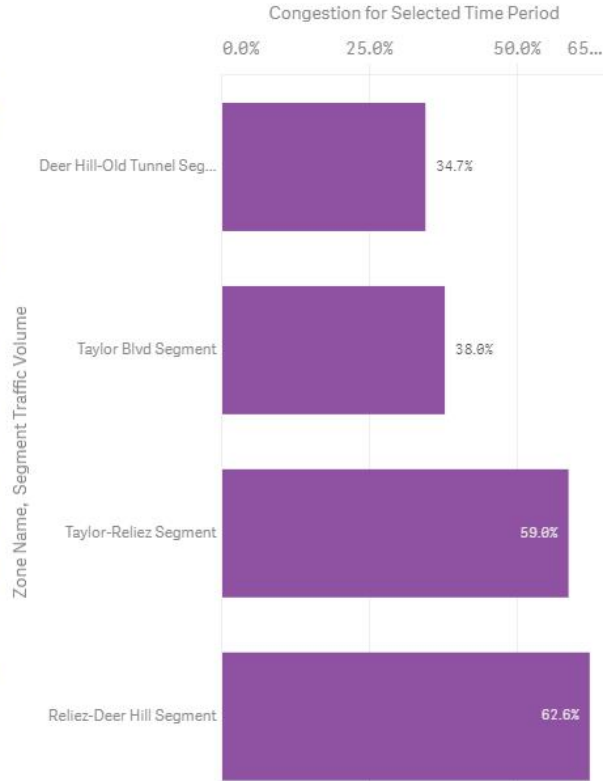


SB Peak AM (7:00-9:00am)


STREETLIGHT DATA PROPRIETARY AND CONFIDENTIAL

Heatmap of Congestion


Colors indicate the on each Segment during the selected time period.

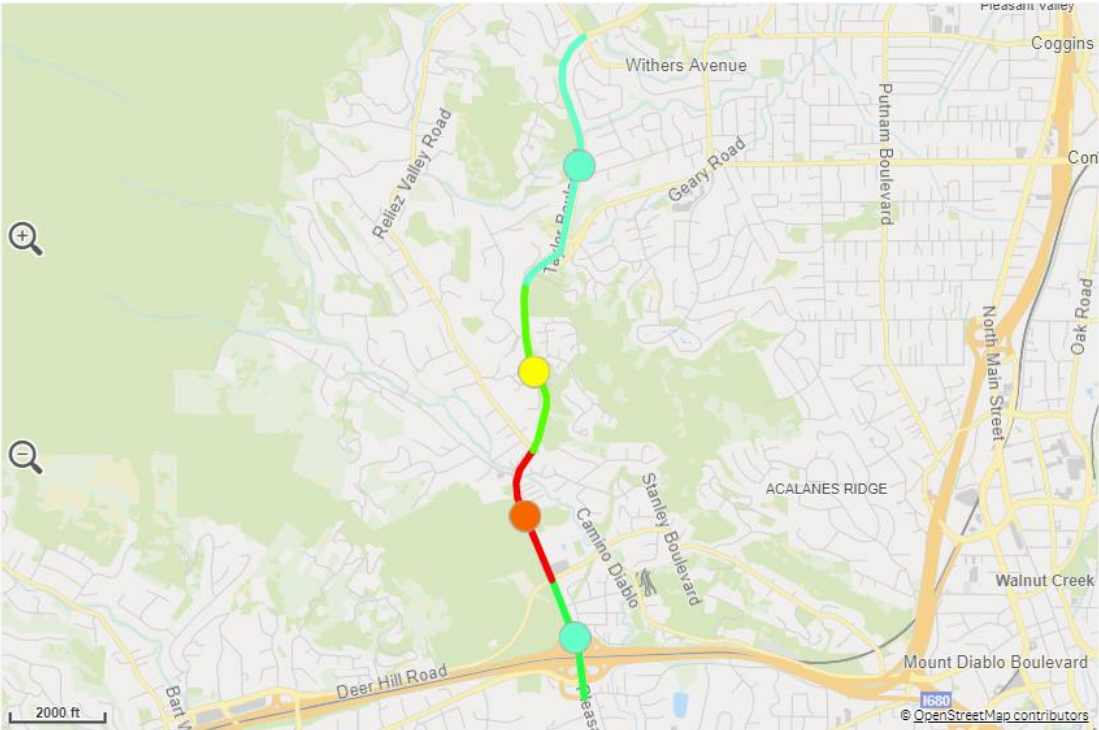

Congestion

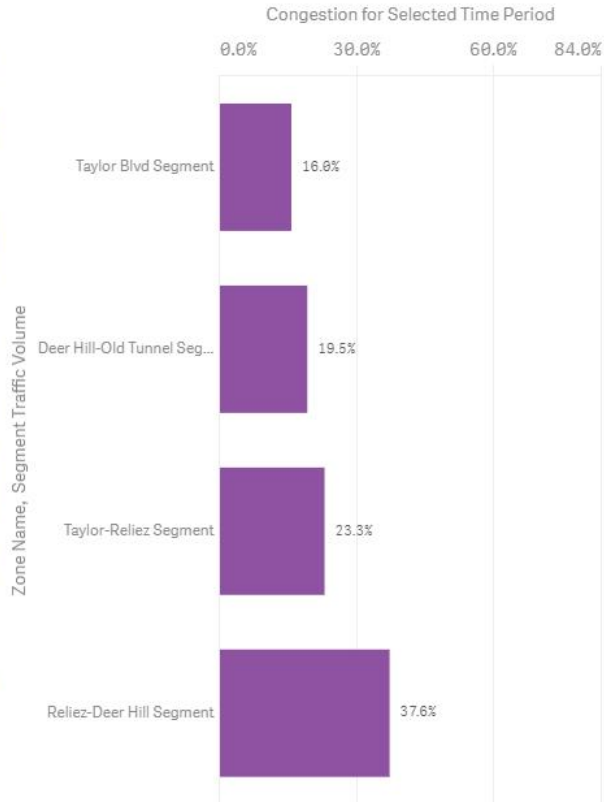

NB Peak PM (4:00-7:00pm)





August 24, 2020

**Re: Terraces of Lafayette Emergency Evacuation Traffic Impact Study**

Dear Mayor and Council Members

Apologies for the lateness in getting this to you, but we have been working on this since we got the latest TJKM memo on Tuesday. Attached is another memo prepared by Elite that reviews the TJKM memorandum dated August 10, 2020, which was a response to Elite's last memo of August 8, 2020. In addition, Elite has now run various simulations of the TJKM model, firstly to check they could duplicate TJKM's results, which they did, but then to look deeper at the results to answer some critical questions, such as "how many vehicles can actually get out if there was a fire". **Elite's findings are shocking**, and are summarized as follows:

1. Within the Terraces project including the Trap lane, of the 551 cars assumed, only 208 are able to get out in the first hour of the evacuation. 343 will be stuck. If there is no Trap lane **only 16 cars will make it out in the first hour** - 535 cars will be stuck in their driveways and unable to get to Pleasant Hill Road. This directly contradicts what the fire chief has been saying that he is not worried about the Terraces because it is by the freeway.
2. For evacuating traffic from the surrounding area, the situation is also bad. **If there is no trap lane built with the project, an additional 553 neighborhood cars will be stuck in their driveways after the first hour and unable to get to Pleasant Hill Road.** Adding the trap lane drops this to 152 extra cars stuck, but that is still 152 cars too many.
3. This explains TJKM's earlier conclusion that the Terraces only adds 10 to 16 seconds extra delay on Pleasant Hill Road; this is because the majority of evacuation traffic from the Terraces can't even make it to Pleasant Hill Road.
4. Another direct result is that TJKM's assumption that some parents will be able to pick up students from the schools on their way out is invalid – some of these parents don't even make it to Pleasant Hill Road in the first hour.
5. Elite looked at TJKM's response that although they started with an empty network, they did seed the network with some traffic before the evacuation begins. This is true, but TJKM only seeded it with enough traffic to form a back up from Deer Hill Road half way to Springhill Road. See page 8 of TJKM's memo for an illustration. This is not heavy commute hour traffic, and so the model is not being at all conservative in this respect.
6. Note that all these results are based on TJKM's assumption in the model that there will not be any traffic congestion on Highway 24. In fact, the situation will be much worse if Highway 24 is

backed up, which is likely. Elite addresses on page 9 of their memo TJKM's response that Highway 24 traffic does not matter – it does!

7. On page 10 of their memo, Elite also responds to TJKM's claims that the on-ramps to Highway 24 will have the capacity to handle the extra evacuation traffic that will be generated by the Terraces – that is not true.

In summary, it is clear from Elite's comprehensive report that the TJKM evacuation model actually shows that **the Terraces will impose significant safety threats on both the surrounding neighborhood as well as the residents within the project itself** due to the traffic congestion and emergency evacuation delays. You should therefore deny this project at your meeting this evening.

Sincerely,

Colin Elliott on behalf of Michael Griffiths

Attached:

1. Elite Peer Review memo dated 8/23/2020



# Memorandum

**Date:** August 23, 2020

**To:** Michael Griffiths

**From:** Lin Zhang, PhD, PE, TE, PTOE  
Elite Transportation Group, Inc. (ETG)

**Subject:** **Peer Review of TJKM's Evacuation Models and Response Memo for Terraces of Lafayette Traffic Impact Study**

TJKM, the traffic study consultant for the proposed Terraces of Lafayette Project, released a memorandum dated August 10, 2020, in response to ETG's comments regarding TJKM's emergency evacuation modeling and analysis. The purpose of this memorandum is to provide a summary of our latest findings based on a review of the TJKM's response memo and evacuation models.

TJKM's evacuation models were developed for AM and PM peak hours using Synchro/SimTraffic, a commonly used software package for arterial operations. TJKM's evacuation model files were organized for the following six scenarios ("Project" is referred as the Terraces of Lafayette):

- **Evac 1** – Evacuation (without project) in the AM Peak
- **Evac 1 + Project** – Evacuation plus project, with trap lane<sup>1</sup>, in the AM Peak
- **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak
- **Evac 2** – Evacuation (without project) in the PM Peak
- **Evac 2 + Project** – Evacuation plus project, with trap lane, in the PM Peak
- **Evac 2 + Project Variant** – Evacuation plus project, no trap lane, in the PM Peak

In TJKM's memo, "denied entry vehicles", which will be explained in the next, were not reported. We reran SimTraffic simulation for the AM peak scenarios using the Synchro files and the same parameters that TJKM provided, as listed below:

- 5 runs per synchro file
- 10-minute seeding interval
- 60-minute analysis interval
- Random seed 1412

The SimTraffic simulation reports are attached in **Appendix**. We were able to replicate majority of the performance measures that were included in TJKM's memo. In addition, we also reported "denied entry vehicles", for both systemwide and individual intersections (see **Appendix**).

---

<sup>1</sup> The Gateway Constraints Policy outlined in the Lamorinda Action Plan precludes adding more through lanes. Pleasant Hill Road is used as an alternative route by traffic heading south on I-680 in the AM Peak period. One of the rationales for the Gateway Constraints Policy is the recognition that any improvement in through traffic flow on Pleasant Hill Road is likely to attract more traffic from I-680.



## DENIED ENTRY VEHICLES (WAITING TO ENTER THE TRAFFIC NETWORK)

**Denied entry vehicles** (i.e., unserved vehicles) are the vehicles that are still waiting to enter the traffic network by the end of the traffic analysis period. We checked and found many denied entry vehicles in TJKM's evaluation models. For instance, in the AM peak hour evacuation model (7:00-8:00 AM), the number of denied entry vehicles including the Terraces of Lafayette project is **more than 3,400 vehicles** under the trap lane scenario (**Table 1**), or **more than 3,800 vehicles** under the no trap lane scenario (**Table 2**). This means that by 8:00 AM (the end of the traffic analysis period), there would still be more than 3,400 vehicles (under the trap lane scenario), or more than 3,800 vehicles (under the no trap lane scenario), waiting to get onto streets for evacuation.

**Table 1. Systemwide Denied Entry Vehicles – AM Peak, with Project, with Trap Lane**

Interval #1 Information Recording						
Start Time	7:00					
End Time	8:00					
Total Time (min)	60					
Volumes adjusted by PHF.						
Run Number	1	2	3	4	5	Avg
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

**Table 2. Systemwide Denied Entry Vehicles – AM Peak, with Project, No Trap Lane (Project Variant)**

Interval #1 Information Recording						
Start Time	7:00					
End Time	8:00					
Total Time (min)	60					
Volumes adjusted by PHF.						
Run Number	1	2	3	4	5	Avg
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6





We checked the project driveway connecting with Pleasant Hill Road, and saw that the project driveway is still packed with vehicles by the end of the traffic analysis period (see **Figure 1**). We then checked and found that there were more than 500 denied entry vehicles under the trap lane scenario (**Table 3**), or more than 700 denied entry vehicles under the no trap lane scenario (**Table 4**). Only 12 vehicles, or 2%, would be able to get out of the Terraces of Lafayette community during the 7:00-8:00 AM one-hour evacuation period under the no trap lane scenario. Even with the trap lane scenario, only 217 vehicles, or 30%, would be able to get out of the Terraces of Lafayette community. The denied entry vehicles would not show up on the short project driveway. To better visualize the stack of the denied entry vehicles, we “artificially” extended the project driveway, as shown in **Figure 1**. Majority of vehicles could not even leave Terraces of Lafayette community after the one-hour evacuation period.

**Table 3. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, with Trap Lane**

**11: Pleasant Hill Road & Project Dwy Performance by movement**


Movement	EBR	NBT	SBT	All
Denied Delay (hr)	294.0	0.0	0.0	294.0
Denied Del/Veh (s)	1369.0	0.0	0.0	446.0
Total Delay (hr)	7.0	0.0	13.7	20.7
Total Del/Veh (s)	112.7	0.0	31.4	40.6
Stop Delay (hr)	7.5	0.0	11.1	18.6
Stop Del/Veh (s)	120.4	0.0	25.4	36.5
Vehicles Entered	217	39	1561	1817
Vehicles Exited	217	39	1558	1814
Hourly Exit Rate	217	39	1558	1814
Input Volume	735	35	4244	5014
% of Volume	30	111	37	36
Denied Entry Before	31	0	0	31
Denied Entry After	556	0	0	556

**Table 4. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, No Trap Lane (Project Variant)**

**11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	420.6	0.0	0.0	420.6
Denied Del/Veh (s)	1907.0	0.0	0.0	688.9
Total Delay (hr)	7.9	0.0	8.2	16.2
Total Del/Veh (s)	1361.7	0.0	21.5	40.6
Stop Delay (hr)	8.0	0.0	4.7	12.6
Stop Del/Veh (s)	1366.8	0.0	12.2	31.7
Vehicles Entered	13	39	1365	1417
Vehicles Exited	12	39	1365	1416
Hourly Exit Rate	12	39	1365	1416
Input Volume	735	35	4244	5014
% of Volume	2	111	32	28
Denied Entry Before	61	0	0	61
Denied Entry After	781	0	0	781

Figure 1. Pleasant Hill Road & Project Driveway (by end of traffic analysis period in AM peak)

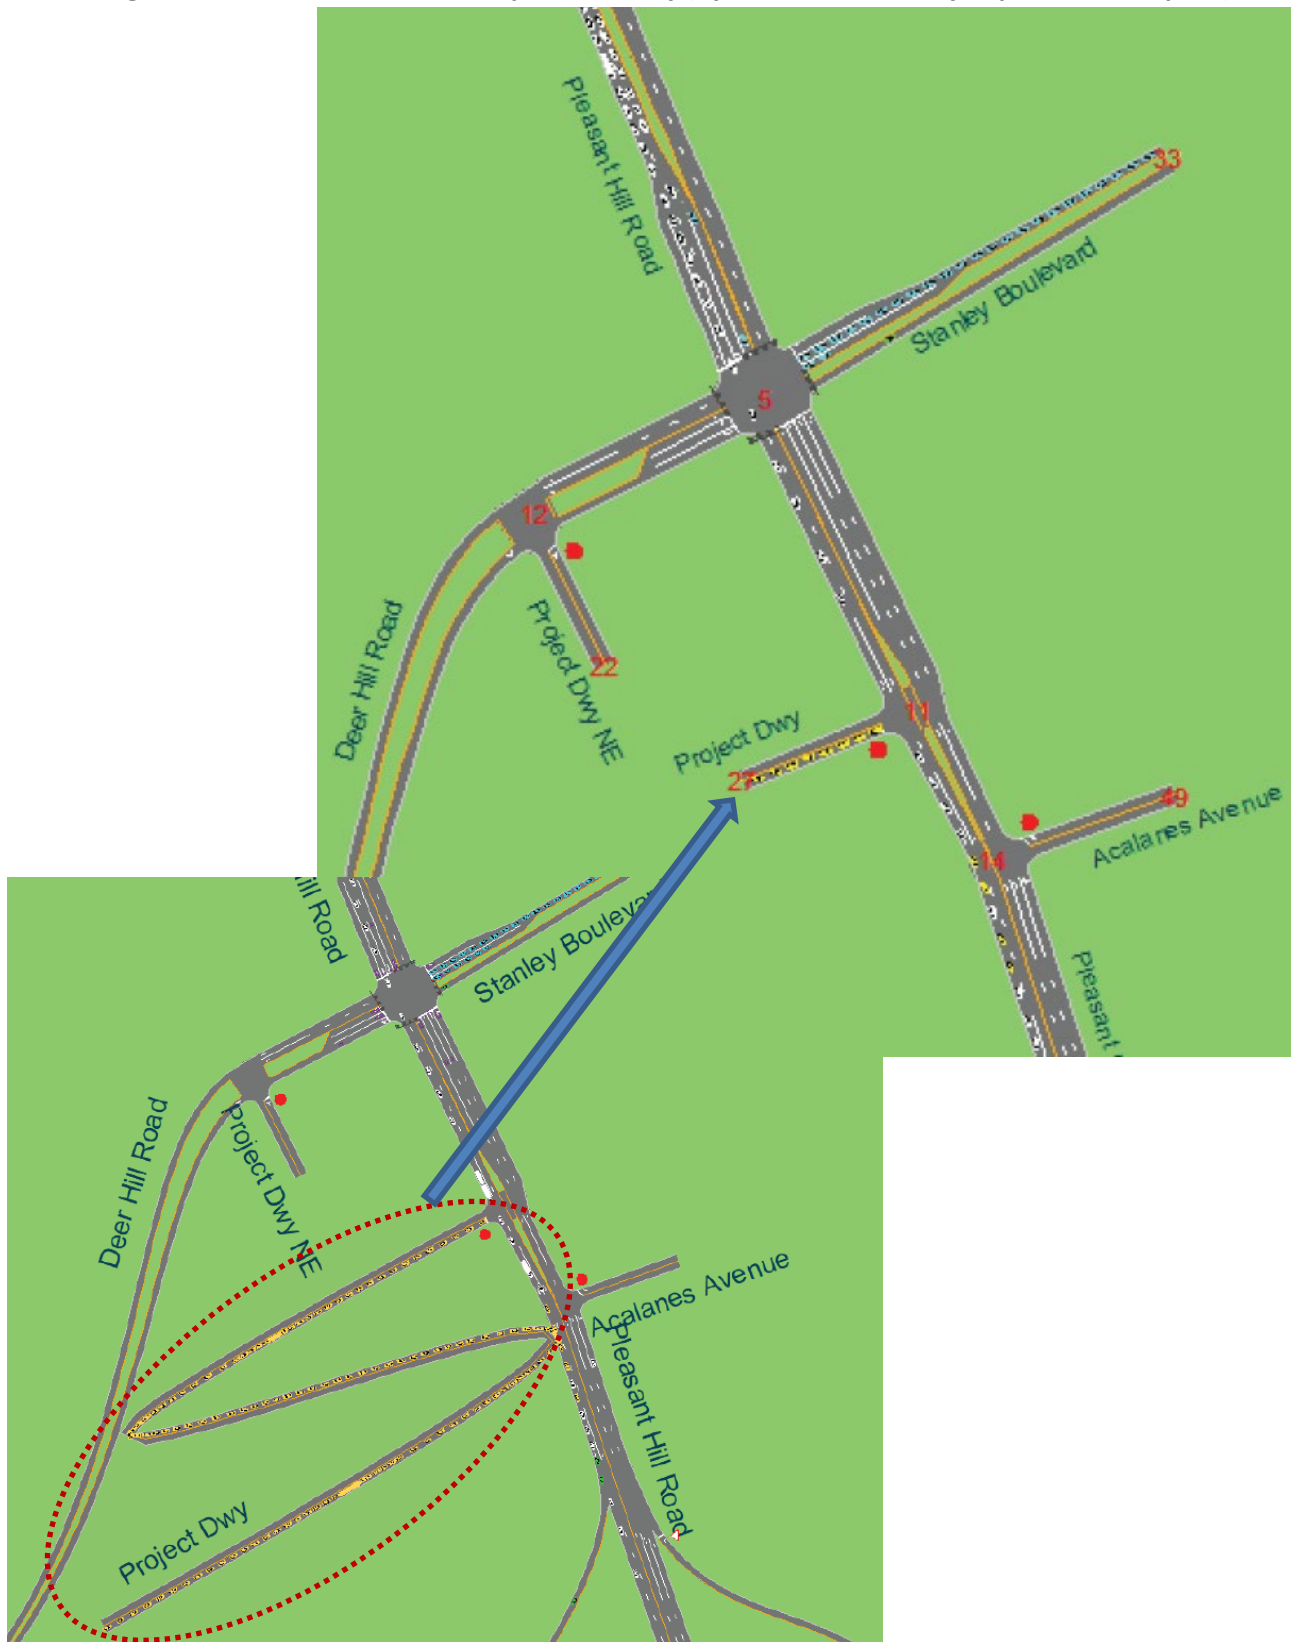





We noticed that TJKM assumed a peak hour factor (PHF) of 0.75 in the evacuation models. The PHF is usually used to convert the hourly traffic volume into the flow rate that represents the busiest 15 minutes of the rush hour.

$$PHF = \frac{\text{Total Hourly Traffic Volume}}{(\text{Peak 15-Minute Traffic Volume with the Hour}) \times 4}$$

Using a PHF of 0.75 means that the analysis flow rate (i.e., peak 15-minute traffic flow rate) is 33.3% more than the hourly traffic volume.

Different from a typical intersection delay and level of service (LOS) analysis, the purpose of an evacuation model is mainly focused on how quickly the evacuation can be achieved. Therefore, using PHFs may not be appropriate for evacuation analyses. We then ran SimTraffic simulation for the AM peak scenarios using the same Synchro files and primary parameters, with the only change of PHF from 0.75 to 1.0. The SimTraffic simulation reports based on PHF of 1.0 are attached in **Appendix**.

Even with a PHF of 1.0, we still found that there would be more than 300 denied entry vehicles under the trap lane scenario (**Table 5**), or more than 500 denied entry vehicles under the no trap lane scenario (**Table 6**). Only 13 vehicles, or 2%, would be able to get out of the Terraces of Lafayette community during the 7:00-8:00 AM one-hour evacuation period under the no trap lane scenario. Even with the trap lane scenario, only 210 vehicles, or 38%, would be able to get out of the Terraces of Lafayette community.

**Table 5. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, with Trap Lane (PHF=1.0)**

**11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	205.8	0.0	0.0	205.8
Denied Del/Veh (s)	1266.7	0.0	0.0	341.3
Total Delay (hr)	7.0	0.0	14.4	21.3
Total Del/Veh (s)	115.4	0.0	32.9	42.3
Stop Delay (hr)	7.4	0.0	11.8	19.2
Stop Del/Veh (s)	123.2	0.0	27.0	38.1
Vehicles Entered	211	26	1560	1797
Vehicles Exited	210	26	1556	1792
Hourly Exit Rate	210	26	1556	1792
Input Volume	551	26	3183	3760
% of Volume	38	100	49	48
Denied Entry Before	31	0	0	31
Denied Entry After	374	0	0	374



**Table 6. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, No Trap Lane (Project Variant) (PHF=1.0)**


**11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	333.1	0.0	0.0	333.1
Denied Del/Veh (s)	1956.2	0.0	0.0	598.1
Total Delay (hr)	8.0	0.0	8.0	16.1
Total Del/Veh (s)	1374.8	0.0	21.0	40.7
Stop Delay (hr)	8.1	0.0	4.5	12.5
Stop Del/Veh (s)	1380.2	0.0	11.7	31.7
Vehicles Entered	13	25	1367	1405
Vehicles Exited	13	25	1368	1406
Hourly Exit Rate	13	25	1368	1406
Input Volume	551	26	3183	3760
% of Volume	2	96	43	37
Denied Entry Before	65	0	0	65
Denied Entry After	600	0	0	600

The denied entry vehicles exist on other streets too, including Stanley Boulevard, Spring Hill Road, Quandt Road, and Reliez Valley Road, as shown in **Figure 2**. Keep it in mind that Stanley Boulevard is mainly for evacuating students from Acalanes High School, and denied entry vehicles (i.e., waiting to enter the traffic network) would be more than 900.

With so many denied entry vehicles systemwide (>3,400 vehicles under the trap lane scenario, or >3,800 vehicles under the no trap lane scenario), and 98% of vehicles under the no trap lane scenario (or more than 60% under the trap lane scenario) could not even leave Terraces of Lafayette community after the one-hour evacuation period, TJKM's evacuation models apparently lack credibility and the results coming out of the evacuation models are simply invalid.


Figure 2. Streets with Significant Denied Entry Vehicles (by end of traffic analysis period in AM peak)

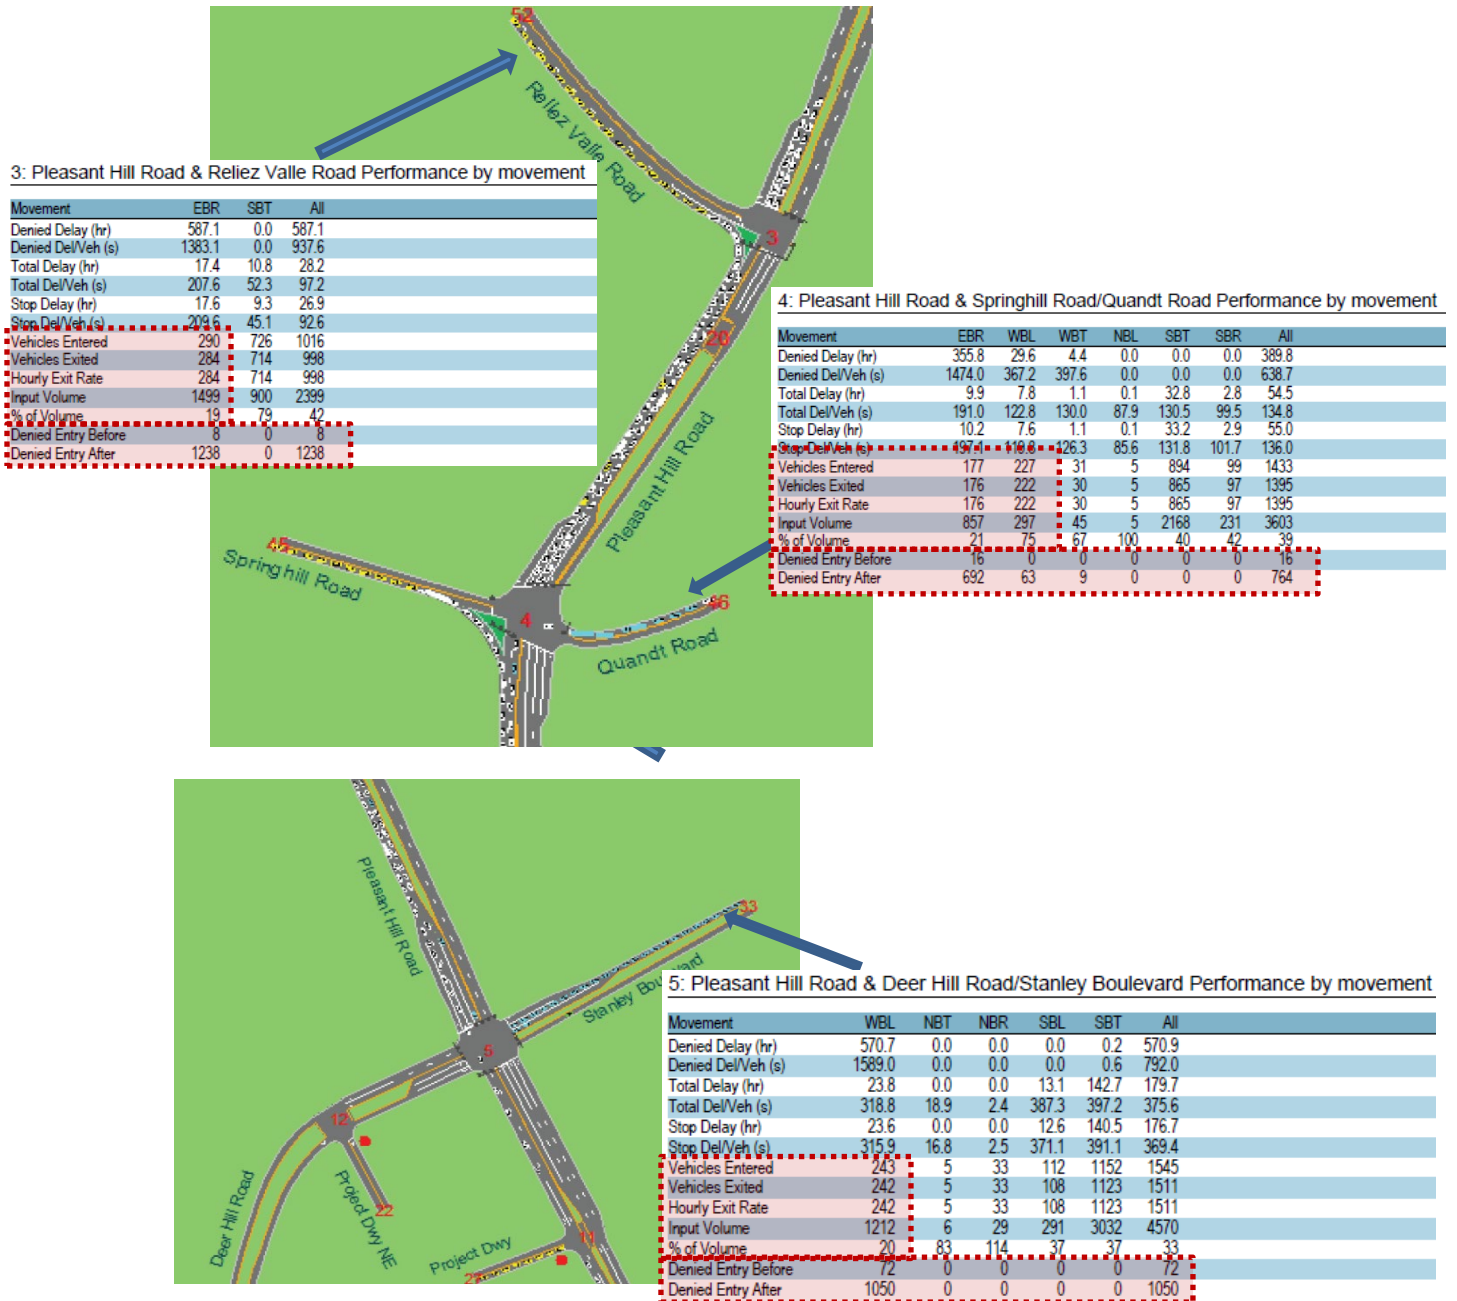

## BACKGROUND TRAFFIC

In their response memo, TJKM mentioned that they included a 10-minute “seeding” period (i.e., 6:50-7:00 AM). We ran the 10-minute seeding period, and found that traffic was only backed up to somewhere between Deer Hill Road/Stanley Boulevard and Spring Hill Road/Quant Road, as shown in **Figure 3**.

**Figure 3. Traffic Condition (by end of 10-minute seeding period in AM peak)**

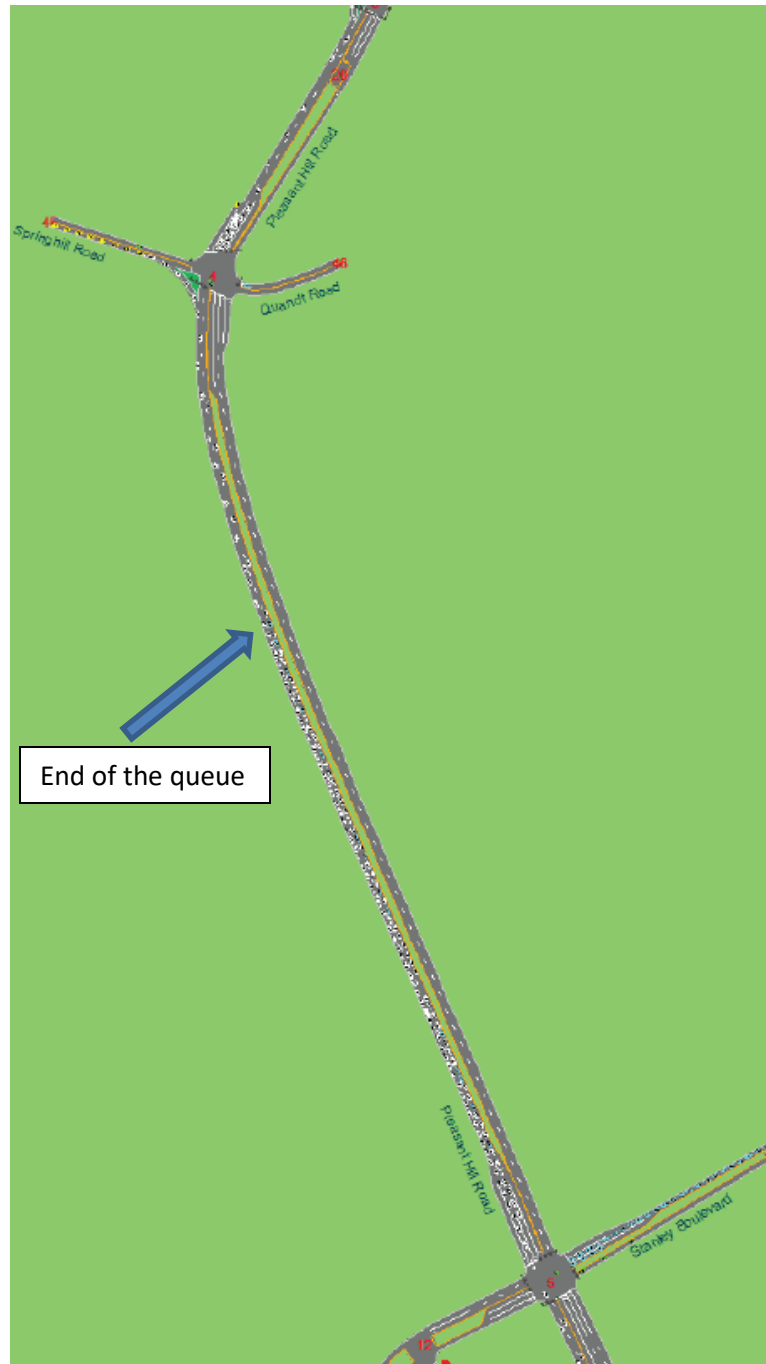



However, it is well known that the Pleasant Hill Road backs up much further upstream at 7:00 AM during the morning peak. There should have been many more vehicles (i.e., “background traffic”) already in the roadway system when the evacuation starts during the AM peak hour.

In their response memo, TJKM claimed that “By including both evacuation traffic and normal commute traffic, these vehicles would be double counted.” This would only be true if all of the traffic on Pleasant Hill Road would come only from Lafayette. However, Pleasant Hill Road carries traffic from many surrounding cities and communities. The right approach is to load the roadway network so that at the beginning of the evacuation (i.e., 7:00 AM during the morning peak), the modeled traffic condition represents what would look like during a normal day without evacuation. After that, no new non-evacuation traffic would enter Pleasant Hill Road from the north once a roadblock has been set up after the evacuation order is given. However, TJKM’s evacuation models did not follow the right approach, and therefore significantly underestimated background traffic. Adding background traffic could make traffic delay exponentially worse.

## SR 24 CAPACITY CONSTRAINT

The evacuation models assumed that all evacuating vehicles would use SR 24 to leave Lafayette – 50% would travel eastbound (EB) and 50% would travel westbound (WB). We raised the question that the evacuation models ended at the on-ramps (both EB and WB) and did not model or put capacity constraints on SR 24 mainline freeway, as illustrated in **Figure 4**. By doing this, TJKM assumed that SR 24 would have “unlimited” capacity to absorb the additional evacuating traffic. This assumption is unrealistic since SR 24 is already congested (WB in AM and EB in PM) and does not have enough extra capacity to accommodate the significant amount increase of traffic due to evacuation.

In their response memo, TJKM did not address this concern directly. It is only simply stated that “the evacuation traffic volumes are already extremely conservative.”

Here is a simple example for the AM peak hour to illustrate the importance of SR 24 capacity constraint. Again, this example is for illustration purposes and it does not replace detailed and accurate modeling.

- Same assumption of all evacuating vehicles would use SR 24 to leave Lafayette – 50% would travel EB and 50% would travel WB.
- In the AM peak hour (7:00-8:00 AM), SR 24 WB has a capacity constraint – assuming 900 vehicles are able to get on and use SR 24 in the WB direction.
- Traffic demand during the evacuation is 1,800 vehicles to use the SR 24 WB on-ramp.
- With the above assumptions, vehicles cannot be fully evacuated in two hours (i.e.,  $1,800/900 = 2$ ). In other words, **one additional hour** is needed after the one-hour peak period. However, with all the above assumptions except for the SR 24 capacity constraint, as modelled by TJKM, vehicles can be fully evacuated within the one-hour peak period.
- Additional evacuating traffic coming out of the Terraces of Lafayette community is 551 vehicles (based on TJKM’s memo dated June 22, 2020). Now adding half of them to the SR 24 WB direction,



the additional 275 vehicles (i.e.,  $551/2 = 275$ ) coming out of the Terraces of Lafayette community would cause additional 18 minutes (i.e.,  $275/900 \times 60 = 18$ ) to evacuate.

Therefore, the evacuation models must have significantly underestimated the level of traffic congestion, and the impacts of which is that traffic is unable to get onto the SR 24 freeway and gets backed up on surface streets.

**Figure 4. Evacuation Models Ended at On-Ramps**



## ON-RAMP CAPACITY CONSTRAINT

We stated in our previous memo that the single-lane on-ramps (both EB and WB) may not be able to handle the significant amount of traffic getting onto SR 24 freeway during the peak hours, with a maximum capacity of 1,900 vehicles per hour per lane at on-ramps assuming no congestion on the freeway onto which the traffic merges. TJKM responded by stating that “it is not an absolute limit, and exceeding 1,900 vehicles per hour per lane does not immediately result in gridlock or excessive delays. In addition, the sections of SR-24 where the westbound and eastbound ramps enter the freeway feature long auxiliary lanes, such that evacuation traffic would have ample time to merge into the other travel lanes without slowing down ramp traffic.”

- On-Ramp Capacity:** TJKM stated that on-ramp maximum capacity of 1,900 vehicles per hour per lane “it is not an absolute limit”. Traffic Engineers generally use 1,900 vehicles under the close to “ideal” condition without traffic congestion or traffic flow breakdown. 1,900 vehicles per hour per lane corresponds to 1.9 seconds in headway (i.e.,  $3,600 \text{ seconds}/1,900 = 1.9$ ). Headway is a



measure of the temporal space between two vehicles. Specifically, the headway is the time that elapses between the arrival of the leading vehicle and the following vehicle at the designated test point. In fact, on-ramp capacity drops when traffic is congested (traffic flow breakdown), causing “productivity loss”. It is not uncommon to see on-ramp capacity drops to 1,200 vehicles per hour per lane or less when traffic follow breaks down. Under the emergency evacuation condition, traffic typically breaks down due to many factors such as poor visibility (due to smoke), rubbernecking, panicking, etc. We agree that the on-ramp capacity is not an absolute limit; instead, it drops significantly under the emergency evacuation condition. In this perspective, traffic congestion would be even much worse.

- **Auxiliary Lanes:** TJKM stated that “the sections of SR-24 where the westbound and eastbound ramps enter the freeway feature long auxiliary lanes, such that evacuation traffic would have ample time to merge into the other travel lanes without slowing down ramp traffic.” Auxiliary lanes on SR 24 do not help when traffic is already congested (WB in AM and EB in PM) while much more additional traffic is being loaded onto SR 24 due to emergency evacuation.

## CONCLUSION

In conclusion, the evacuation models that TJKM developed has critical fatal flaws. The results generated from the evacuation models are invalid and should not be used for any decision-making.



---

## APPENDIX

### SimTraffic Simulation Reports

- PHF = 0.75 (TJKM's assumption)
  - **Evac 1** – Evacuation (without project) in the AM Peak
  - **Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM Peak
  - **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak
- PHF = 1.0
  - **Evac 1** – Evacuation without project in the AM Peak
  - **Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM Peak
  - **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak



PHF = 0.75 (TJKM's assumption)

**Evac 1** – Evacuation (without project) in the AM Peak

## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1839	1799	1853	1780	1801	1815
Vehs Exited	1731	1727	1714	1677	1712	1712
Starting Vehs	281	306	248	270	292	279
Ending Vehs	389	378	387	373	381	380
Denied Entry Before	111	134	82	89	97	102
Denied Entry After	3211	3348	3053	3274	3192	3215
Travel Distance (mi)	1650	1646	1657	1635	1633	1644
Travel Time (hr)	1970.3	2079.1	1891.0	2004.2	1963.6	1981.7
Total Delay (hr)	1913.1	2022.1	1833.3	1947.6	1906.9	1924.6
Total Stops	6129	6226	6137	6034	6042	6113
Fuel Used (gal)	490.2	515.2	471.8	497.7	486.6	492.3

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10

No data recorded this interval.

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60

Volumes adjusted by PHF.

Run Number	1	2	3	4	5	Avg
Vehs Entered	1839	1799	1853	1780	1801	1815
Vehs Exited	1731	1727	1714	1677	1712	1712
Starting Vehs	281	306	248	270	292	279
Ending Vehs	389	378	387	373	381	380
Denied Entry Before	111	134	82	89	97	102
Denied Entry After	3211	3348	3053	3274	3192	3215
Travel Distance (mi)	1650	1646	1657	1635	1633	1644
Travel Time (hr)	1970.3	2079.1	1891.0	2004.2	1963.6	1981.7
Total Delay (hr)	1913.1	2022.1	1833.3	1947.6	1906.9	1924.6
Total Stops	6129	6226	6137	6034	6042	6113
Fuel Used (gal)	490.2	515.2	471.8	497.7	486.6	492.3

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.2
Total Del/Veh (s)	3.6	6.3	4.1
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	2.8	4.5	3.1
Vehicles Entered	176	36	212
Vehicles Exited	175	36	211
Hourly Exit Rate	175	36	211
Input Volume	173	33	206
% of Volume	101	109	102
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	19.7	0.3	20.1
Total Del/Veh (s)	3.4	144.5	5.2	95.1
Stop Delay (hr)	0.1	18.6	0.2	18.9
Stop Del/Veh (s)	3.5	136.2	3.4	89.3
Vehicles Entered	56	479	212	747
Vehicles Exited	55	467	212	734
Hourly Exit Rate	55	467	212	734
Input Volume	56	637	207	900
% of Volume	98	73	102	82
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	571.5	0.0	571.5
Denied Del/Veh (s)	1365.2	0.0	918.1
Total Delay (hr)	17.5	8.3	25.7
Total Del/Veh (s)	199.0	39.8	87.2
Stop Delay (hr)	17.5	6.7	24.3
Stop Del/Veh (s)	199.8	32.4	82.2
Vehicles Entered	303	734	1037
Vehicles Exited	297	727	1024
Hourly Exit Rate	297	727	1024
Input Volume	1499	900	2399
% of Volume	20	81	43
Denied Entry Before	8	0	8
Denied Entry After	1204	0	1204

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	354.3	42.1	6.4	0.0	0.0	0.0	402.8
Denied Del/Veh (s)	1456.1	485.6	480.4	0.0	0.0	0.0	641.6
Total Delay (hr)	9.9	7.9	1.2	0.1	32.3	2.5	53.8
Total Del/Veh (s)	201.6	123.7	126.0	96.5	123.9	93.5	131.2
Stop Delay (hr)	10.2	7.7	1.1	0.1	32.5	2.6	54.2
Stop Del/Veh (s)	207.6	120.7	121.8	94.2	124.8	94.5	132.0
Vehicles Entered	167	228	33	5	922	97	1452
Vehicles Exited	166	223	32	5	897	94	1417
Hourly Exit Rate	166	223	32	5	897	94	1417
Input Volume	857	297	45	5	2168	231	3603
% of Volume	19	75	71	100	41	41	39
Denied Entry Before	11	1	0	0	0	0	12
Denied Entry After	709	84	15	0	0	0	808

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	573.7	0.0	0.0	0.0	0.0	573.7
Denied Del/Veh (s)	1606.0	0.0	0.0	0.0	0.0	792.8
Total Delay (hr)	23.6	0.0	0.0	13.0	140.8	177.4
Total Del/Veh (s)	320.2	17.2	2.9	373.8	389.2	369.9
Stop Delay (hr)	23.4	0.0	0.0	12.3	137.2	172.9
Stop Del/Veh (s)	317.5	15.6	2.9	353.2	379.4	360.7
Vehicles Entered	238	7	26	112	1174	1557
Vehicles Exited	241	7	26	113	1139	1526
Hourly Exit Rate	241	7	26	113	1139	1526
Input Volume	1212	6	29	291	3032	4570
% of Volume	20	117	90	39	38	33
Denied Entry Before	82	0	0	0	0	82
Denied Entry After	1048	0	0	0	0	1048

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	0.0	0.0
Total Del/Veh (s)	0.1	4.8	4.1
Stop Delay (hr)	0.0	0.0	0.0
Stop Del/Veh (s)	0.0	0.0	0.0
Vehicles Entered	2	11	13
Vehicles Exited	2	11	13
Hourly Exit Rate	2	11	13
Input Volume	7	28	35
% of Volume	29	39	37
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.8	1.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	28	28
Vehicles Exited	28	28
Hourly Exit Rate	28	28
Input Volume	29	29
% of Volume	97	97
Denied Entry Before	0	0
Denied Entry After	0	0

14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.5	4.5
Total Del/Veh (s)	0.3	11.8	11.6
Stop Delay (hr)	0.0	1.4	1.4
Stop Del/Veh (s)	0.0	3.7	3.6
Vehicles Entered	33	1377	1410
Vehicles Exited	33	1376	1409
Hourly Exit Rate	33	1376	1409
Input Volume	35	4244	4279
% of Volume	94	32	33
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.5
Total Del/Veh (s)	0.7	18.8	15.1	16.6
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.2	2.1
Vehicles Entered	33	697	679	1409
Vehicles Exited	33	695	681	1409
Hourly Exit Rate	33	695	681	1409
Input Volume	35	2140	2104	4279
% of Volume	94	32	32	33
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.7	6.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	695	695
Vehicles Exited	695	695
Hourly Exit Rate	695	695
Input Volume	2140	2140
% of Volume	32	32
Denied Entry Before	0	0
Denied Entry After	0	0

### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.1	0.1
Total Delay (hr)	0.0	1.3	1.3
Total Del/Veh (s)	7.3	6.3	6.3
Stop Delay (hr)	0.0	0.6	0.6
Stop Del/Veh (s)	1.7	3.2	3.1
Vehicles Entered	13	716	729
Vehicles Exited	13	716	729
Hourly Exit Rate	13	716	729
Input Volume	35	2140	2175
% of Volume	37	33	34
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### Total Network Performance

Denied Delay (hr)	1613.5
Denied Del/Veh (s)	1154.8
Total Delay (hr)	311.1
Total Del/Veh (s)	535.4
Stop Delay (hr)	289.0
Stop Del/Veh (s)	497.3
Vehicles Entered	1815
Vehicles Exited	1712
Hourly Exit Rate	1712
Input Volume	37038
% of Volume	5
Denied Entry Before	102
Denied Entry After	3215



Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.3	20.2	0.1	11
	11	0.0	4.0	0.0	34
Stanley Boulevard	5	17.2	24.2	0.1	12
Quandt Road	4	96.5	141.4	0.4	11
Total		113.9	189.8	0.6	12

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	6.3	21.5	0.2	26
	19	1.3	16.3	0.1	33
Greenvalley Drive	2	5.2	12.0	0.1	21
Reliez Valle Road	3	39.1	63.3	0.3	14
	20	24.2	27.8	0.0	4
Springhill Road	4	123.9	133.4	0.1	3
Deer Hill Road	5	359.4	398.0	0.4	4
	11	19.5	28.0	0.1	10
Acalanes Avenue	14	11.8	15.8	0.0	9
	15	18.8	25.0	0.1	9
	16	6.7	16.1	0.1	24
	17	7.3	16.4	0.1	16
Mt. Diablo Boulevard	6	4.8	12.9	0.1	19
SR 24 EB Off Ramp	7	1.8	4.6	0.1	48
Total		630.0	791.1	1.7	8

# Queuing and Blocking Report

## Evacuation Scenario 1

08/23/2020

### Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	91	48	11
Average Queue (ft)	42	11	1
95th Queue (ft)	73	37	8
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

### Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	56	611	112	55	75
Average Queue (ft)	14	562	73	12	31
95th Queue (ft)	35	664	112	37	63
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		82	84		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		76			
Queuing Penalty (veh)		0			

### Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	467	486	360	366
Average Queue (ft)	283	457	200	198
95th Queue (ft)	631	473	292	304
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	33	96		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				34
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	370	255	20	523	520	96	217	222
Average Queue (ft)	338	231	3	470	470	76	169	181
95th Queue (ft)	355	246	15	612	625	140	262	266
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	89		86	88		28	86
Queuing Penalty (veh)	0	0		1036	1053		331	1036
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				87	81	0		
Queuing Penalty (veh)				0	188	3		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	554	32	47	275	2267	2401
Average Queue (ft)	194	524	3	11	183	2238	2366
95th Queue (ft)	304	543	17	34	335	2325	2480
Link Distance (ft)		504	347	347		2220	2220
Upstream Blk Time (%)		95				40	94
Queuing Penalty (veh)		0				672	1556
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	9	97			6	28	66
Queuing Penalty (veh)	52	587			88	81	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	3
Average Queue (ft)	0
95th Queue (ft)	2
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement SB SB B11 B11

Directions Served T T T T

Maximum Queue (ft) 190 254 400 387

Average Queue (ft) 45 206 186 334

95th Queue (ft) 142 305 430 436

Link Distance (ft) 147 147 347 347

Upstream Blk Time (%) 1 20 1 7

Queuing Penalty (veh) 17 428 25 146

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 15: Pleasant Hill Road

Movement SB

Directions Served TR

Maximum Queue (ft) 361

Average Queue (ft) 183

95th Queue (ft) 427

Link Distance (ft) 266

Upstream Blk Time (%) 6

Queuing Penalty (veh) 117

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement	SB
Directions Served	TR
Maximum Queue (ft)	217
Average Queue (ft)	80
95th Queue (ft)	174
Link Distance (ft)	314
Upstream Blk Time (%)	0
Queuing Penalty (veh)	0
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Network Summary

---

Network wide Queuing Penalty: 7415

---

PHF = 0.75 (TJKM's assumption)

**Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM  
Peak



### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10

No data recorded this interval.

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60

Volumes adjusted by PHF.

Run Number	1	2	3	4	5	Avg
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.2
Total Del/Veh (s)	3.8	5.4	4.1
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	2.9	3.8	3.0
Vehicles Entered	177	34	211
Vehicles Exited	176	33	209
Hourly Exit Rate	176	33	209
Input Volume	173	33	206
% of Volume	102	100	101
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	20.1	0.3	20.5
Total Del/Veh (s)	3.9	148.6	5.7	97.7
Stop Delay (hr)	0.1	19.1	0.2	19.4
Stop Del/Veh (s)	4.1	140.8	3.9	92.2
Vehicles Entered	59	475	209	743
Vehicles Exited	59	464	209	732
Hourly Exit Rate	59	464	209	732
Input Volume	56	637	207	900
% of Volume	105	73	101	81
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	400.7	0.0	400.7
Denied Del/Veh (s)	962.4	0.0	646.6
Total Delay (hr)	15.4	6.5	21.8
Total Del/Veh (s)	88.9	31.0	57.3
Stop Delay (hr)	13.7	5.1	18.8
Stop Del/Veh (s)	79.2	24.6	49.4
Vehicles Entered	609	732	1341
Vehicles Exited	606	725	1331
Hourly Exit Rate	606	725	1331
Input Volume	1499	900	2399
% of Volume	40	81	55
Denied Entry Before	7	0	7
Denied Entry After	890	0	890

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	381.4	20.4	3.7	0.0	0.0	0.0	405.4
Denied Del/Veh (s)	1544.3	254.1	269.8	0.0	0.0	0.0	570.4
Total Delay (hr)	9.2	7.5	1.4	0.1	21.9	2.0	42.0
Total Del/Veh (s)	224.5	108.8	117.4	81.8	65.0	53.8	84.7
Stop Delay (hr)	9.4	7.2	1.3	0.1	19.4	1.8	39.3
Stop Del/Veh (s)	229.7	104.7	112.5	81.0	57.8	50.3	79.3
Vehicles Entered	138	247	42	5	1198	129	1759
Vehicles Exited	137	244	41	5	1175	128	1730
Hourly Exit Rate	137	244	41	5	1175	128	1730
Input Volume	857	297	45	5	2168	231	3603
% of Volume	16	82	91	100	54	55	48
Denied Entry Before	40	0	0	0	0	0	40
Denied Entry After	751	42	7	0	0	0	800

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	564.4	0.0	0.0	0.0	0.0	564.4
Denied Del/Veh (s)	1578.8	0.0	0.0	0.0	0.0	725.7
Total Delay (hr)	21.7	0.0	0.0	3.5	24.7	50.0
Total Del/Veh (s)	326.5	12.8	3.7	97.3	64.6	100.7
Stop Delay (hr)	21.5	0.0	0.0	3.3	21.4	46.2
Stop Del/Veh (s)	323.2	11.6	3.9	91.1	55.9	93.1
Vehicles Entered	214	7	32	128	1346	1727
Vehicles Exited	215	7	32	128	1346	1728
Hourly Exit Rate	215	7	32	128	1346	1728
Input Volume	1212	6	29	291	3032	4570
% of Volume	18	117	110	44	44	38
Denied Entry Before	72	0	0	0	0	72
Denied Entry After	1073	0	0	0	0	1073

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	6.2	6.2
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	8	8
Vehicles Exited	8	8
Hourly Exit Rate	8	8
Input Volume	35	35
% of Volume	23	23
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.9	1.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	34	34
Vehicles Exited	34	34
Hourly Exit Rate	34	34
Input Volume	35	35
% of Volume	97	97
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	294.0	0.0	0.0	294.0
Denied Del/Veh (s)	1369.0	0.0	0.0	446.0
Total Delay (hr)	7.0	0.0	13.7	20.7
Total Del/Veh (s)	112.7	0.0	31.4	40.6
Stop Delay (hr)	7.5	0.0	11.1	18.6
Stop Del/Veh (s)	120.4	0.0	25.4	36.5
Vehicles Entered	217	39	1561	1817
Vehicles Exited	217	39	1558	1814
Hourly Exit Rate	217	39	1558	1814
Input Volume	735	35	4244	5014
% of Volume	30	111	37	36
Denied Entry Before	31	0	0	31
Denied Entry After	556	0	0	556

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	8.4	8.4
Total Del/Veh (s)	0.3	16.9	16.6
Stop Delay (hr)	0.0	8.1	8.1
Stop Del/Veh (s)	0.0	16.4	16.1
Vehicles Entered	39	1775	1814
Vehicles Exited	39	1768	1807
Hourly Exit Rate	39	1768	1807
Input Volume	35	4979	5014
% of Volume	111	36	36
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.4	1.6	12.0
Total Del/Veh (s)	0.7	41.4	6.8	23.9
Stop Delay (hr)	0.0	11.6	0.2	11.9
Stop Del/Veh (s)	0.0	46.5	0.9	23.6
Vehicles Entered	39	898	869	1806
Vehicles Exited	39	890	869	1798
Hourly Exit Rate	39	890	869	1798
Input Volume	35	2507	2472	5014
% of Volume	111	36	35	36
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	16.4	16.4
Total Del/Veh (s)	65.5	65.6
Stop Delay (hr)	18.7	18.7
Stop Del/Veh (s)	74.5	74.5
Vehicles Entered	890	890
Vehicles Exited	884	884
Hourly Exit Rate	884	884
Input Volume	2507	2507
% of Volume	35	35
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.2	19.5	19.7
Denied Del/Veh (s)	93.6	76.9	77.0
Total Delay (hr)	0.1	14.9	15.1
Total Del/Veh (s)	64.0	60.2	60.2
Stop Delay (hr)	0.2	17.4	17.6
Stop Del/Veh (s)	70.0	70.2	70.2
Vehicles Entered	8	876	884
Vehicles Exited	8	875	883
Hourly Exit Rate	8	875	883
Input Volume	35	2507	2542
% of Volume	23	35	35
Denied Entry Before	0	2	2
Denied Entry After	0	37	37



---

Total Network Performance

---

Denied Delay (hr)	1758.9
Denied Del/Veh (s)	1090.0
Total Delay (hr)	312.7
Total Del/Veh (s)	443.8
Stop Delay (hr)	287.8
Stop Del/Veh (s)	408.4
Vehicles Entered	2288
Vehicles Exited	2124
Hourly Exit Rate	2124
Input Volume	44058
% of Volume	5
Denied Entry Before	154
Denied Entry After	3521

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.3	20.3	0.1	11
Project Dwy	11	0.0	4.1	0.0	33
Stanley Boulevard	5	12.8	19.5	0.1	15
	37	1.7	9.9	0.1	30
Quandt Road	4	81.8	118.9	0.4	11
Total		96.5	172.8	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.4	20.8	0.2	26
	19	1.1	15.6	0.1	34
Greenvalley Drive	2	5.7	12.5	0.1	21
Reliez Valle Road	3	28.0	51.8	0.3	17
	20	14.3	18.0	0.0	7
Springhill Road	4	65.0	74.5	0.1	5
	37	198.8	234.1	0.4	6
Deer Hill Road	5	64.6	72.6	0.1	4
Project Dwy	11	31.6	40.1	0.1	7
Acalanes Avenue	14	17.6	21.7	0.0	6
	15	41.4	47.5	0.1	5
	16	65.5	74.9	0.1	5
	17	64.0	166.8	0.1	3
Mt. Diablo Boulevard	6	6.2	14.2	0.1	17
SR 24 EB Off Ramp	7	1.9	4.7	0.1	48
Total		611.1	869.5	1.7	8

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	83	37	16
Average Queue (ft)	43	9	1
95th Queue (ft)	72	31	9
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	60	607	112	64	71
Average Queue (ft)	15	567	73	15	32
95th Queue (ft)	39	637	109	45	64
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		85	87		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		77		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	454	488	332	355
Average Queue (ft)	271	459	183	195
95th Queue (ft)	627	478	280	308
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	18	83		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				30
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	365	272	24	512	519	96	208	214
Average Queue (ft)	337	235	3	379	380	71	103	125
95th Queue (ft)	354	256	15	625	640	139	241	277
Link Distance (ft)	318	217		406	406		127	127
Upstream Blk Time (%)	100	82		42	52		13	46
Queuing Penalty (veh)	0	0		502	621		153	551
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				56	58	0		
Queuing Penalty (veh)				0	133	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB	SB	B37	B37
Directions Served	L	LT	T	R	L	T	T	T	T	T
Maximum Queue (ft)	225	556	21	34	275	446	446	450	1878	2010
Average Queue (ft)	110	524	2	11	175	373	393	413	1622	1741
95th Queue (ft)	276	543	14	33	309	521	443	458	2450	2592
Link Distance (ft)		504	342	342		351	351	351	1832	1832
Upstream Blk Time (%)		96				26	36	40	20	76
Queuing Penalty (veh)		0				285	395	439	340	1267
Storage Bay Dist (ft)	185				175					
Storage Blk Time (%)	0	92			8	6		60		
Queuing Penalty (veh)	0	558			80	19		0		

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	7
Average Queue (ft)	0
95th Queue (ft)	6
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB	SB
Directions Served	R	T	T	TR
Maximum Queue (ft)	216	390	391	394
Average Queue (ft)	183	154	327	324
95th Queue (ft)	199	383	459	484
Link Distance (ft)	164	342	342	342
Upstream Blk Time (%)	100	2	14	11
Queuing Penalty (veh)	0	21	201	159
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	SB
Directions Served	T	T	T
Maximum Queue (ft)	166	267	238
Average Queue (ft)	34	230	174
95th Queue (ft)	110	305	277
Link Distance (ft)	152	152	152
Upstream Blk Time (%)	1	94	11
Queuing Penalty (veh)	10	1555	180
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 15: Pleasant Hill Road

Movement	SB	SB	SB
Directions Served	T	T	R
Maximum Queue (ft)	60	369	287
Average Queue (ft)	12	336	103
95th Queue (ft)	50	408	228
Link Distance (ft)	262	262	262
Upstream Blk Time (%)		96	0
Queuing Penalty (veh)		1586	5
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			



Intersection: 16: Pleasant Hill Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	540
Average Queue (ft)	512
95th Queue (ft)	545
Link Distance (ft)	302
Upstream Blk Time (%)	99
Queuing Penalty (veh)	1240
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 17: Pleasant Hill Road

Movement	SB	SB
Directions Served	T	TR
Maximum Queue (ft)	125	532
Average Queue (ft)	4	506
95th Queue (ft)	63	530
Link Distance (ft)	314	314
Upstream Blk Time (%)	0	99
Queuing Penalty (veh)	0	830
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Network Summary

Network wide Queuing Penalty: 11131
-------------------------------------

PHF = 0.75 (TJKM's assumption)

**Evac 1 + Project Variant**– Evacuation plus project, no trap lane, in the  
AM Peak

### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10

No data recorded this interval.

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60

Volumes adjusted by PHF.

Run Number	1	2	3	4	5	Avg
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6

1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.3
Total Del/Veh (s)	3.9	7.2	4.4
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	3.0	5.4	3.4
Vehicles Entered	173	31	204
Vehicles Exited	174	31	205
Hourly Exit Rate	174	31	205
Input Volume	173	33	206
% of Volume	101	94	100
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

2: Pleasant Hill Road & Greenvally Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	20.0	0.3	20.3
Total Del/Veh (s)	3.4	148.1	5.0	97.5
Stop Delay (hr)	0.1	18.9	0.2	19.2
Stop Del/Veh (s)	3.6	140.1	3.3	91.8
Vehicles Entered	60	476	205	741
Vehicles Exited	60	462	204	726
Hourly Exit Rate	60	462	204	726
Input Volume	56	637	207	900
% of Volume	107	73	99	81
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	587.1	0.0	587.1
Denied Del/Veh (s)	1383.1	0.0	937.6
Total Delay (hr)	17.4	10.8	28.2
Total Del/Veh (s)	207.6	52.3	97.2
Stop Delay (hr)	17.6	9.3	26.9
Stop Del/Veh (s)	209.6	45.1	92.6
Vehicles Entered	290	726	1016
Vehicles Exited	284	714	998
Hourly Exit Rate	284	714	998
Input Volume	1499	900	2399
% of Volume	19	79	42
Denied Entry Before	8	0	8
Denied Entry After	1238	0	1238

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	355.8	29.6	4.4	0.0	0.0	0.0	389.8
Denied Del/Veh (s)	1474.0	367.2	397.6	0.0	0.0	0.0	638.7
Total Delay (hr)	9.9	7.8	1.1	0.1	32.8	2.8	54.5
Total Del/Veh (s)	191.0	122.8	130.0	87.9	130.5	99.5	134.8
Stop Delay (hr)	10.2	7.6	1.1	0.1	33.2	2.9	55.0
Stop Del/Veh (s)	197.1	119.8	126.3	85.6	131.8	101.7	136.0
Vehicles Entered	177	227	31	5	894	99	1433
Vehicles Exited	176	222	30	5	865	97	1395
Hourly Exit Rate	176	222	30	5	865	97	1395
Input Volume	857	297	45	5	2168	231	3603
% of Volume	21	75	67	100	40	42	39
Denied Entry Before	16	0	0	0	0	0	16
Denied Entry After	692	63	9	0	0	0	764

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	570.7	0.0	0.0	0.0	0.2	570.9
Denied Del/Veh (s)	1589.0	0.0	0.0	0.0	0.6	792.0
Total Delay (hr)	23.8	0.0	0.0	13.1	142.7	179.7
Total Del/Veh (s)	318.8	18.9	2.4	387.3	397.2	375.6
Stop Delay (hr)	23.6	0.0	0.0	12.6	140.5	176.7
Stop Del/Veh (s)	315.9	16.8	2.5	371.1	391.1	369.4
Vehicles Entered	243	5	33	112	1152	1545
Vehicles Exited	242	5	33	108	1123	1511
Hourly Exit Rate	242	5	33	108	1123	1511
Input Volume	1212	6	29	291	3032	4570
% of Volume	20	83	114	37	37	33
Denied Entry Before	72	0	0	0	0	72
Denied Entry After	1050	0	0	0	0	1050

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.4	4.4
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	10	10
Vehicles Exited	10	10
Hourly Exit Rate	10	10
Input Volume	35	35
% of Volume	29	29
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.7	1.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	35	35
Vehicles Exited	35	35
Hourly Exit Rate	35	35
Input Volume	35	35
% of Volume	100	100
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	420.6	0.0	0.0	420.6
Denied Del/Veh (s)	1907.0	0.0	0.0	688.9
Total Delay (hr)	7.9	0.0	8.2	16.2
Total Del/Veh (s)	1361.7	0.0	21.5	40.6
Stop Delay (hr)	8.0	0.0	4.7	12.6
Stop Del/Veh (s)	1366.8	0.0	12.2	31.7
Vehicles Entered	13	39	1365	1417
Vehicles Exited	12	39	1365	1416
Hourly Exit Rate	12	39	1365	1416
Input Volume	735	35	4244	5014
% of Volume	2	111	32	28
Denied Entry Before	61	0	0	61
Denied Entry After	781	0	0	781

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.8	4.8
Total Del/Veh (s)	0.2	12.4	12.1
Stop Delay (hr)	0.0	1.7	1.7
Stop Del/Veh (s)	0.0	4.3	4.2
Vehicles Entered	39	1377	1416
Vehicles Exited	39	1376	1415
Hourly Exit Rate	39	1376	1415
Input Volume	35	4979	5014
% of Volume	111	28	28
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.6	3.0	6.6
Total Del/Veh (s)	0.6	19.1	15.3	16.7
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.1	2.1
Vehicles Entered	39	676	701	1416
Vehicles Exited	39	676	701	1416
Hourly Exit Rate	39	676	701	1416
Input Volume	35	2507	2472	5014
% of Volume	111	27	28	28
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0



16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.2	1.2
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	676	676
Vehicles Exited	675	675
Hourly Exit Rate	675	675
Input Volume	2507	2507
% of Volume	27	27
Denied Entry Before	0	0
Denied Entry After	0	0

17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	1.0	1.0
Total Del/Veh (s)	6.9	5.0	5.1
Stop Delay (hr)	0.0	0.4	0.4
Stop Del/Veh (s)	1.0	2.0	2.0
Vehicles Entered	10	700	710
Vehicles Exited	10	699	709
Hourly Exit Rate	10	699	709
Input Volume	35	2507	2542
% of Volume	29	28	28
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

---

Total Network Performance

---

Denied Delay (hr)	2043.4
Denied Del/Veh (s)	1259.4
Total Delay (hr)	325.5
Total Del/Veh (s)	549.9
Stop Delay (hr)	305.5
Stop Del/Veh (s)	516.0
Vehicles Entered	1836
Vehicles Exited	1721
Hourly Exit Rate	1721
Input Volume	40731
% of Volume	4
Denied Entry Before	157
Denied Entry After	4005

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	34
Stanley Boulevard	5	18.9	26.8	0.1	11
Quandt Road	4	87.9	129.0	0.4	12
Total		107.0	180.0	0.6	12

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	7.2	22.7	0.2	24
	19	1.3	15.6	0.1	34
Greenvalley Drive	2	5.0	11.8	0.1	22
Reliez Valle Road	3	49.1	72.3	0.3	12
	20	26.2	29.9	0.0	4
Springhill Road	4	130.5	139.9	0.1	3
Deer Hill Road	5	360.6	399.0	0.4	4
Project Dwy	11	20.9	29.5	0.1	10
Acalanes Avenue	14	12.5	16.6	0.0	8
	15	19.1	25.3	0.1	9
	16	6.6	16.0	0.1	24
	17	6.9	16.3	0.1	16
Mt. Diablo Boulevard	6	4.4	12.9	0.1	19
SR 24 EB Off Ramp	7	1.7	4.5	0.1	49
Total		652.1	812.3	1.7	7

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	91	41	22
Average Queue (ft)	45	11	1
95th Queue (ft)	75	34	9
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	51	611	114	53	79
Average Queue (ft)	14	566	74	11	29
95th Queue (ft)	35	656	113	34	66
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		84	87		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		76		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	455	481	425	447
Average Queue (ft)	218	456	230	228
95th Queue (ft)	582	471	381	408
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	21	97		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				41
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	372	263	21	530	527	96	214	236
Average Queue (ft)	337	231	2	477	478	79	174	186
95th Queue (ft)	353	248	11	599	609	138	256	263
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	83		88	90		31	88
Queuing Penalty (veh)	0	0		1062	1077		368	1061
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				89	84	0		
Queuing Penalty (veh)				0	194	4		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	556	27	42	275	2273	2409
Average Queue (ft)	204	523	2	11	185	2245	2372
95th Queue (ft)	299	542	14	32	342	2275	2427
Link Distance (ft)		504	342	342		2220	2220
Upstream Blk Time (%)		95				42	95
Queuing Penalty (veh)		0				693	1585
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	8	97			6	27	69
Queuing Penalty (veh)	49	586			85	80	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	10
Average Queue (ft)	0
95th Queue (ft)	5
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB
Directions Served	R	T	TR
Maximum Queue (ft)	202	399	396
Average Queue (ft)	179	223	342
95th Queue (ft)	198	460	416
Link Distance (ft)	176	342	342
Upstream Blk Time (%)	100	2	8
Queuing Penalty (veh)	0	37	174
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB
Directions Served	T	T
Maximum Queue (ft)	186	264
Average Queue (ft)	50	226
95th Queue (ft)	147	279
Link Distance (ft)	150	150
Upstream Blk Time (%)	1	24
Queuing Penalty (veh)	19	590
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	353
Average Queue (ft)	165
95th Queue (ft)	408
Link Distance (ft)	266
Upstream Blk Time (%)	5
Queuing Penalty (veh)	112
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	



---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement	SB
Directions Served	TR
Maximum Queue (ft)	184
Average Queue (ft)	73
95th Queue (ft)	144
Link Distance (ft)	314
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Network Summary

---

Network wide Queuing Penalty: 7775

PHF = 1.0

**Evac 1** – Evacuation (without project) in the AM Peak

## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1829	1780	1769	1792	1766	1788
Vehs Exited	1731	1679	1706	1700	1710	1706
Starting Vehs	281	262	307	270	292	282
Ending Vehs	379	363	370	362	348	362
Denied Entry Before	111	105	100	89	97	101
Denied Entry After	1982	2023	2037	1992	2107	2029
Travel Distance (mi)	1600	1579	1608	1611	1609	1601
Travel Time (hr)	1351.0	1392.4	1406.7	1353.8	1407.4	1382.3
Total Delay (hr)	1295.1	1337.5	1350.7	1297.7	1351.6	1326.5
Total Stops	6213	6007	6125	6099	6108	6112
Fuel Used (gal)	348.4	356.7	360.7	349.6	362.3	355.5

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1829	1780	1769	1792	1766	1788
Vehs Exited	1731	1679	1706	1700	1710	1706
Starting Vehs	281	262	307	270	292	282
Ending Vehs	379	363	370	362	348	362
Denied Entry Before	111	105	100	89	97	101
Denied Entry After	1982	2023	2037	1992	2107	2029
Travel Distance (mi)	1600	1579	1608	1611	1609	1601
Travel Time (hr)	1351.0	1392.4	1406.7	1353.8	1407.4	1382.3
Total Delay (hr)	1295.1	1337.5	1350.7	1297.7	1351.6	1326.5
Total Stops	6213	6007	6125	6099	6108	6112
Fuel Used (gal)	348.4	356.7	360.7	349.6	362.3	355.5

### 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	5.4	3.8
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.7	4.1	2.9
Vehicles Entered	131	24	155
Vehicles Exited	131	24	155
Hourly Exit Rate	131	24	155
Input Volume	130	25	155
% of Volume	101	96	100
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	11.9	0.2	12.2
Total Del/Veh (s)	2.8	90.1	5.4	64.9
Stop Delay (hr)	0.0	10.8	0.2	11.0
Stop Del/Veh (s)	3.0	81.4	3.7	58.4
Vehicles Entered	44	467	154	665
Vehicles Exited	44	461	155	660
Hourly Exit Rate	44	461	155	660
Input Volume	42	478	155	675
% of Volume	105	96	100	98
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	340.2	0.0	340.2
Denied Del/Veh (s)	1091.5	0.0	687.3
Total Delay (hr)	17.0	6.6	23.7
Total Del/Veh (s)	157.5	35.4	80.1
Stop Delay (hr)	16.8	5.4	22.2
Stop Del/Veh (s)	155.7	28.7	75.2
Vehicles Entered	376	660	1036
Vehicles Exited	369	660	1029
Hourly Exit Rate	369	660	1029
Input Volume	1124	675	1799
% of Volume	33	98	57
Denied Entry Before	6	0	6
Denied Entry After	746	0	746

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	256.6	6.0	1.0	0.0	0.0	0.0	263.6
Denied Del/Veh (s)	1364.6	96.2	92.9	0.0	0.0	0.0	482.6
Total Delay (hr)	10.0	6.9	1.2	0.1	31.9	2.8	52.9
Total Del/Veh (s)	206.2	114.7	114.1	99.9	122.7	94.6	128.9
Stop Delay (hr)	10.3	6.8	1.1	0.1	31.9	2.9	53.0
Stop Del/Veh (s)	212.2	111.7	110.2	97.4	122.8	95.7	129.3
Vehicles Entered	166	216	36	3	918	107	1446
Vehicles Exited	165	212	36	3	896	103	1415
Hourly Exit Rate	165	212	36	3	896	103	1415
Input Volume	643	223	34	4	1626	173	2703
% of Volume	26	95	106	75	55	60	52
Denied Entry Before	11	1	0	0	0	0	12
Denied Entry After	511	8	1	0	0	0	520

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	422.6	0.0	0.0	0.0	0.0	422.6
Denied Del/Veh (s)	1507.7	0.0	0.0	0.0	0.0	659.7
Total Delay (hr)	24.0	0.0	0.0	13.3	141.8	179.2
Total Del/Veh (s)	315.9	29.4	3.3	380.3	396.7	377.1
Stop Delay (hr)	23.9	0.0	0.0	12.7	138.9	175.6
Stop Del/Veh (s)	313.5	27.4	3.4	363.3	388.7	369.4
Vehicles Entered	246	4	21	115	1157	1543
Vehicles Exited	248	3	22	112	1123	1508
Hourly Exit Rate	248	3	22	112	1123	1508
Input Volume	909	4	22	218	2274	3427
% of Volume	27	75	100	51	49	44
Denied Entry Before	83	0	0	0	0	83
Denied Entry After	763	0	0	0	0	763

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.5	4.5
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	12	12
Vehicles Exited	12	12
Hourly Exit Rate	12	12
Input Volume	26	26
% of Volume	46	46
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.8	1.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.2	0.2
Vehicles Entered	29	29
Vehicles Exited	29	29
Hourly Exit Rate	29	29
Input Volume	26	26
% of Volume	112	112
Denied Entry Before	0	0
Denied Entry After	0	0

14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.5	4.5
Total Del/Veh (s)	0.2	11.9	11.7
Stop Delay (hr)	0.0	1.4	1.4
Stop Del/Veh (s)	0.0	3.8	3.7
Vehicles Entered	25	1372	1397
Vehicles Exited	25	1372	1397
Hourly Exit Rate	25	1372	1397
Input Volume	26	3183	3209
% of Volume	96	43	44
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.5
Total Del/Veh (s)	0.6	19.0	15.1	16.8
Stop Delay (hr)	0.0	0.4	0.4	0.9
Stop Del/Veh (s)	0.0	2.3	2.3	2.3
Vehicles Entered	25	689	683	1397
Vehicles Exited	25	689	683	1397
Hourly Exit Rate	25	689	683	1397
Input Volume	26	1605	1578	3209
% of Volume	96	43	43	44
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	689	689
Vehicles Exited	689	689
Hourly Exit Rate	689	689
Input Volume	1605	1605
% of Volume	43	43
Denied Entry Before	0	0
Denied Entry After	0	0



### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0
Total Delay (hr)	0.0	1.0	1.1
Total Del/Veh (s)	7.8	5.3	5.3
Stop Delay (hr)	0.0	0.4	0.4
Stop Del/Veh (s)	1.8	2.1	2.1
Vehicles Entered	12	705	717
Vehicles Exited	12	704	716
Hourly Exit Rate	12	704	716
Input Volume	26	1605	1631
% of Volume	46	44	44
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### Total Network Performance

Denied Delay (hr)	1027.1
Denied Del/Veh (s)	968.7
Total Delay (hr)	299.5
Total Del/Veh (s)	521.3
Stop Delay (hr)	277.9
Stop Del/Veh (s)	483.8
Vehicles Entered	1788
Vehicles Exited	1706
Hourly Exit Rate	1706
Input Volume	27792
% of Volume	6
Denied Entry Before	101
Denied Entry After	2029

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.1	0.1	11
	11	0.0	4.0	0.0	34
Stanley Boulevard	5	29.4	36.5	0.1	8
Quandt Road	4	99.9	148.7	0.4	11
Total		129.5	209.3	0.6	11

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.4	20.6	0.2	27
	19	0.9	16.0	0.1	33
Greenvally Drive	2	5.4	12.3	0.1	21
Reliez Valle Road	3	31.8	55.7	0.3	16
	20	23.5	27.1	0.0	4
Springhill Road	4	122.7	132.1	0.1	3
Deer Hill Road	5	365.6	404.1	0.4	4
	11	19.1	27.7	0.1	10
Acalanes Avenue	14	11.9	15.9	0.0	9
	15	19.0	25.1	0.1	9
	16	6.6	16.0	0.1	24
	17	7.8	16.2	0.1	16
Mt. Diablo Boulevard	6	4.5	12.4	0.1	20
SR 24 EB Off Ramp	7	1.8	4.6	0.1	49
Total		625.8	785.8	1.7	8

# Queuing and Blocking Report

## Evacuation Scenario 1

08/23/2020

### Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	68	32	11
Average Queue (ft)	37	6	0
95th Queue (ft)	65	25	5
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

### Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	34	562	73	47	71
Average Queue (ft)	9	413	19	9	26
95th Queue (ft)	24	637	74	32	58
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		22	12		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		67		0	
Queuing Penalty (veh)		0		0	

### Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	454	486	339	344
Average Queue (ft)	237	456	177	175
95th Queue (ft)	599	474	273	281
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	24	94		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				26
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	368	254	15	521	527	96	212	215
Average Queue (ft)	336	227	1	470	472	76	161	179
95th Queue (ft)	353	257	8	597	611	140	252	267
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	99	70		83	87		22	82
Queuing Penalty (veh)	0	0		748	784		202	736
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				86	82	0		
Queuing Penalty (veh)				0	142	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	547	23	38	275	2273	2408
Average Queue (ft)	210	523	3	9	173	2241	2368
95th Queue (ft)	283	537	15	30	328	2310	2462
Link Distance (ft)		504	347	347		2220	2220
Upstream Blk Time (%)		95				42	95
Queuing Penalty (veh)		0				520	1178
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	8	97			4	26	66
Queuing Penalty (veh)	36	441			51	56	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

---

Movement	SB
Directions Served	T
Maximum Queue (ft)	5
Average Queue (ft)	0
95th Queue (ft)	3
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	B11	B11
----------	----	----	-----	-----

Directions Served	T	T	T	T
-------------------	---	---	---	---

Maximum Queue (ft)	167	258	387	387
--------------------	-----	-----	-----	-----

Average Queue (ft)	36	209	196	337
--------------------	----	-----	-----	-----

95th Queue (ft)	119	296	420	420
-----------------	-----	-----	-----	-----

Link Distance (ft)	147	147	347	347
--------------------	-----	-----	-----	-----

Upstream Blk Time (%)	1	20	1	6
-----------------------	---	----	---	---

Queuing Penalty (veh)	9	324	13	99
-----------------------	---	-----	----	----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 15: Pleasant Hill Road

Movement	SB	SB
----------	----	----

Directions Served	T	TR
-------------------	---	----

Maximum Queue (ft)	11	354
--------------------	----	-----

Average Queue (ft)	0	191
--------------------	---	-----

95th Queue (ft)	8	441
-----------------	---	-----

Link Distance (ft)	266	266
--------------------	-----	-----

Upstream Blk Time (%)		6
-----------------------	--	---

Queuing Penalty (veh)		94
-----------------------	--	----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

## Queuing and Blocking Report Evacuation Scenario 1

08/23/2020

### Intersection: 16: Pleasant Hill Road

#### Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

### Intersection: 17: Pleasant Hill Road

#### Movement

SB

SB

Directions Served

T

TR

Maximum Queue (ft)

14

165

Average Queue (ft)

0

75

95th Queue (ft)

10

147

Link Distance (ft)

314

314

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

### Network Summary

Network wide Queuing Penalty: 5435

PHF = 1.0

**Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM  
Peak



## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	2313	2278	2198	2250	2209	2249
Vehs Exited	2165	2144	2089	2068	2058	2105
Starting Vehs	258	231	256	249	270	256
Ending Vehs	406	365	365	431	421	397
Denied Entry Before	144	167	171	169	170	165
Denied Entry After	2127	2179	2246	2233	2121	2181
Travel Distance (mi)	1976	1959	1927	1894	1879	1927
Travel Time (hr)	1489.0	1424.4	1515.3	1507.4	1458.8	1479.0
Total Delay (hr)	1419.8	1355.7	1448.0	1441.1	1392.7	1411.4
Total Stops	9117	8435	8871	8651	8322	8680
Fuel Used (gal)	391.0	376.5	395.1	393.7	380.7	387.4

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	2313	2278	2198	2250	2209	2249
Vehs Exited	2165	2144	2089	2068	2058	2105
Starting Vehs	258	231	256	249	270	256
Ending Vehs	406	365	365	431	421	397
Denied Entry Before	144	167	171	169	170	165
Denied Entry After	2127	2179	2246	2233	2121	2181
Travel Distance (mi)	1976	1959	1927	1894	1879	1927
Travel Time (hr)	1489.0	1424.4	1515.3	1507.4	1458.8	1479.0
Total Delay (hr)	1419.8	1355.7	1448.0	1441.1	1392.7	1411.4
Total Stops	9117	8435	8871	8651	8322	8680
Fuel Used (gal)	391.0	376.5	395.1	393.7	380.7	387.4

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.1	0.1
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	5.8	3.9
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.8	4.2	3.0
Vehicles Entered	133	23	156
Vehicles Exited	133	23	156
Hourly Exit Rate	133	23	156
Input Volume	130	25	155
% of Volume	102	92	101
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	13.6	0.2	13.9
Total Del/Veh (s)	2.7	101.7	5.2	73.8
Stop Delay (hr)	0.0	12.5	0.2	12.7
Stop Del/Veh (s)	3.0	93.2	3.6	67.3
Vehicles Entered	39	469	156	664
Vehicles Exited	38	463	156	657
Hourly Exit Rate	38	463	156	657
Input Volume	42	478	155	675
% of Volume	90	97	101	97
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	183.4	0.0	183.4
Denied Del/Veh (s)	578.6	0.0	367.2
Total Delay (hr)	14.4	4.6	19.0
Total Del/Veh (s)	72.8	24.8	49.4
Stop Delay (hr)	12.4	3.6	15.9
Stop Del/Veh (s)	62.7	19.0	41.5
Vehicles Entered	698	657	1355
Vehicles Exited	692	658	1350
Hourly Exit Rate	692	658	1350
Input Volume	1124	675	1799
% of Volume	62	97	75
Denied Entry Before	8	0	8
Denied Entry After	443	0	443

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	277.0	0.8	0.1	0.0	0.0	0.0	278.0
Denied Del/Veh (s)	1445.2	13.3	15.6	0.0	0.0	0.0	434.5
Total Delay (hr)	9.2	5.0	0.8	0.1	21.5	1.9	38.4
Total Del/Veh (s)	221.2	78.3	84.8	80.9	62.7	52.3	77.8
Stop Delay (hr)	9.4	4.7	0.8	0.1	19.1	1.8	35.9
Stop Del/Veh (s)	226.4	74.7	80.3	80.3	55.8	49.2	72.6
Vehicles Entered	141	226	34	4	1220	129	1754
Vehicles Exited	141	225	33	4	1196	127	1726
Hourly Exit Rate	141	225	33	4	1196	127	1726
Input Volume	643	223	34	4	1626	173	2703
% of Volume	22	101	97	100	74	73	64
Denied Entry Before	40	0	0	0	0	0	40
Denied Entry After	549	0	0	0	0	0	549

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	429.5	0.0	0.0	0.0	0.0	429.5
Denied Del/Veh (s)	1546.1	0.0	0.0	0.0	0.0	619.4
Total Delay (hr)	22.1	0.0	0.0	3.5	24.5	50.2
Total Del/Veh (s)	326.7	19.3	3.6	95.9	64.4	101.8
Stop Delay (hr)	21.8	0.0	0.0	3.3	21.3	46.4
Stop Del/Veh (s)	323.3	17.4	3.8	89.6	55.8	94.2
Vehicles Entered	218	4	22	129	1341	1714
Vehicles Exited	218	4	22	131	1342	1717
Hourly Exit Rate	218	4	22	131	1342	1717
Input Volume	909	4	22	218	2274	3427
% of Volume	24	100	100	60	59	50
Denied Entry Before	82	0	0	0	0	82
Denied Entry After	782	0	0	0	0	782

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	5.8	5.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	7	7
Vehicles Exited	7	7
Hourly Exit Rate	7	7
Input Volume	26	26
% of Volume	27	27
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.9	1.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.3	0.3
Vehicles Entered	31	31
Vehicles Exited	31	31
Hourly Exit Rate	31	31
Input Volume	26	26
% of Volume	119	119
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	205.8	0.0	0.0	205.8
Denied Del/Veh (s)	1266.7	0.0	0.0	341.3
Total Delay (hr)	7.0	0.0	14.4	21.3
Total Del/Veh (s)	115.4	0.0	32.9	42.3
Stop Delay (hr)	7.4	0.0	11.8	19.2
Stop Del/Veh (s)	123.2	0.0	27.0	38.1
Vehicles Entered	211	26	1560	1797
Vehicles Exited	210	26	1556	1792
Hourly Exit Rate	210	26	1556	1792
Input Volume	551	26	3183	3760
% of Volume	38	100	49	48
Denied Entry Before	31	0	0	31
Denied Entry After	374	0	0	374

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	8.6	8.6
Total Del/Veh (s)	0.2	17.6	17.3
Stop Delay (hr)	0.0	8.4	8.4
Stop Del/Veh (s)	0.0	17.2	16.9
Vehicles Entered	26	1766	1792
Vehicles Exited	26	1758	1784
Hourly Exit Rate	26	1758	1784
Input Volume	26	3734	3760
% of Volume	100	47	47
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.7	1.6	12.3
Total Del/Veh (s)	0.6	42.8	6.6	24.6
Stop Delay (hr)	0.0	12.0	0.2	12.2
Stop Del/Veh (s)	0.0	48.3	0.8	24.5
Vehicles Entered	26	889	869	1784
Vehicles Exited	26	882	870	1778
Hourly Exit Rate	26	882	870	1778
Input Volume	26	1880	1854	3760
% of Volume	100	47	47	47
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	16.6	16.6
Total Del/Veh (s)	66.3	66.3
Stop Delay (hr)	18.9	18.9
Stop Del/Veh (s)	75.5	75.5
Vehicles Entered	882	882
Vehicles Exited	882	882
Hourly Exit Rate	882	882
Input Volume	1880	1880
% of Volume	47	47
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.2	14.9	15.2
Denied Del/Veh (s)	106.7	59.3	59.7
Total Delay (hr)	0.1	15.0	15.1
Total Del/Veh (s)	59.2	60.5	60.4
Stop Delay (hr)	0.1	17.5	17.6
Stop Del/Veh (s)	63.0	70.6	70.5
Vehicles Entered	7	876	883
Vehicles Exited	7	875	882
Hourly Exit Rate	7	875	882
Input Volume	26	1880	1906
% of Volume	27	47	46
Denied Entry Before	0	2	2
Denied Entry After	1	30	31

---

Total Network Performance

---

Denied Delay (hr)	1113.6
Denied Del/Veh (s)	905.0
Total Delay (hr)	297.8
Total Del/Veh (s)	428.5
Stop Delay (hr)	274.0
Stop Del/Veh (s)	394.3
Vehicles Entered	2249
Vehicles Exited	2105
Hourly Exit Rate	2105
Input Volume	33042
% of Volume	6
Denied Entry Before	165
Denied Entry After	2181



Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	33
Stanley Boulevard	5	19.3	27.1	0.1	10
	37	1.8	9.7	0.1	31
Quandt Road	4	80.9	116.6	0.4	11
Total		102.1	177.8	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.8	21.2	0.2	26
	19	1.0	16.4	0.1	33
Greenvalley Drive	2	5.2	12.0	0.1	21
Reliez Valle Road	3	20.2	43.9	0.3	21
	20	11.5	15.1	0.0	8
Springhill Road	4	62.7	72.2	0.1	5
	37	196.3	231.5	0.4	6
Deer Hill Road	5	64.4	72.3	0.1	4
Project Dwy	11	33.0	41.4	0.1	7
Acalanes Avenue	14	18.2	22.3	0.0	6
	15	42.8	48.9	0.1	5
	16	66.3	75.6	0.1	5
	17	59.2	189.6	0.1	4
Mt. Diablo Boulevard	6	5.8	13.5	0.1	18
SR 24 EB Off Ramp	7	1.9	4.7	0.1	48
Total		594.2	880.6	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	76	46	16
Average Queue (ft)	39	7	1
95th Queue (ft)	64	28	7
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	34	585	84	47	61
Average Queue (ft)	10	446	27	10	23
95th Queue (ft)	26	659	87	31	52
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		32	26		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		70		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	467	487	270	294
Average Queue (ft)	281	459	147	161
95th Queue (ft)	634	478	215	228
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	17	80		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				20
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	368	258	15	506	515	96	212	229
Average Queue (ft)	336	211	2	375	383	62	94	130
95th Queue (ft)	353	278	10	632	651	137	222	278
Link Distance (ft)	318	217		406	406		127	127
Upstream Blk Time (%)	100	32		37	51		8	41
Queuing Penalty (veh)	0	0		337	458		69	371
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				56	57	0		
Queuing Penalty (veh)				0	98	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB	SB	B37	B37
Directions Served	L	LT	T	R	L	T	T	T	T	T
Maximum Queue (ft)	225	550	22	43	275	442	447	441	1884	2009
Average Queue (ft)	108	522	2	8	174	366	392	410	1590	1711
95th Queue (ft)	271	536	13	29	316	523	454	467	2522	2656
Link Distance (ft)		504	342	342		351	351	351	1832	1832
Upstream Blk Time (%)		96				23	33	41	21	76
Queuing Penalty (veh)		0				193	278	337	260	943
Storage Bay Dist (ft)	185				175					
Storage Blk Time (%)		92			9	4		60		
Queuing Penalty (veh)		418			69	9		0		

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

---

Movement	SB
Directions Served	T
Maximum Queue (ft)	5
Average Queue (ft)	0
95th Queue (ft)	4
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB	SB
----------	----	----	----	----

Directions Served	R	T	T	TR
-------------------	---	---	---	----

Maximum Queue (ft)	218	395	389	391
--------------------	-----	-----	-----	-----

Average Queue (ft)	184	156	346	337
--------------------	-----	-----	-----	-----

95th Queue (ft)	201	366	416	447
-----------------	-----	-----	-----	-----

Link Distance (ft)	164	342	342	342
--------------------	-----	-----	-----	-----

Upstream Blk Time (%)	100	2	15	10
-----------------------	-----	---	----	----

Queuing Penalty (veh)	0	17	158	109
-----------------------	---	----	-----	-----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	SB
Directions Served	T	T	T
Maximum Queue (ft)	164	267	237
Average Queue (ft)	36	237	184
95th Queue (ft)	122	258	270
Link Distance (ft)	152	152	152
Upstream Blk Time (%)	1	97	11
Queuing Penalty (veh)	12	1208	140
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 15: Pleasant Hill Road

Movement	SB	SB	SB
Directions Served	T	T	R
Maximum Queue (ft)	56	370	283
Average Queue (ft)	11	341	106
95th Queue (ft)	47	363	244
Link Distance (ft)	262	262	262
Upstream Blk Time (%)		99	0
Queuing Penalty (veh)		1230	5
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 16: Pleasant Hill Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	542
Average Queue (ft)	512
95th Queue (ft)	534
Link Distance (ft)	302
Upstream Blk Time (%)	100
Queuing Penalty (veh)	939
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 17: Pleasant Hill Road

Movement	SB	SB
Directions Served	T	TR
Maximum Queue (ft)	188	535
Average Queue (ft)	15	505
95th Queue (ft)	123	526
Link Distance (ft)	314	314
Upstream Blk Time (%)	0	99
Queuing Penalty (veh)	0	622
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Network Summary

Network wide Queuing Penalty: 8283
------------------------------------

PHF = 1.0

**Evac 1 + Project Variant**– Evacuation plus project, no trap lane, in the  
AM Peak



## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1718	1770	1818	1793	1804	1781
Vehs Exited	1667	1680	1753	1687	1699	1696
Starting Vehs	332	280	318	278	287	299
Ending Vehs	383	370	383	384	392	380
Denied Entry Before	188	149	166	161	143	161
Denied Entry After	2724	2604	2474	2543	2560	2582
Travel Distance (mi)	1573	1588	1620	1618	1608	1601
Travel Time (hr)	1799.8	1669.5	1677.1	1653.3	1680.2	1696.0
Total Delay (hr)	1745.0	1614.2	1620.7	1597.2	1624.2	1640.3
Total Stops	6005	6096	6145	6278	6138	6134
Fuel Used (gal)	447.6	420.7	423.1	417.9	422.6	426.4

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1718	1770	1818	1793	1804	1781
Vehs Exited	1667	1680	1753	1687	1699	1696
Starting Vehs	332	280	318	278	287	299
Ending Vehs	383	370	383	384	392	380
Denied Entry Before	188	149	166	161	143	161
Denied Entry After	2724	2604	2474	2543	2560	2582
Travel Distance (mi)	1573	1588	1620	1618	1608	1601
Travel Time (hr)	1799.8	1669.5	1677.1	1653.3	1680.2	1696.0
Total Delay (hr)	1745.0	1614.2	1620.7	1597.2	1624.2	1640.3
Total Stops	6005	6096	6145	6278	6138	6134
Fuel Used (gal)	447.6	420.7	423.1	417.9	422.6	426.4

1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	6.8	4.0
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.7	5.1	3.1
Vehicles Entered	135	26	161
Vehicles Exited	135	26	161
Hourly Exit Rate	135	26	161
Input Volume	130	25	155
% of Volume	104	104	104
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

2: Pleasant Hill Road & Greenvally Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.7	0.2	11.0
Total Del/Veh (s)	3.2	82.0	5.0	58.4
Stop Delay (hr)	0.0	9.6	0.2	9.8
Stop Del/Veh (s)	3.4	73.3	3.4	52.0
Vehicles Entered	45	457	160	662
Vehicles Exited	45	454	159	658
Hourly Exit Rate	45	454	159	658
Input Volume	42	478	155	675
% of Volume	107	95	103	97
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	366.7	0.0	366.7
Denied Del/Veh (s)	1156.1	0.0	733.9
Total Delay (hr)	17.0	7.7	24.7
Total Del/Veh (s)	170.9	41.0	86.2
Stop Delay (hr)	17.1	6.4	23.4
Stop Del/Veh (s)	171.0	34.2	81.8
Vehicles Entered	348	657	1005
Vehicles Exited	340	655	995
Hourly Exit Rate	340	655	995
Input Volume	1124	675	1799
% of Volume	30	97	55
Denied Entry Before	12	0	12
Denied Entry After	794	0	794

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	232.9	5.0	0.9	0.0	0.0	0.0	238.9
Denied Del/Veh (s)	1302.1	78.2	89.6	0.0	0.0	0.0	450.7
Total Delay (hr)	9.8	6.7	1.2	0.1	32.7	3.0	53.4
Total Del/Veh (s)	181.3	106.8	120.8	81.7	129.3	109.9	131.2
Stop Delay (hr)	10.2	6.5	1.1	0.1	32.9	3.0	53.8
Stop Del/Veh (s)	187.4	103.4	116.2	79.8	130.5	111.8	132.2
Vehicles Entered	186	223	35	5	894	97	1440
Vehicles Exited	185	220	35	5	869	93	1407
Hourly Exit Rate	185	220	35	5	869	93	1407
Input Volume	643	223	34	4	1626	173	2703
% of Volume	29	99	103	125	53	54	52
Denied Entry Before	15	0	0	0	0	0	15
Denied Entry After	458	9	1	0	0	0	468

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	392.5	0.0	0.0	0.0	0.0	392.5
Denied Del/Veh (s)	1474.8	0.0	0.0	0.0	0.0	625.7
Total Delay (hr)	24.1	0.0	0.0	13.2	142.1	179.4
Total Del/Veh (s)	329.5	21.8	2.9	374.4	394.4	377.1
Stop Delay (hr)	23.9	0.0	0.0	12.5	139.4	175.8
Stop Del/Veh (s)	327.1	19.9	3.0	354.8	386.9	369.6
Vehicles Entered	238	5	21	115	1159	1538
Vehicles Exited	235	5	21	113	1132	1506
Hourly Exit Rate	235	5	21	113	1132	1506
Input Volume	909	4	22	218	2274	3427
% of Volume	26	125	95	52	50	44
Denied Entry Before	69	0	0	0	0	69
Denied Entry After	720	0	0	0	0	720

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.9	4.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	8	8
Vehicles Exited	8	8
Hourly Exit Rate	8	8
Input Volume	26	26
% of Volume	31	31
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.7	1.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	23	23
Vehicles Exited	23	23
Hourly Exit Rate	23	23
Input Volume	26	26
% of Volume	88	88
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	333.1	0.0	0.0	333.1
Denied Del/Veh (s)	1956.2	0.0	0.0	598.1
Total Delay (hr)	8.0	0.0	8.0	16.1
Total Del/Veh (s)	1374.8	0.0	21.0	40.7
Stop Delay (hr)	8.1	0.0	4.5	12.5
Stop Del/Veh (s)	1380.2	0.0	11.7	31.7
Vehicles Entered	13	25	1367	1405
Vehicles Exited	13	25	1368	1406
Hourly Exit Rate	13	25	1368	1406
Input Volume	551	26	3183	3760
% of Volume	2	96	43	37
Denied Entry Before	65	0	0	65
Denied Entry After	600	0	0	600

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.7	4.7
Total Del/Veh (s)	0.2	12.3	12.1
Stop Delay (hr)	0.0	1.6	1.6
Stop Del/Veh (s)	0.0	4.0	4.0
Vehicles Entered	25	1381	1406
Vehicles Exited	25	1382	1407
Hourly Exit Rate	25	1382	1407
Input Volume	26	3734	3760
% of Volume	96	37	37
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.6
Total Del/Veh (s)	0.6	19.0	15.3	16.8
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.1	2.1
Vehicles Entered	25	694	688	1407
Vehicles Exited	25	697	686	1408
Hourly Exit Rate	25	697	686	1408
Input Volume	26	1880	1854	3760
% of Volume	96	37	37	37
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	697	697
Vehicles Exited	697	697
Hourly Exit Rate	697	697
Input Volume	1880	1880
% of Volume	37	37
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	1.0	1.0
Total Del/Veh (s)	7.6	4.8	4.8
Stop Delay (hr)	0.0	0.3	0.3
Stop Del/Veh (s)	1.2	1.7	1.7
Vehicles Entered	8	716	724
Vehicles Exited	8	714	722
Hourly Exit Rate	8	714	722
Input Volume	26	1880	1906
% of Volume	31	38	38
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

---

Total Network Performance

---

Denied Delay (hr)	1331.4
Denied Del/Veh (s)	1098.6
Total Delay (hr)	308.8
Total Del/Veh (s)	535.6
Stop Delay (hr)	287.7
Stop Del/Veh (s)	499.0
Vehicles Entered	1781
Vehicles Exited	1696
Hourly Exit Rate	1696
Input Volume	30546
% of Volume	6
Denied Entry Before	161
Denied Entry After	2582



Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	34
Stanley Boulevard	5	21.8	29.1	0.1	10
Quandt Road	4	81.7	122.2	0.4	13
Total		103.8	175.6	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	6.8	22.1	0.2	25
	19	1.2	15.8	0.1	34
Greenvalley Drive	2	5.0	11.9	0.1	22
Reliez Valle Road	3	37.7	61.6	0.3	15
	20	24.4	28.0	0.0	4
Springhill Road	4	129.3	138.7	0.1	3
Deer Hill Road	5	358.8	396.8	0.4	4
Project Dwy	11	20.5	29.0	0.1	10
Acalanes Avenue	14	12.4	16.4	0.0	8
	15	19.0	25.1	0.1	9
	16	6.6	16.0	0.1	24
	17	7.6	17.2	0.1	15
Mt. Diablo Boulevard	6	4.9	13.5	0.1	18
SR 24 EB Off Ramp	7	1.7	4.5	0.1	50
Total		635.7	796.7	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	77	45	16
Average Queue (ft)	38	8	1
95th Queue (ft)	63	30	7
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	44	567	56	50	64
Average Queue (ft)	11	385	10	9	25
95th Queue (ft)	29	611	51	31	57
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		12	5		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		63		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	459	488	358	394
Average Queue (ft)	253	456	187	189
95th Queue (ft)	615	491	312	337
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	27	94		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				28
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	369	258	16	526	525	96	207	220
Average Queue (ft)	338	223	2	476	476	76	164	183
95th Queue (ft)	355	265	9	581	604	140	245	262
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	64		86	90		24	85
Queuing Penalty (veh)	0	0		775	809		213	762
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				89	84	0		
Queuing Penalty (veh)				0	145	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	547	28	29	275	2274	2410
Average Queue (ft)	212	521	3	8	192	2241	2371
95th Queue (ft)	276	536	15	28	344	2292	2451
Link Distance (ft)		504	342	342		2220	2220
Upstream Blk Time (%)		95				41	95
Queuing Penalty (veh)		0				506	1182
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	11	97			4	30	68
Queuing Penalty (veh)	52	440			47	64	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	2
Average Queue (ft)	0
95th Queue (ft)	2
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB
----------	----	----	----

Directions Served	R	T	TR
-------------------	---	---	----

Maximum Queue (ft)	204	392	380
--------------------	-----	-----	-----

Average Queue (ft)	180	212	338
--------------------	-----	-----	-----

95th Queue (ft)	199	435	410
-----------------	-----	-----	-----

Link Distance (ft)	176	342	342
--------------------	-----	-----	-----

Upstream Blk Time (%)	100	1	7
-----------------------	-----	---	---

Queuing Penalty (veh)	0	23	114
-----------------------	---	----	-----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB
Directions Served	T	T
Maximum Queue (ft)	180	257
Average Queue (ft)	48	214
95th Queue (ft)	146	294
Link Distance (ft)	150	150
Upstream Blk Time (%)	1	22
Queuing Penalty (veh)	15	409
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	351
Average Queue (ft)	179
95th Queue (ft)	424
Link Distance (ft)	266
Upstream Blk Time (%)	5
Queuing Penalty (veh)	89
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement	SB
Directions Served	TR
Maximum Queue (ft)	161
Average Queue (ft)	67
95th Queue (ft)	128
Link Distance (ft)	314
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Network Summary

---

Network wide Queuing Penalty: 5648

---

Enclosure LPMC Meeting  
Agenda Package



**IMPORTANT NOTICE REGARDING THIS MEETING:** To protect our residents, officials, and staff, and in alignment with the Governor's recent Executive Order N 29-20 in which certain teleconference requirements of the Brown Act have been suspended, including the requirement to provide a physical location for members of the public to participate in the meeting, this meeting will be held by Teleconference.

<p>BY TELECONFERENCE VIA ZOOM WEBINAR</p>	<p>Attending by PC: MEETING URL: <a href="https://tinyurl.com/y55szfo9">https://tinyurl.com/y55szfo9</a> MEETING ID: 980 7543 8589 Attending by Telephone: +1 669-900-9128 MEETING ID: 980 7543 8589</p>
---	--

## LAMORINDA PROGRAM MANAGEMENT COMMITTEE (LPMC) MEETING AGENDA

Monday, January 11, 2021, 1:30 PM

City of Orinda

### How to follow or participate in the meeting:

1. Members of the public may observe and participate in the meeting at the teleconference location highlighted above. *(Please note that due to the remote nature of the meeting, the City of Orinda cannot guarantee that the network or its site will not experience technical interruptions. To ensure that the LPMC receives your comments, we **strongly encourage you to submit your comments in writing in advance** of the meeting by following instructions in below.)*
2. Send your e-mail to [JChen@cityoforinda.org](mailto:JChen@cityoforinda.org) by 8 am on the day of the meeting. Those e-mails will be forwarded to the LPMC. They will also be made a part of the public record and be available to view by 10 am on the day of the meeting by following this link: <https://ccta-swat.net/upcoming-meeting-LPMC/>
3. Comments may also be submitted by e-mail during the meeting up until the closure of public comment period on the relevant agenda item. These will be read into the record by staff at their normal cadence and will be limited to a maximum of 3 minutes. To be read into the record, e-mail must contain in the subject line "Public Comment – Not on the Agenda" or "Public Comment – Agenda Item #" with the relevant agenda item indicated.
4. During the meeting, the Chair will call for public comment. If you wish to address the LPMC, please so indicate by using the "raise your hand" function at that time and the Chair will add you to the speaker list and call your name when it is your turn.

- a) App/Browser Attendees: Those who are joining us using the Zoom app or via internet browser, can click on the “raise your hand” icon found in the control panel. Generally, the control panel is located at the bottom of your screen; however, this may vary depending on the type of device and/or the method by which you’re joining the meeting.
- b) Telephone Attendees: Those who are joining us by telephone—only, please press “ **\*9** ” This lets the moderator know that you wish to make a comment.

**1. Call to Order the Lamorinda Program Management Committee**

**2. Roll Call**

**3. Adoption of the LPMC Agenda**

**4. Public Comment**

**5. Consent Calendar:**

- a. **February 3, 2020 Minutes**  
**Recommendation: Approve**

**6. New Business:**

- a. **Addition of a Short-Link Southbound Lane on Pleasant Hill Road as part of the Proposed Terraces of Lafayette Project**

**Recommendation:**

- i. LPMC review, provide comments, and distribute the recommended language for amending the Lamorinda Action Plan to all of the regional transportation planning committees (RTPCs) within Contra Costa County for comment. The recommended amendment language is specifically written in Recommended Action ii below.
- ii. LPMC review, provide comments, and forward the proposed amendment to the Southwest Area Transportation Committee (SWAT) for their review of the request to amend the Lamorinda Action Plan Gateway Constraint Policy for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph, of the Lamorinda Action Plan, 2017) to read:


**“The two southbound through lanes on Pleasant Hill Road-Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any through lanes, except short-link segments providing access to SR-24.”**

**The other details of the gateway constraint policy shall remain unchanged.**

- iii. LPMC review, provide comments, and forward the proposed request that SWAT review the request to allow construction of the proposed southbound trap lane.

## **7. Adjourn LPMC Meeting to Monday, February 1, 2021 1:30 p.m.**

I, Jason Chen, declare under penalty of perjury under the laws of the State of California that this regular meeting agenda has been posted at least 72 hours in advance at the Orinda City Hall, 22 Orinda Way and the Orinda Library, 26 Orinda Way.



---

Jason Chen, City Engineer

Location of Agendas and Agenda Packets: Agendas and packets are available for review by the public by following this link: <https://ccta-swat.net/upcoming-meeting-LPMC/> and during regular business hours at the Orinda City Hall, 22 Orinda Way, Orinda, CA 94563. Agendas and packets shall be made available at least 72 hours in advance of regular meetings and 24 hours in advance of special meetings.

Any writings or documents pertaining to an open session item provided to a majority of the Lamorinda Program Management Committee less than 72 hours prior to the meeting, shall be made available for public inspection at this link: <https://ccta-swat.net/upcoming-meeting-LPMC/> and at the Orinda City Hall, 22 Orinda Way, Orinda, CA 94563.

# LAMORINDA PROGRAM MANAGEMENT COMMITTEE

Monday, February 3, 2020

Supervisor Andersen's Office  
3338 Mt. Diablo Blvd.  
Lafayette, CA 94549

## LPMC SUMMARY MINUTES

### 1. Call to Order the Lamorinda Program Management Committee

*Chair Gerringer called the meeting to order at 1:40 p.m.*

### 2. Roll Call

*LPMC Members Present: Chair Teresa Gerringer, Lafayette; Vice Chair Amy Worth, Orinda; and Mike McCluer for Renata Sos, Moraga.*

*Staff Present: Mike Moran, Justin Horng, and Greg Wolff, Lafayette; Jason Chen, Orinda; Shawn Knapp, Moraga; and Matt Kelly, CCTA*

### 3. Adoption of the LPMC Agenda

*Worth moved, Gerringer seconded, and the LPMC unanimously adopted the LPMC agenda.*

### 4. Public Comment - None

### 5. Old Business - None

### 6. New Business:

#### a. Election of New Chair and Vice Chair for 2020

*Gerringer moved, McCluer seconded, to elect Worth as Chair and Sos as Vice-Chair; the motion passes unanimous voice vote.*

#### b. Briefing on the Proposed Terraces of Lafayette Development Project

##### **Recommendation: For information only – No Action Required**

*Wolff gave a briefing based on the staff report. Dave Baker, representing the applicant was also present at the meeting. Kristen Altbaum, a resident, provided her public comment based on the notes she provided to staff (attached).*

*The meeting was adjourned at 2:13 p.m.*

*Respectfully submitted by*

---

*Jason Chen, City Engineer, Orinda*

I would like to argue that this Site Plan for O'brien should NOT be approved or promoted for the following reasons:

1) The addition of a right hand solo lane will fill up on the first day that it is built because of traffic apps that promise to keep 680 and PH balanced, at the same efficiency. So looking at the volume of cars on PH Rd exclusive to 680 is pointless. TJKM, hired by the developer, didn't mention the effects of WAZE on the corridor and lacked 680 volume, queue times, and growth projections which effectively mirror our corridor. These are the biggest factors that impact us and we know this primarily by numerous first hand CHP accounts of the high percentages of outside jurisdictional cut-throughers who've had their traffic apps open when they've been pulled over within our corridor. Promoting a a new, single occupant vehicle lane will therefore not be a mitigator to reduce significant impact. **In fact, adding a lane to PH Rd, of what is essentially more 680 solo traffic, will make things significantly worse at PH/Deer Hill.** Please ask yourself if this is in the best interest of NE Lafayette residents, particularly for arguably the largest number of a.m. peak commuters - Lafayette students - who often carpool, take buses, or would only consider biking in protected bike lanes?

2) The reduction of parking spaces on PH Rd from over 15 to 5 for Happy Valley and North Lafayette residents to drop their children off to school, will require more cross traffic to funnel onto Stanley Blvd. and into the high school, creating longer queues.

3) The addition, or lengthening, of an unprotected bike lane, that must cross more lanes of traffic, won't attract any new bike ridership. Please ask yourself, "would I ride there?"

4) The idea that light changing technology, provided to emergency responders, will allow them access to respond during

a peak emergency is absurd, unless that technology includes wings for their vehicles.

5) Any egress, ingress and medians built for this project, that further restrict *future* chances for thoughtful and well conceived *multimodal* design, is rushed and irresponsible.

6) Agreeing to mass construction, across from a learning environment, without considering noise impacts that may effect concentration levels is rushed and irresponsible.

7) A plan that strips away all ability for more parking to be constructed on the only available land next to a high school, that will certainly incur higher growth numbers with the addition of city-wide high density, is rushed and irresponsible.

Nothing should be built at this intersection until Lafayette and SWAT harness the will to seek expert and state-of-the-art advice on how to promote safety and ***multimodal*** efficiency at various places on this corridor.

Further, the Gateway Restraint Policy, a policy designed for Lamorinda residents to be able to move about their city without being constrained, *is already leaving out the entirety of NE Lafayette residents*. Lafayette City has never seen to it that the constraint is north of Rancho View with a proper blinking metering light. It's concerning on #3 on Page 5 of this LPMC agenda that staff would consider heavier light metering at Rancho View ***as a mitigation for Obrien's project, but not out of fairness to keep yesterday's and today's constraint north of the city.***

More concerning, is that after years of leaving NE Lafayette residents out of the Gateway Policy, anyone would actually

promote a change the policy to encourage more lanes of traffic, but at zero net efficiency.

Even more concerning are the various letters by Lamorinda School bus, Superintendents and Principals of Lafayette and Acalanes schools, **Fire Chief Carmen** all included in this PDF document:

...as well as hundreds of letters from the public expressing concerns over traffic: mainly emergency response times and student access to schools that are already significantly jeopardized.

We are in this predicament with O'Brien because of a 2010 failure by a self-admitted-pro-density-city manager, to finish the paperwork necessary to rezone this property to 1 home every 5 acres, as residents and Council had overwhelmingly and enthusiastically agreed to.

We are in this predicament because Lafayette has failed to take even the slightest steps to find multimodal solutions for its portion of the corridor and wants to forge ahead with development ahead of holistic road design and support.

We are in this predicament because of Lafayette's and County's inability to see the benefits of minimizing the illogical and outdated boundaries that plague and zigzag our corridor.

We are in this predicament because this corridor is decidedly at the intersection of three different County Supervisors: Mitchoff, Andersen, Glover; 4 different cities: Lafayette, Pleasant Hill, Walnut Creek and Martinez, plus unincorporated CCCounty; 2 state senators: Glazer and Dodd; and two transportation entities:

SWAT plus Transpac and NO ONE from any of those entities is prioritizing this or talking to one another.

We are in this predicament because the producers of the Lamorinda Action Plan, in the last few decades, have never jointly and decidedly seen NE Lafayette, particularly all NE Lafayette district students - as part of Lamorinda and as deserving of effective Gateway policies as residents elsewhere in Lamorinda.

Please do not rush to develop homes on PH Rd. Rather, please harness the will to first come up with a holistic plan for our corridor that decidedly makes all Lafayette and Acalanes students and their respective schools, the number one priority within Lafayette territory.





## City of Lafayette Staff Report

---

**Date:** January 11, 2021  
**To:** Lamorinda Program Management Committee  
**From:** Mike Moran, Lafayette Director of Engineering and Public Works, and Greg Wolff, Lafayette Planning Director  
**Subject:** Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette Project

---

### **EXECUTIVE SUMMARY**

If a project generates more than 50 net peak hour vehicle trips, the Lead Agency shall notify the other Lamorinda jurisdictions and the designated staff liaisons for the Lamorinda Program Management Committee (LPMC), so that affected jurisdictions may comment on proposed projects and subsequent environmental documentation. In 2013, Lafayette City staff notified and presented the Terraces of Lafayette project to LPMC. Since it had been several years since that presentation, Lafayette staff orally presented the findings of the updated traffic data and addendum to the original Final Environmental Impact Report (EIR) at LPMC's February 3, 2020, meeting. At that meeting, staff explained that part of the developer's proposed project design was to install a short-link southbound lane on Pleasant Hill Road starting north of Deer Hill Road and terminating at the Highway 24 westbound on-ramp (trap lane), in order to reduce traffic impacts. Staff also explained that adding the lane potentially violates the Gateway Constraint Policy of the Lamorinda Action Plan. Since adding the lane fully reduces the new development traffic in the a.m. peak hour to a less than significant level under the California Environmental Quality Act (CEQA), per a transportation model, and building the development without the lane would violate one of the Multimodal Transportation Service Objectives (MTSOs), staff is asking for an amendment to the Lamorinda Action Plan's Gateway Constraint Policy to allow installation of the trap lane.

**It should be noted that amendment of the Lamorinda Action Plan and allowance of the trap lane is not required in order for development of the approved Terraces of Lafayette Development Project to move forward. The project has been approved either with or without the added lane. If the additional section of roadway is not allowed, then the development would still be built without the traffic mitigation benefit that the lane would provide (Project Variant).**

LPMC has conferred with the Contra Costa Transportation Authority (CCTA) regarding the requested amendment to the Lamorinda Action Plan and has been advised to follow the process in the Growth Management Plan, the same procedures that have been followed for previous plan

updates. A flowchart outlining those procedures has been provided by CCTA and is attached to this report. Per that flowchart, it should be noted the proposed amendment will be escalated to the Southwest Area Transportation Committee (SWAT) regardless of the input from LPMC or the input from the other regional transportation planning committees (RTPCs). The CCTA Board will be making the final decision on whether to amend the Action Plan. LPMC and SWAT are advisory committees making a recommendation to the CCTA Board.

## **RECOMMENDED ACTION**

- 1) LPMC review, provide comments, and distribute the recommended language for amending the Lamorinda Action Plan to all of the regional transportation planning committees (RTPCs) within Contra Costa County for comment. The recommended amendment language is specifically written in Recommended Action 2 below.
- 2) LPMC review, provide comments, and forward the proposed amendment to the Southwest Area Transportation Committee (SWAT) for their review of the request to amend the Lamorinda Action Plan Gateway Constraint Policy for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph, of the Lamorinda Action Plan, 2017) to read:

“The two southbound through lanes on Pleasant Hill Road-Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any through lanes, except short-link segments providing access to SR-24.”

The other details of the gateway constraint policy shall remain unchanged.

- 3) LPMC review, provide comments, and forward the proposed request that SWAT review the request to allow construction of the proposed southbound trap lane.

## **BACKGROUND**

In March 2011, O'Brien Land Company, LLC (Applicant) submitted an application to the City of Lafayette (City) for a multi-family residential project known as the Terraces of Lafayette (the Project). As proposed, the Project consisted of 315 moderate-income apartments in 14 separate buildings (7 three-story; 7 two-story) on a 22.27-acre parcel at the southwest corner of Pleasant Hill Road and Deer Hill Road. The Lafayette City Council certified a Final EIR for the Project in 2013. Later in 2013, the Applicant entered into a Project Alternative Process Agreement with the City which suspended the processing of the 315-unit Terraces Project, pending the review of the lower-density, single-family residential proposal known as the Homes at Deer Hill. This Project Alternative proposed 44 single-family detached residences on the 22.27-acre site, resulting in an average density of two dwellings per acre, and was considered by staff to be more in keeping with Lafayette's semi-rural character.

Following a rezoning that approved the Project Alternative, a citizens group named “Save Lafayette” subsequently filed a referendum seeking to invalidate the Homes at Deer Hill approval and sued the City in 2016. Following the lawsuit and its appeal, the City Council placed Measure L on the June 5, 2018, ballot. Measure L asked residents to vote either “yes” (approve) or “no” (deny) on the Project Alternative. Measure L failed and the approval of the Project Alternative was invalidated. On June 15, 2018, ten days after the June 5 ballot, the Applicant submitted a letter

requesting that the City resume processing the original 315-unit Terraces of Lafayette Project. An addendum to the Final EIR was prepared, and its conclusions relevant to the requested action by the LPMC are outlined in the discussion section below.

Lafayette's City Council determined that the Addendum was adequate under CEQA, made CEQA findings, adopted a statement of overriding considerations, adopted a mitigation monitoring and reporting program (MMRP) for the Project and approved the Project at an appeal hearing that began on August 24, 2020, and concluded on August 25, 2020. In doing so, the City Council upheld the Planning Commission's earlier decision to approve the Project on June 30, 2020.

The LPMC Technical Advisory Committee (TAC), in preparation for this public meeting, reviewed and recommended forwarding this Lamorinda Action Plan amendment item for LPMC to discuss and evaluate.

## **DISCUSSION**

The following is a brief summary of the main transportation impacts/issues of the Addendum and supporting 2020 TJKM Traffic Study that pertain to LPMC:

Pleasant Hill Road & Deer Hill Road/Stanley Boulevard: The Addendum determined that the Proposed Project would not have a significant impact at this intersection under Existing Plus Project conditions, in part because it would include an additional southbound through lane on Pleasant Hill Road that would start just north of Deer Hill Rd and become a trap lane for vehicles entering the on-ramp for WB SR-24. However, the additional lane would conflict with the Lamorinda Action Plan's Gateway Constraint Policy, as discussed further below, and this would be considered a significant impact. The Addendum concluded that the Project Variant (without the additional lane) would result in a significant and unavoidable level of service (LOS) impact at this intersection in the a.m. peak hour under Cumulative (2040) Plus Project conditions.

A key policy of the Lamorinda Action Plan is the Gateway Constraint Policy that controls peak-hour and peak-direction vehicle flows on major roadways leading into the Lamorinda area. The Gateway Constraint Policy is part of the Lamorinda Action Plan's recommended package of goals, goals, policies, objectives, and actions for addressing regional transportation issues within the Lamorinda area, and is not a mitigation measure for environmental impacts under CEQA. The Action Plan includes three gateway constraints: 1) **Pleasant Hill Road**, 2) Camino Pablo-San Pablo Dam Road, and 3) SR 24. Pleasant Hill Road is designated as a "Secondary Route of Regional Significance" that consists of two lanes in each direction from its merge with Taylor Boulevard south to SR 24, with additional turn lanes at most intersections. It is important to note that, to date, Lafayette has allowed the existing physical capacity of Pleasant Hill Road and traffic signal timing to act as the gateway constraints. The Lamorinda Action Plan was most recently updated in September 2017, and the current Lamorinda Action Plan Gateway Constraint Policy specifies:

The two southbound through lanes on Pleasant Hill Road-Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any through lanes, *including short-link segments*, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limit line north of the intersection with Taylor Boulevard. - Lamorinda Action Plan (2017) on page 57 (emphasis added).

The 2013 Final EIR for the Terraces Project identified the addition of a new short-link southbound lane to Pleasant Hill Road along the Project frontage, which had been proposed by the Applicant, as a potential mitigation measure that would reduce an LOS impact identified in the a.m. peak hour without the additional lane to a less than significant level. However, the 2013 Final EIR concluded that the additional southbound lane would conflict with the Gateway Constraint Policy, as specified in the 2009 Lamorinda Action Plan, which called for the investigation of "appropriate mechanisms, including maintaining existing roadway lanes and widths and restrictive signal timing, to discourage use of Pleasant Hill Road as a substitute for freeway travel." The 2013 Final EIR determined that this conflict with the Gateway Constraint Policy would result in the potential mitigation measure having a significant secondary impact.

As described above, and similar to the potential mitigation measure considered in the 2013 Final EIR, when processing of the Project resumed in 2018, the applicant proposed the addition of a new southbound lane on Pleasant Hill Road beginning just north of the Project site's frontage and proceeding southward to become a "trap" lane for the westbound SR 24 freeway on-ramp. The Addendum concluded that the addition of the trap lane would improve traffic conditions on southbound Pleasant Hill Road, and would result in a less-than-significant impact related to LOS at the Deer Hill Road/Stanley Boulevard intersection, unlike the Project Variant, under which this impact would be significant and unavoidable in the a.m. peak hour under Cumulative (2040) Plus Project Variant conditions.

The Addendum also concluded that under Cumulative (2040) Plus Project conditions, the delay index impact in the northbound direction on Pleasant Hill Road in the p.m. peak hour would be significant and unavoidable either with or without the additional southbound "trap" lane. The Addendum concluded that the delay index impact southbound on Pleasant Hill in the a.m. peak hour would be less than significant under the Project with the additional lane, but would be significant and unavoidable under the Project Variant without the additional lane under Cumulative (2040) Plus Project Variant conditions.

The LPMC cannot make a final decision with respect to the Gateway Constraint Policy, but rather will be making a recommendation to CCTA, which will be acting as a responsible agency under CEQA. As a responsible agency, the CCTA can rely upon the Final EIR and Addendum certified by and adopted by the City of Lafayette, as lead agency, for purposes of compliance with the environmental review requirements of CEQA if it approves the proposed amendment to the Gateway Constraint Policy. As explained above, the Final EIR and Addendum analyzed the transportation and circulation impacts, and other environmental impacts, including growth-inducing impacts, that potentially could occur under the proposed Project with the additional lane, as well as the Project Variant without the additional lane, and therefore analyzed the potential impacts of a decision by CCTA to approve the proposed Gateway Constraint Policy amendment. Further, notwithstanding the pendency of litigation by a party other than CCTA challenging the Project's Final EIR and Addendum, those documents must be assumed by the CCTA, as a responsible agency, to comply with CEQA. (Public Resources Code Section 21167.3; 14 Cal Code Regs. Section 15233).

## **NEXT STEPS**

The LPMC and SWAT have already provided comments before the EIR was finalized in 2013, and both were updated in February of 2020 that the Project was working its way through Lafayette's approval process and could return for action to amend the Lamorinda Action Plan if the Project was approved.

Now that the Project has been approved by Lafayette's City Council, the City recognizes one of the vehicle traffic impacts violates the CCTA's MTSOs. This will be true under Cumulative (2040) Plus Project conditions for the northbound Pleasant Hill Road traffic in the p.m. peak travel times (either with or without the southbound trap lane), and for southbound Pleasant Hill Road traffic in the a.m. peak travel times (only if the southbound trap lane is not built). However, the Lamorinda Action Plan states:

*Under adopted CCTA policy, exceedance of an MTSO does not constitute a compliance issue with the Growth Management Program. There is no consequence to local jurisdictions if an MTSO is exceeded over time and not the result of a single project. - Lamorinda Action Plan (Sept. 2017) on page 69*

Since the exceedance of an MTSO is a combination of the impacts of regional growth and the Project, the language in the above excerpt suggests there will not be consequences associated with the action from CCTA. However, peak time delay will likely increase at this already congested location that connects two schools and a freeway on-ramp/off-ramp.

Building the additional lane would conflict with the Gateway Constraint Policy by increasing vehicle capacity along the Pleasant Hill Road corridor, albeit for a brief portion of the roadway. The Addendum identified Mitigation Measure TRAF-22, which must be implemented pursuant to the MMRP, and which requires that the applicant either (a) obtain approval of amendments to the Lamorinda Action Plan such that there is no longer a conflict, obtain approval of an exception to the Gateway Constraint Policy for the Project's proposed additional southbound through lane, or obtain a determination that the proposed additional through lane does not conflict with the Gateway Constraint Policy, by LPMC, SWAT, and the CCTA Board, or (b) proceed with the Project Variant, which would not include the additional southbound through lane. Unlike a General Plan policy conflict, the City does not solely control the ability to amend the Gateway Constraint Policy. Amendment of the Policy, or obtaining an exception or a determination as described above, requires the City and the applicant to work with the other jurisdictions that comprise the LPMC, RTPCs, and CCTA.

The main goal of the Gateway Constraint Policy is to dis-incentivize vehicles from using local roads and to keep them on the freeway system. If the trap lane is built, it will slightly improve flow for southbound Pleasant Hill Road during peak travel times. As a possible strategy to control traffic flow, the City can adjust the signal timing on Pleasant Hill Road at Rancho View Dr. and the subsequent four signals before WB SR-24 to keep it at current travel times. This scenario allows traffic to be constrained at the entrance and throughout the Pleasant Hill Road corridor even though a short-segment trap lane would be added at the exit of the corridor.

Staff recommends LPMC forward to SWAT the proposed amendment to the Lamorinda Action Plan, which would allow the trap lane to be built, because the installation of the trap lane:


1. Will mitigate the impacts of traffic from the approved Terraces Project for southbound Pleasant Hill Road during a.m. peak travel times.
2. May help reduce oversaturated traffic conditions at the intersection of Pleasant Hill Road at Deer Hill Road/Stanley Boulevard while still constraining or metering traffic entering the City from the north with signal timing.
3. Will provide additional capacity to evacuate residents throughout the Pleasant Hill Road corridor in the event of an emergency.

While the developer proposed adding the southbound trap lane to mitigate additional traffic from the Project, staff believes that the additional capacity for evacuating the corridor via southbound Pleasant Hill Road toward SR 24 may be the most compelling reason to allow the trap lane to be built. During public hearings, both the Planning Commissioners and City Council members heard numerous public commenters express concern with evacuation procedures and limited road capacity should the Pleasant Hill Road corridor area need to be evacuated during a fire or any other emergency. Although many commenters were expressing this concern as a reason to deny the Terraces Project, a supplemental analysis prepared by TJKM at the request of some of the Planning Commissioners demonstrated that the new through lane would reduce evacuation times to SR 24.

## **ATTACHMENTS**

1. CCTA Growth Management Program (GMP) Action Plan Update Process Flowchart
2. Terraces of Lafayette Site Plan – Annotated
3. [Lamorinda Action Plan](#)
4. [Traffic Impact Study Report – Terraces of Lafayette](#)
5. [Addendum to the Terraces of Lafayette Environmental Impact Report \(May 2020\)](#)  
Including:
  - [Appendix A – On-site Structures Survey & Demolition Permit](#)
  - [Appendix B – Biological Resources](#)
  - [Appendix C – Air Quality & Greenhouse Gas Technical Assessment](#)
  - Appendix D – Traffic Impact Study (*see Item 4, above*)
  - [Appendix E – Geotechnical Study](#)
  - [Appendix F – Noise Collection Data & Analysis](#)
6. [Revisions to the Addendum to the Terraces of Lafayette Environmental Impact Report \(June 22, 2020\)](#)
7. [Terraces of Lafayette Mitigation Monitoring and Reporting Program](#)
8. [TJKM Memorandum on TIS Data Sets and Evacuation Modeling \(June 22, 2020\)](#)

# CCTA Growth Management Program (GMP) Action Plan Update Process

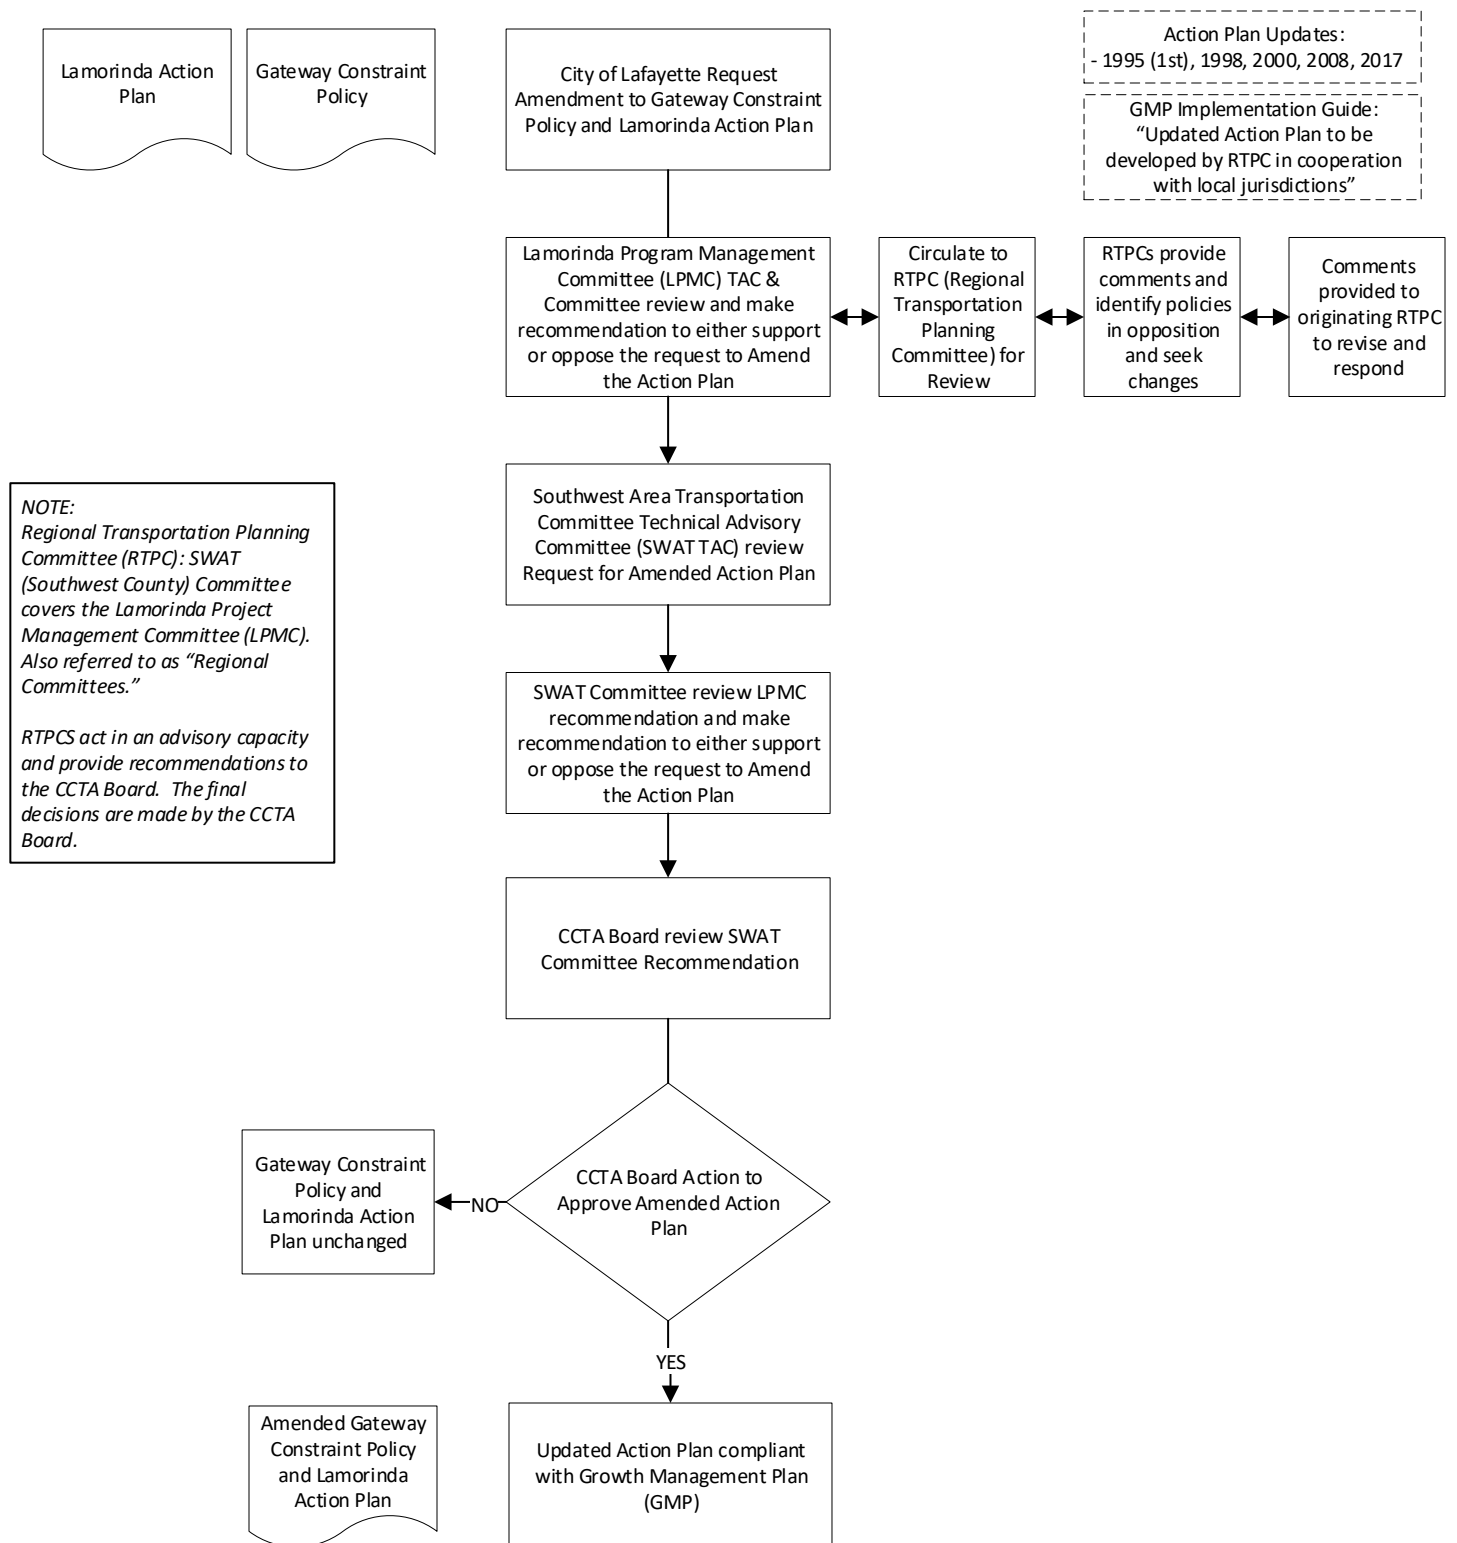



Left turn-in prohibited;  
outbound refuge  
lane added

Original 2011  
Proposal driveway

Driveway moved ±80'  
west for stacking  
of left turns onto  
Pleasant Hill Rd.

Refined site plan to minimize  
impact to natural drainage:  
fill at creek eliminated; bridge  
crossing of creek added; and  
parking area reconfigured

New left turn  
pocket

New right turn lane  
(former S/U TRAF-1)

Expanded loading and  
bus turn-out area

Right-in/right-out access;  
Removal of median break  
(former S/U TRAF-11)

Extended left-turn pocket  
(former S/U TRAF-1)

New freeway trap lane  
(former S/U TRAF-11  
and TRAF-13)

Bike lane extended  
from Deer Hill to  
on-ramp

New 10-foot wide  
multi-use trail

Driveway moved  
±100' west



Original 2011  
Proposal driveway

Internal walkway  
added

Incorporation of 2.1  
acres of Native Blue  
Wildrye Grassland  
(former S/U impact  
BIO-5)

- Pedestrian improvements
- Grassland mitigation
- Left-turn improvements
- Right-turn improvements
- Freeway "trap lane"
- Bicycle lane
- Bus/turn-out traffic

## Annotated Site Plan, June 2019

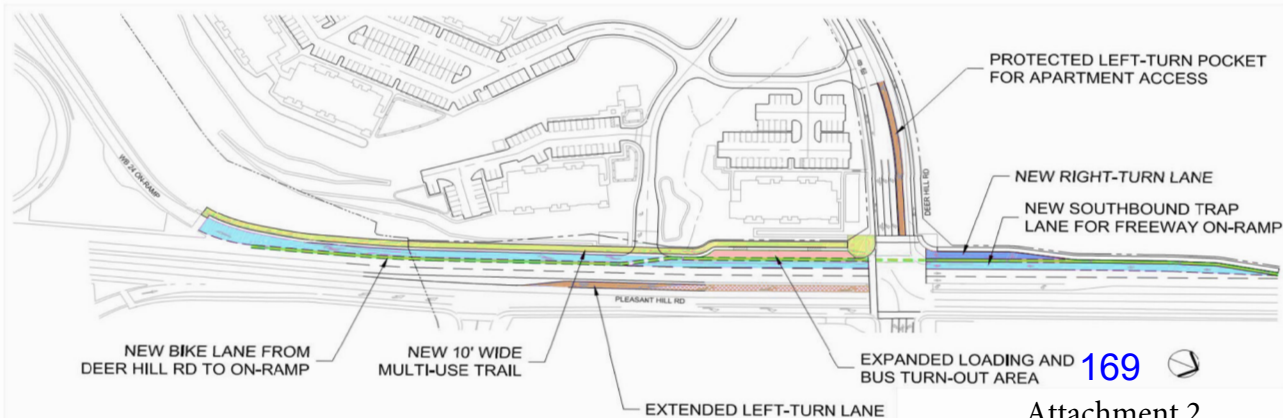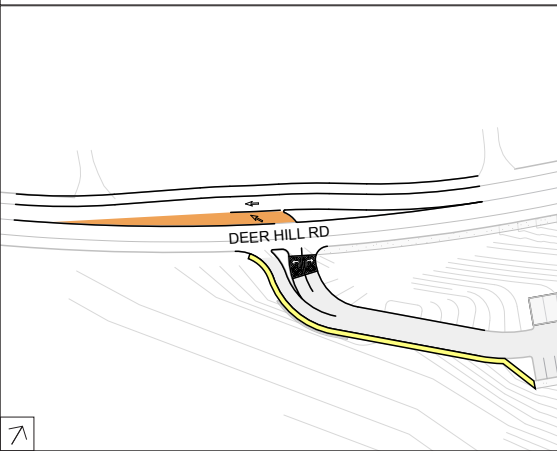



**Lamorinda Program Management Committee (LPMC) Meeting  
– January 11, 2021**

**Communication Received from the Public as of December 7,  
2020**

## Jason Chen

---

**From:** Kristen Altbaum <altbaum@icloud.com>  
**Sent:** Friday, December 4, 2020 1:35 PM  
**To:** Robbins, Joanne; Matt Kelly; riwasaki@ccta.net; Jason Chen; Bobadilla, Lisa; Amaral, Darlene; supervisorandersen@bos.cccounty.us; supervisormitchoff@bos.cccounty.us  
**Subject:** Massive Constituent mistrust of the CCTA/LPMC/SWAT will occur over faulty Gateway Policy changes - Focus and Meaningful policy changes needed NOW

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

CCTA, Joanne, LPMC,

Joanne, Please send to transportation, staff, and Council,

**REGARDING: proposed *faulty* Gateway Policy change for Pleasant Hill Rd, Lafayette will lead to major constituent mistrust of our County's highest transportation staff**

This letter urges LPMC to DENY the faulty gateway policy change intended to promote construction of a solo commuter turn lane that TJMK said "will not translate to higher throughput for the southbound through movement at this point" per the Pleasant Hill Rd corridor study in

2017 [https://link.edgepilot.com/s/1515bf87/cEi8Yx3q70GdvxH1t\\_IS4A?u=https://www.lovelafayette.org/home/showdocument?id=3995%26fbclid=IwAR3SS39GJmflhc2xfcpsykIB9dAEcgW9G4BQZvOs3NJPtJ9AbozzU4GS340](https://link.edgepilot.com/s/1515bf87/cEi8Yx3q70GdvxH1t_IS4A?u=https://www.lovelafayette.org/home/showdocument?id=3995%26fbclid=IwAR3SS39GJmflhc2xfcpsykIB9dAEcgW9G4BQZvOs3NJPtJ9AbozzU4GS340) and was only promoted by TJKM once they were hired by the developer to prove his project had insignificant effects at the intersection. TJKM is deemed biased and untrustworthy by constituents for multiple reasons.

*Gaining LPMC's approval is the developer's tactic to further his case in court against the citizen action group Save Lafayette. LPMC's approval, PRIOR to the courts deciding the legality of this project 1) makes LMPC appear to be representatives of the developer, versus constituents, and 2) is reckless in promoting infrastructure that will be useless for efficiency and dangerous for the safety of commuters and pedestrians.*

LPMC is urged to consider the following recommendations:

STEP ONE:

Decide NOTHING until the courts have made its decision and appeals have been exhausted.

STEP TWO:

After the courts approve OR deny this project, change the Gateway Policy to reflect meaningful infrastructure improvements that will actually aid peak commuter efficiency, including for students who already have much difficulty getting to local schools (sometimes 45 minutes over 3 miles - Lafayette has ample evidence of this) and promote safety.

Per <https://link.edgepilot.com/s/3d47911b/qg3L7yLGoUe2r8vQqcXnLw?u=https://nacto.org/>, this is achieved by:

1) promoting a carpool/bus only lane for the 30 minutes to 1 hour before school. Most students get to school by bus/carpool; and jurisdictions should provide lane incentives to get commuters to carpool and take buses - this achieves efficiency without inviting more solo traffic from 680

2) promoting SAFE/PROTECTED bike and pedestrian lanes - O'Brien's proposed bike lanes are deadly - and completely need to be re-conceptualized BEFORE precious resources are spent.

3) understanding WAZE effects on this corridor: Building more SOLO short segment or turn lanes - OPENING CAPACITY - will encourage MORE solo commuters - *via traffic app algorithms* - to bypass the freeway and use PH Rd., which actually *negates intended efficiency and causes significant delays for both local N.E. Lafayette residents and Pleasant Hill residents who buffer this corridor. It also creates hazardous/boxed in conditions during emergencies.*

4) promote pedestrian bridges (if the project is approved by the courts). Currently, few pedestrians need to cross at this intersection:

315 units will potentially add a minimum of a few hundred kids to crosswalks that are currently unused (across Deer Hill to Springhill elementary); or barely used (across PH Rd to the Shell Station). **The effects of these added Terraces student pedestrians were admittedly NOT studied by TJKM and will cause additional, significant delays to an already grade F intersection.** Do you want all of these new students walking next to *more* lanes of solo traffic that YOU approve? Do you want more lanes of solo traffic across from a high school? 44,000 cars per day use this corridor. Do you want to encourage MORE cars to bypass 680 in favor of our local corridor and home to two schools?

**Approval of this lane via a change to the Gateway Policy is reckless and is only being promoted to appease the developer.**

**Please do your due diligence and support meaningful gateway policies and meaningful infrastructure to keep our county moving and our students safe. We count on you to achieve this outcome and will only support CCTA objectives if the bureaucracy underneath it supports us. There are 20,000 of us who use this corridor and one developer outside your county jurisdiction - you decide who's support is more important to YOUR objectives. I will be educating voters to your decision. If you want to pass additional taxes on to residents of your county, we won't support you if we don't trust you. Aiding developers at the expense of voters does not help your cause.**

Sincerely,

Kristen Altbaum

NE Lafayette resident who has studied and advocated for meaningful efficiency and safety for students since 2016.

925-285-8309

<https://link.edgepilot.com/s/a046b63a/2HUKx6KaYE6jjx4S9TYGsQ?u=https://www.facebook.com/groups/1753415531541790> **Lafayette for School and Evacuation Routes**

Public group

.

397 members

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

## Jason Chen

---

**From:** Kristen Altbaum <altbaum@icloud.com>  
**Sent:** Friday, December 4, 2020 12:05 PM  
**To:** Jason Chen  
**Subject:** Re: LPMC 3rd lane mitigation - please deny

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

REGARDING: Gateway Policy change for Pleasant Hill Rd, Lafayette

LPMC,

Happy holidays.

This letter urges you to DENY the construction of a solo commuter turn lane that TJMK said "will not translate to higher throughput for the southbound through movement at this point" per the Pleasant Hill Rd corridor study in

2017 <https://link.edgepilot.com/s/a5f85d11/CeRAzI4ydUiuLx64U2KCAQ?u=https://www.lovelafayette.org/home/showdocument?id=3995%26fbclid=IwAR3SS39GJmflhc2xfcddykIB9dAEcgW9G4BQZvOs3NJPtJ9AbozzU4GS340> and was only promoted by TJKM once they were hired by the developer.

*Gaining your approval is the developer's tactic to further his case in court against the citizen action group Save Lafayette. Your approval, PRIOR to the courts deciding the legality of this project, makes you a representative of the developer versus constituents and is reckless in promoting infrastructure that will be useless for efficiency and dangerous for the safety of commuters and pedestrians.*

Please consider the following recommendations:

STEP ONE:

Decide NOTHING until the courts have made its decision and appeals have been exhausted.

STEP TWO:

After the courts approve OR deny this project, change the Gateway Policy to reflect meaningful infrastructure improvements that will actually aid peak commuter efficiency, including for students who already have much difficulty getting to local schools (sometimes 45 minutes over 3 miles - Lafayette has ample evidence of this) and promote safety.

Per [https://link.edgepilot.com/s/8e55002d/AgLE4g-Wck\\_jYHTR6VnNtA?u=https://nacto.org/](https://link.edgepilot.com/s/8e55002d/AgLE4g-Wck_jYHTR6VnNtA?u=https://nacto.org/), this is achieved by:

1) promoting a carpool/bus only lane for the 30 minutes to 1 hour before school. Most students get to school by bus/carpool; and jurisdictions should provide lane incentives to get commuters to carpool and take buses - this achieves efficiency without inviting more solo traffic from 680

2) promoting SAFE/PROTECTED bike and pedestrian lanes - O'Brien's proposed bike lanes are deadly - and completely need to be re-evaluated BEFORE precious resources are spent.

3) understanding WAZE effects on this corridor: Building more SOLO short segment or turn lanes - OPENING CAPACITY - will encourage MORE solo commuters - *via traffic app algorithms* - to bypass the freeway and use PH Rd., which actually ***negates intended efficiency and causes significant delays for local residents. It also creates hazardous/boxed in conditions during emergencies.***

4) promote pedestrian bridges (if the project is approved by the courts). Currently, few pedestrians need to cross at this intersection:

315 units will potentially add a few hundred kids to crosswalks that are currently unused (across Deer Hill to Springhill elementary); or barely used (across PH Rd to the Shell Station). The effects of these added Terraces student pedestrians were admittedly **NOT** studied by TJKM. Do you want all of these new students walking next to more lanes of solo traffic that YOU approve? Do you want more lanes of solo traffic across from a high school? 44,000 cars per day use this corridor. Do you want to encourage MORE cars to bypass 680 in favor of our local corridor and home to two schools?

Approval of this lane is reckless and is only being promoting to appease a developer.

Please do your due diligence and support meaningful gateway policies and meaningful infrastructure to keep our County moving and our students safe. We count on you to achieve this outcome.

Thanks,

Kristen Altbaum

NE Lafayette resident who has studied and advocated for meaningful efficiency and safety for students since 2016.

925-285-8309

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.

## Jason Chen

---

**From:** Roger Chili <rchili@hotmail.com>  
**Sent:** Saturday, December 5, 2020 12:55 PM  
**To:** mkelly@ccta.net; Jason Chen; supervisorandersen@bos.cccounty.us; supervisormitchoff@ccccounty.us; lbobadilla@sanramon.ca.gov; damaral@sanramon.ca.gov; riwasaki@ccta.net  
**Cc:** district5@bos.cccounty.us  
**Subject:** LPMC Meeting 12/7

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

LPMC and CCTA,

I strongly urge you to DENY the gateway policy change intended to add a right turn lane on Pleasant Hill Road, turning right onto Deerhill Rd, the subject of Monday's meeting.

As a resident of NE Lafayette, I have advocated for traffic improvements along the Pleasant Hill Corridor for a few years, and I am certain that this right turn lane will:

- 1) Not improve traffic flows in this corridor...in fact, it will lead to more traffic as I will explain below, and
- 2) Most importantly, this turn lane will **LIKELY** result in car vs. pedestrian collisions, injuries and possibly deaths, I will also explain below.

Residents of NE Lafayette have advocated, for years, for traffic improvements along the Pleasant Hill Corridor. We learned, in today's world of WAZE, GoogleMaps, etc., improvements to this particular intersection will not any meaningful benefit (just as TJKM argued before they we paid by the Terraces developer to have a different view). Any improvements will simply draw more cars to the intersection, not fewer, result=no improvement. For those not familiar with this intersection, the majority of commuters from further north and east of this intersection take Hwy 680 to Hwy 24 to travel to Oakland/SF, etc. Of course, they check their apps, and detour onto Taylor Blvd/Pleasant Hill Road **through Pleasant Hill and Lafayette** if they can save a few minutes. In the past several years, there are literally thousands of additional cars taking this route and it has become very challenging to use in the mornings, taking Lafayette residents 30-45 minutes to get their children to school in the morning, when it used to take 10-15 minutes, and also landlocking and delaying hundreds of residents of Pleasant Hill who have no feasible traffic alternative. **This turn lane will not improve traffic.**

What we have also noticed over the past several years is that drivers, local and out-of-town, get very frustrated with the traffic on this corridor and resort to numerous poor behaviors...crossing double yellow lines to pass traffic, sometimes around stopped school busses, high-rates of speeding when the opportunity presents itself, and outright dangerous behaviors at the intersection of Pleasant Hill and Deerhill. Today, without a Terraces project, there is no pedestrian traffic going across Deerhill toward the elementary school. When the Terraces project is approved, there will be 100-200 students moving from the project to the local elementary school, crossing this intersection, in the peak of the morning commute. Frustrated drivers, looking to turn right onto Deerhill to get the BART station, or beyond, would be turning right directly into the student crossing area after spending 30 minutes in bumper-to-bumper traffic. At that intersection there is already a lot to navigate, including the new bike lanes which none of us even understand. There WILL be an

accident if we encourage a speedier right turn lane at this intersection, please do not greenlight a disaster waiting to happen.

We have also learned that any improvements at/near this intersection must be studied in the scheme of the entire route from Highway 680 onto Pleasant Hill Rd and Hwy 4 through Gregory Lane and Reliez Valley Road through this intersection to be meaningful. One-offs, like this lane suggestion, will not be helpful, it is honestly surprising that a traffic consultant would make such a suggestion, and that the city would support it...when we initially engaged with the City of Lafayette on our traffic challenges we too thought that a turn lane would be helpful, but the city's traffic engineers and staff were firmly opposed, tauting a TJKM study as supporting their position. Nothing has changed here except for money and politics, I encourage you not to take the bait, and I would absolutely delighted to take any of you on a drive through the area and neighborhoods to explain how this really looks and plays out once we are post-covid and why this lane is such a bad idea.

I appreciate your leadership.

Thank you,  
Roger C



## Jason Chen

---

**From:** Richard Drury <richard@lozeaudrury.com>  
**Sent:** Sunday, December 6, 2020 5:41 PM  
**To:** Jason Chen; lbobadilla@sanramon.ca.gov; damaral@sanramon.ca.gov  
**Cc:** Laurel Stanley; Mike Griffiths; Scott Sommer  
**Subject:** Opposition to Amendment to Gateway Constraint Policy  
**Attachments:** 2020.12.07.LPMC Letter-Gateway Constraint Amendment.pdf

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

Lamorinda Program Management Committee (LPMC):

Attached please find the comments of Save Lafayette opposing the proposed amendment to the Gateway Constraint Policy. The attached comments concern the proposed Amendment ("Amendment") to the Southwest Area Transportation Committee (SWAT) for Request to Amend the Lamorinda Action Plan Gateway Constraint Policy (GCP) for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph of Lamorinda Action Plan, 2017). This matter will be considered on December 7, 2020 as Agenda Item 6. We urge the LPMC to decline to consider this proposed Amendment until after it has been reviewed under the California Environmental Quality Act ("CEQA"), Pub. Res. Code section 21000. The Amendment is a discretionary action that may have significant adverse environmental impacts. Therefore CEQA review is required before any decision can be made on the Amendment.

Richard Drury  
Counsel for Save Lafayette

--

Richard Drury  
Lozeau Drury LLP  
1939 Harrison Street, Suite 150  
Oakland, CA 94612  
(510) 836-4200  
[richard@lozeaudrury.com](mailto:richard@lozeaudrury.com)



T 510.836.4200  
F 510.836.4205

1939 Harrison Street, Ste. 150  
Oakland, CA 94612

[www.lozeaudrury.com](http://www.lozeaudrury.com)  
[richard@lozeaudrury.com](mailto:richard@lozeaudrury.com)

BY E-MAIL ONLY

December 7, 2020

Lamorinda Program Management Committee  
c/o Jason Chen  
Orinda City Hall  
22 Orinda Way  
Orinda, CA 94563  
e-mail: [JChen@cityoforinda.org](mailto:JChen@cityoforinda.org)

**Re: Opposition to Proposed Amendment to Southwest Area Transportation Committee (SWAT) for Request to Amend the Lamorinda Action Plan Gateway Constraint Policy for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph of Lamorinda Action Plan, 2017). Request for CEQA Review.**

Lamorinda Program Management Committee (LPMC):

I am writing on behalf of Save Lafayette, a non-profit organization composed of residents living in and around the City of Lafayette ("City") concerning the proposed Amendment ("Amendment") to the Southwest Area Transportation Committee (SWAT) for Request to Amend the Lamorinda Action Plan Gateway Constraint Policy (GCP) for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph of Lamorinda Action Plan, 2017). This matter will be considered on December 7, 2020 as Agenda Item 6. We urge the LPMC to decline to consider this proposed Amendment until after it has been reviewed under the California Environmental Quality Act ("CEQA"), Pub. Res. Code section 21000. The Amendment is a discretionary action that may have significant adverse environmental impacts. Therefore CEQA review is required before any decision can be made on the Amendment.

**A. Proposed Amendment.**

The proposal is to amend the GCP to state:

The two southbound through lanes on Pleasant Hill Road – Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any through lanes, except short-link segments providing access to SR-24.

The stated purpose of this amendment is to "allow construction of the proposed southbound trap lane" on Pleasant Hill Road. This trap lane would violate the Gateway Constraint Policy as currently written and adopted.

## **B. Gateway Constraint Policy.**

The Lamorinda Action Plan Update explains that the Gateway Constraint Policy was adopted to limit growth and growth-inducing impacts in the Lamorinda area. (Dec. 12, 2008). The Action plan explains at page 27:

5.3 Proposed Gateway Constraint Policy. A key new strategy proposed in this Action Plan for Lamorinda, is to adopt a “gateway constraint” policy that controls peak-hour, peak-direction vehicle flows on major roadways leading into Lamorinda. Such a policy, if adopted, would set maximum lane widths for SR 24 inbound gateways, and similarly, would identify limits on number of lanes for arterials, such as Pleasant Hill Road and Camino Pablo. Initial evaluation indicates that adoption of a Gateway Constraint policy could be beneficial to Lamorinda residents, because such a policy would reserve some room on the regional system, so that access to the system will be maintained for traffic that has an origin and/or destination in Lamorinda. Furthermore, the modeling analysis indicates that adoption of a Gateway Constraint policy may be the key to achieving the MTSOs for Lamorinda. The south county jurisdictions of SWAT (Danville, San Ramon, and Contra Costa County) have a Gateway Constraint policy that has been in place since 1995, when the first Tri-Valley Transportation Plan/Action Plan was adopted. The policy has been successfully implemented through the TVTC, whose Contra Costa jurisdictions fall under the purview of SWAT as the designated RTPC under Measure C/J. The gateway constraint policies of the Tri-Valley Action Plan are available for review in the Draft Tri-Valley Action Plan, issued February 26 by TVTC.

Pleasant Hill Road: The two southbound through lanes on Pleasant Hill Road–Taylor Boulevard are proposed as a Gateway Constraint (Location to be Determined). Pleasant Hill Road is two lanes in each direction from its merge with Taylor Boulevard south to SR 24 with additional turn lanes at most intersections. The first signalized intersection south of the Pleasant Hill Road-Taylor Boulevard merge is at the “T” intersection with Rancho View Drive. Other major intersections are at Green Valley Road, Reliez Valley Road, Spring Hill Road and Stanley Road/Deer Hill Road. Each of these signalized intersections has left- and right-turn lanes on Pleasant Hill Road. The capacity constraints on arterials providing access to the Lamorinda area are determined by the number of lanes and the timing of signals at intersections near the entry point. On Pleasant Hill Road southbound during the AM peak period, capacity is determined primarily by the timing of signals at the four major intersections and how much green time is given to Pleasant Hill Road. While the gateway policy addresses physical characteristics at key intersections, the timing of signals can also act as a metering point, as discussed below in the Traffic Management strategy section. (p.28).

### **C. The Proposed Amendment is Subject to CEQA.**

CEQA review is required for all discretionary “projects” that may have significant environmental impacts. The California Environmental Quality Act, Pub. Res. Code § 21000 et seq., applies to agency projects that may have an adverse environmental impact. (*Friends of Mammoth v. Board of Supervisors*, 8 Cal.3d 247, 259 (1972); *Friends of B Street v. City of Hayward*, 106 Cal.App.3d 988, 1003 (1980) (project that included removal of trees caused significant effect on environment).)

#### **1. The GCP Amendment is Discretionary.**

There is no question that the Amendment is discretionary since the LPMC is not required to Amend the GCP. CEQA applies to discretionary projects and approvals. (§ 21080, subds. (a), (b)(1); Guideline § 15268, subd. (a); *Health First v. March Joint Powers Authority* (2009) 174 Cal.App.4th 1135, 1142-1143 [96 Cal. Rptr. 3d 290].) “The statutory distinction between discretionary and purely ministerial projects implicitly recognizes that unless a public agency can shape the project in a way that would respond to concerns raised in an EIR, or its functional equivalent, environmental review would be a meaningless exercise.” (*Mountain Lion Foundation v. Fish & Game Com.* (1997) 16 Cal.4th 105.)

The CEQA Guidelines describe “discretionary” projects as those requiring “the exercise of judgment or deliberation when the public agency or body decides to approve or disapprove a particular activity, as distinguished from situations where the public agency or body merely has to determine whether there has been conformity with applicable statutes, ordinances, or regulations.” (Guidelines, § 15357.) Like the Guidelines, case law describes a decision as discretionary when it involves relatively personal decisions addressed to the sound judgment and enlightened choice of the administrator. (*People v. Department of Housing & Community Dev.* (1975) 45 Cal.App.3d 185, 193; see also, e.g., *Citizens for Non-Toxic Pest Control v. Department of Food & Agriculture* (1986) 187 Cal.App.3d 1575, 1583 [decision discretionary where agency determined whether pest could be eradicated “and what method would be most effective in doing so”].)

Since the LPMC is not required to adopt the Amendment, it is a discretionary action.

#### **2. The GCP Amendment is a “Project.”**

Under CEQA, the term “project” includes the “issuance of rules, regulations, plans, or other general criteria.” (14 CCR §15168(a)(3); *Bozung v. Local Agency Formation Comm’n* (1975) 13 Cal.3d 263, 277-279; *Dunn-Edwards v. BAAQMD*, 9 Cal.App.4th at 658-659.) The courts have held that CEQA applies to the promulgation of regulations unless there is some basis to find the agency exempt. (Pub. Resources Code §§ 21000 (g), 21001(f)&(g), 21092, 21106; 14 Cal. Code Regs. §15168(a)(3); *Wildlife Alive v. Chickering* (1976) 18 Cal.3d 190, 195.).

Under CEQA, a “project” includes “an essential step leading to ultimate environmental impact.” (*Kaufman & Broad-South Bay, Inc. v. Morgan Hill* (1992) 9 Cal.App.4th 464, 473.) “Agency action is not exempt from CEQA simply because it will not have an immediate or direct effect on the environment. CEQA applies if it is reasonably foreseeable that environmental impacts will ultimately result.” (Kostka & Zischke, *Practice Under the California Environmental Quality Act* (CEB 1993), § 4.20, p. 151, citing *Bozung v. LAFCO* (1975) 13 Cal.3d 263, 277.) “If an agency’s action is a necessary step that starts in motion a chain of events that will foreseeably result in impacts to the physical environment, the activity must be treated as a project subject to CEQA.” (*Id.*; see also *Friends of Mammoth v. Board of Supervisors of Mono County* (1972) 8 Cal.3d 247, 265 (holding that the term “project” includes not only activities directly involving actual physical impacts on the environment, but also activities, such as the approval of permits, whose environmental effects are indirect).)

The stated reason for the Amendment is to “allow construction of the proposed southbound trap lane” on Pleasant Hill Road. Thus, the Amendment is a “project” within the meaning of CEQA.

### **3. The Amendment May Have Significant Adverse Environmental Impacts.**

Elite Transportation Group (ETG) has determined that the southbound trap lane will have significant adverse impacts on levels of service on Pleasant Hill Road and several area intersections. (Exhibit A).

Also, as of July 1, 2020, CEQA requires traffic impacts to be analyzed using vehicle miles travelled (VMT) analysis. CEQA Guidelines section 15064.3. No such analysis has been conducted for the Amendment. However, it is likely that the southbound trap lane will result in an increase in VMT by encouraging more long-range commuting by automobile. The burden is on the agency to conduct the required analysis using the legally required methodology. Failure of the agency to conduct this analysis “enlarges the scope of the fair argument.” “[U]nder CEQA, the lead agency bears a burden to investigate potential environmental impacts. ‘If the local agency has failed to study an area of possible environmental impact, a fair argument may be based on the limited facts in the record. Deficiencies in the record may actually enlarge the scope of fair argument by lending a logical plausibility to a wider range of inferences.’” (*Sundstrom v. County of Mendocino* (1988) 202 Cal. App. 3d 296, 311.) *County Sanitation Dist. No. 2 v. County of Kern* (2005) 127 Cal. App. 4th 1544). The impact of the southbound trap lane has not been analyzed in any environmental impact report or negative declaration.

The southbound trap lane will have growth-inducing impacts. CEQA requires that a CEQA document must include a detailed statement setting forth the growth-inducing impacts of a proposed project. Pub. Res. Code Section 21100(b)(5). A proposed project is either directly or indirectly growth inducing if it: (1) fosters economic or population growth or requires additional housing; (2) removes obstacles to growth; (3) taxes community services or facilities to such an extent that new services or facilities would be necessary; or (4) encourages or facilitates other activities that cause significant

environmental effects. CEQA Guidelines Section 15126.2(d). While growth inducing impacts of a project need not be labeled as adverse, the secondary impacts of growth (e.g., traffic, air pollution, etc.) may be significant and adverse. In such cases, the secondary impacts of growth inducement must be disclosed as significant secondary or indirect impacts of the project. The analysis required is similar in some respects to the analysis required to analyze impacts associated with population and housing. The clear purpose of the southbound trap lane is to “foster population growth” and “remove obstacles to growth.” As such, it will have growth-inducing impacts that must be analyzed in a CEQA document.

#### **4. The Amendment Abandons a Mitigation Measure Imposed by the GCP and Therefore Requires CEQA Review.**

The Amendment removes a mitigation measure imposed by the Gateway Constraints Policy intended to limit growth. As such, it has adverse environmental impacts by definition that must be analyzed under CEQA.

If the agency fails to implement mitigation measures required by a prior EIR, this requires CEQA review, even for an otherwise ministerial project. *Katzeff v. Dept. of Forestry* (2010) 181 Cal.App.4<sup>th</sup> 601, 611, 614; *Lincoln Place Tenants v. City of Los Angeles* (2005) 130 Cal.App.4<sup>th</sup> 1491, 1507-1508. The purpose of this requirement “is to ensure that feasible mitigation measures will actually be implemented as a condition of development, and not merely adopted and then neglected or disregarded.” *Federation of Hillside and Canyon Associations v. City of Los Angeles* (2000) 83 Cal.App.4<sup>th</sup> 1252, 1260-1261. The decision to abandon an adopted mitigation measure is a discretionary decision.

An agency fails proceed in a manner required by law when it fails to comply with adopted CEQA mitigation measures. *Lincoln Place*, 130 Cal.App.4<sup>th</sup> at 1508, 1510 (“[h]aving placed these conditions . . . the city cannot simply ignore them. Mitigating conditions are not mere expressions of hope . . . [i]n the present case the city failed to proceed according to law . . .”). “[T]his rule is applicable even if one of the smaller parts might require only ministerial, rather than discretionary, approval.” *Katzeff*, 181 Cal.App.4<sup>th</sup> at 611; *Lincoln Place*, 130 Cal.App.4<sup>th</sup> 1491, 1507 n22 (“it cannot be argued CEQA does not apply to the . . . demolition on the ground the demolition permits are ministerial acts.”)

“[T]his rule is applicable even if one of the smaller parts might require only ministerial, rather than discretionary, approval.” *Katzeff*, 181 Cal.App.4<sup>th</sup> at 611. The *Katzeff* Court held at p. 614 “that where a public agency has adopted a mitigation measure for a project, it may not authorize destruction or cancellation of the mitigation – whether or not the approval is ministerial . . .” This same result was reached in *Lincoln Place*, 130 Cal.App.4<sup>th</sup> at 1507 n22, which holds that “it cannot be argued CEQA does not apply to the . . . demolition on the ground the demolition permits are ministerial acts.”

Furthermore, in *Katzeff*, 118 Cal.App.4<sup>th</sup> at 606, the original mitigation conditions were twenty years old. It is the granting of the new permit, ministerial or not, that triggers



the CEQA violation. In *Katzeff*, mitigation conditions from timber harvesting plans dated 1988 and 1998 were at issue. In 2008, real party filed an application to convert the timberland to an orchard. *Id.* at 607. The permit conversion was ministerial, but the Court held that the twenty year old measures must be enforced and stayed real party's project. *Id.* at 615. Otherwise, "any mitigation required by CEQA . . . could be nullified simply by the passage of time . . ." *Id.* at 611. "We see no principled distinction between a conversion exemption sought immediately after the right to harvest under a THP has expired, and one sought a decade later. Whether or not the legal right to harvest timber has expired, the environmental effects are presumed to remain." *Id.* at 612.

In *Lincoln Place*, 130 Cal.App.4<sup>th</sup> at 1498, the original mitigation conditions were at least seven years old. There, the mitigation conditions for a renovation project were in a 1995 EIR. *Id.* In 2002, in connection with "ministerial" building permits, a dispute arose as to whether the mitigation conditions were to be followed. The City said no. *Id.* The Court of Appeal disagreed, and held that the City "failed to proceed according to law" under CEQA by granting the permits absent compliance with the (by then) ten year old mitigation conditions "without stating a legitimate reason for ignoring those measures and without preparing and circulating a supplemental EIR." *Id.* at 1510. The Court issued a permanent injunction against real party's project until the City did so. *Id.*

Thus, if the agency is taking a subsequent action – even if ministerial – it must evaluate previously imposed mitigations which have not been met. In *Katzeff*, 118 Cal.App.4<sup>th</sup> at 614-615, the Court stayed real party's project and ordered that the City revisit the issue to justify its decision on the mitigation. In *Lincoln Place*, 130 Cal.App.4<sup>th</sup> at 1510, the court issued a writ against the City for failing "to proceed according to law" and a permanent injunction against real party's project until the City made new CEQA findings.

Since LPMC is proposing to eliminate a measures that was intended to mitigate growth-inducing impacts, it must first analyze the proposal and its impacts under CEQA.

#### **D. LPMC Already Determined that the Trap Lane Violates the Gateway Constraints Policy.**

In 2013, the LPMC considered an almost identical proposal to "add a third through-lane to the existing two southbound lanes on Pleasant Hill Road in the southbound direction, from north of Deer Hill Road to the State Route 24 westbound onramp." LPMC determined:

It appears from the information presented today that one of the proposed mitigations for the Terraces Project – to widen southbound Pleasant Hill Road from two to three lanes from Deer Hill Road to the westbound SR 24 onramp – is inconsistent with the Gateway Constraints Policy of the adopted Lamorinda Action Plan.

(Exhibit B).


For the same reasons, the LPMC should reject the current proposal which conflicts with the Gateway Constraint Policy for the same reasons.

**E. LPMC Should Not Consider the Proposed Amendment Until the Newly Elected City Council Members are Seated.**

In the November 2020 election, two new members were elected to the Lafayette City Council. It is currently unknown what opinion these newly elected councilmembers will have on the proposed Amendment. However, it seems ill-advised to adopt a hastily proposed Amendment supported by a lame-duck Lafayette City Council when a new City Council has already been elected and will be sworn in in a matter of weeks.

There is certainly no rush to adopt the Amendment. The southbound land that is proposed is designed primarily for the proposed Terraces Project. This Project is currently embroiled in litigation that is only in its initial phases. The Project cannot proceed until that litigation is resolved – if ever. In any case, the decision can certainly wait for the new City Council to be seated.

Sincerely,

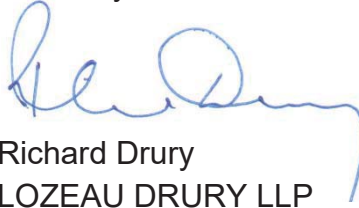

Richard Drury  
LOZEAU DRURY LLP

Cc: "Bobadilla, Lisa" <[lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov)>  
"Amaral, Darlene" <[damaral@sanramon.ca.gov](mailto:damaral@sanramon.ca.gov)>



# EXHIBIT A



# Memorandum

Date: 3/5/2020

To: Michael Griffiths

From: Lin Zhang, PhD, PE, TE, PTOE  
Elite Transportation Group, Inc. (ETG)

Subject: **Peer Review of Updated Traffic Study for the Proposed Terraces of Lafayette Project**

## EXECUTIVE SUMMARY

This memorandum provides a summary of a peer review of the updated traffic impact study prepared by TJKM (hereinafter referred to as **updated traffic study**) for the proposed Terraces of Lafayette Project (hereinafter referred to as **proposed project**). The following areas are identified by Elite Transportation Group, Inc. (ETG) either unmitigable or inadequate:

- It was not clear whether the traffic analysis models used for the queueing and weaving analyses were calibrated to the local traffic condition. The conclusions drawn upon the model results would be questionable if the models were not properly calibrated.
- The proposed project would result in a significant and unavoidable impacts on the level of service at Pleasant Hill Road/Deer Hill Road intersection, as well as delay on Pleasant Hill Road.
- The projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road and SR 24.
- Crossing three lanes for vehicles existing westbound SR 24 off-ramp to access the extended northbound left-turn lane at the intersection of Pleasant Hill Road/Deer Hill Road in this heavily congested short segment (approximately 600 feet only) will not only cause additional delay, but also pose safety risks. However, these impacts were not fully studied or mitigated.
- For a congested and gridlocked arterial such as Pleasant Hill Road during peak hours, installing Emergency vehicle preemption (EVP) would not fully mitigate the impact of the proposed project on emergency response time.
- The net loss of 15 parking spaces on Pleasant Hill Road would result in a significant impact on passenger loading.
- The proposed bicycle lane between Deer Hill Road and SR 24 on-ramp would create major conflict zones between bicycles and passenger-loading vehicles, between bicycles and vehicles in the trap lane, and between bicycles and vehicles entering & existing the property driveway.
- Analysis of impacts to traffic, noise, and pollution was not performed for the massive amount of heavy trucks in the grading stage of construction (approximately 45 heavy truck trips per hour).
- The updated traffic study lacks an analysis to quantify the traffic impact of the proposed project during wildfires and PG&E's power shut-offs. Also, an evacuation plan for the residents inside the Very High Fire Hazard Severity Zones (VHFHSZ) needs to be developed or updated.
- The updated traffic study omitted the analysis of the significant impact of the proposed project on westbound queues at the intersection of Laurel Drive/Deer Hill Road in the AM peak period under the Plus Project scenarios.



## FIELD VISIT

To gain local knowledge of the study area, ETG conducted a field visit along Pleasant Hill Road between Withers Avenue and Old Tunnel Road, and Deer Hill Road between First Street and Pleasant Hill Road on October 22, 2019 (Tuesday), during AM peak, School peak, and PM peak periods.

On Pleasant Hill Road, our observations indicated that it experienced the most congestion in the southbound direction during the AM peak period. The southbound queue in the AM peak period extended as far as 1,500 feet north of Rancho View Drive. In the PM peak period, the northbound Pleasant Hill Road experienced congestion near the intersection at Pleasant Hill Road and Stanley Blvd/Deer Hill Rd, with the longest queue extending about 2,000 feet south of this intersection.

On Deer Hill Road, it was observed that there was an excessive left-turn queue on the westbound approach at the intersection of Deer Hill Road and Laurel Drive in the AM peak period. During the PM peak period, the eastbound Deer Hill Road experienced severe congestion with the longest queue extending more than one mile from the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard.

ETG also conducted several travel time runs during the field visit. **Table 1** lists the average travel times and the delay indices in each peak direction of Pleasant Hill Road between Withers Avenue and Old Tunnel Road (approximately 2.8 miles). Note that the delay indices were calculated using the estimated free-flow travel time from Google Maps. Each average travel time was based on several travel time runs. **Table 1** also lists the Contra Costa Transportation Authority (CCTA) 2017 Multimodal Traffic Service Objectives (MTSO) delay indices, as well as the 2019 projected delay indices calculated by TJKM. The delay indices will be discussed in more detail in the next section.

**Table 1. Travel Time and Delay Index - Pleasant Hill Road**

Direction	Period	Average Travel Time (min)	Free-Flow Travel Time (min)	Delay Index	2017 MTSO Delay Index	2019 Projected (TJKM)
SB	AM Peak	16.4	5.5	2.98	2.4	1.34
NB	School Peak	7.4	5.5	1.35	-	-
NB	PM Peak	11.4	5.5	2.07	2.0	1.74

## PEER REVIEW FINDINGS

### Latest Traffic Data

The updated traffic study collected the turning movement counts at all 17 study intersections on April 30, 2019, and one intersection only at Pleasant Hill Road/Deer Hill Road/Stanley Boulevard on May 2, 2019. The counts at all study intersections were later scaled up based on the day-to-day traffic variation at the Pleasant Hill Road/Deer Hill Road/Stanley Boulevard intersection between April 30 and May 2, 2019, for the analysis.



The typical practice of collecting turning movement counts at an intersection is to collect counts on two midweek days and use the average for analysis. It is not certain that it was a budget constraint that did not allow the new data collection to cover two days at all study intersections. However, scaling up counts to a higher level would result in a more conservative analysis.

For the signal timing data, the updated study used the latest timings at intersections on Pleasant Hill Road provided by the City of Lafayette. However, for other signalized study intersections not on Pleasant Hill Road, default parameters were assumed, instead of using the actual signal timings, for unstated reasons.

### Study Area Coverage

The study area in the updated study remains the same as the 2012 study. Based on our field visit observations, this study area is sufficient for the traffic impact analysis of the proposed Terraces of Lafayette project.

### Analysis Methodologies

ETG evaluated the methodologies used in the updated traffic study, including the following:

- **Traffic Forecast** – The updated study used the latest CCTA Traffic Forecasting Model base year (2018) and future year (2040) outputs to calculate the annual average growth rate. This growth rate was later applied to the adjusted 2019 counts to estimate 2040 traffic. This is a reasonable and common practice.
- **Level of Service (LOS) Analysis** – The updated study used the Highway Capacity Manual (HCM) 2010 methodologies to determine LOS for the study intersections. This is different from the 2012 study that used the HCM 2000 methodologies, but is compliant with CCTA's preference as listed in the CCTA Technical Procedures.
- **Signal Warrant** – The updated study conducted peak hour signal warrant analyses for unsignalized intersections using the 2014 California Manual on Uniform Traffic Control Devices (MUTCD), which is the latest version of the manual. This is a reasonable and common practice.
- **Queuing Analysis** – Similar to the 2012 study, the updated study used the simulation approach to conduct queuing analysis. The simulated 95<sup>th</sup> percentile queue lengths were used to determine whether the existing turn-lanes provide sufficient storage. However, it was not mentioned in the report whether the simulation model was calibrated to the local traffic condition. Model calibration is the process of adjusting model parameters (which initially are defaults) to obtain a model that replicates the existing traffic conditions. Model calibration is critical in that it ensures that a traffic simulation model is able to reproduce the local traffic condition and is proper to use for analyzing alternatives or scenarios. For a corridor study, travel time is the most common performance measure that is used in model calibration. It was not clear from the updated study report if the traffic analysis models were calibrated. If the traffic analysis models were not calibrated, then the models would be unreliable and the conclusions drawn from the analysis would be questionable. TJKM should explain the calibration methods used.
- **Weaving Analysis** – It was concerned that the proposed project would worsen the weaving condition on Pleasant Hill Road between freeway ramps and nearby intersections. The updated study employed a similar simulation approach as used in the 2012 study to evaluate the impact



of the proposed project on weaving activities. However, it was not mentioned in the report whether the simulation model was calibrated to the local traffic condition.

- **Delay Index** – The Delay Index (DI) is an expression of the amount of time required to travel between two points during the peak hour as compared to the free-flow travel time baseline. The delay index is defined as:  $Delay\ Index = \frac{Congested\ Peak-Hour\ Travel\ Time}{Free-Flow\ Travel\ Time}$ . The updated traffic study estimated the 2019 delay indices for Pleasant Hill Road and SR 24 by using the 2013 MTSO monitoring results and growth rates between 2013 and 2019. It was stated in the report that the 2017 MTSO monitoring results for Pleasant Hill Road and SR 24 overestimated the existing delay index, therefore, the 2013 results were used to estimate the 2019 delay index. However, the 2017 MTSO monitoring results were based on INRIX data. INRIX gathers and aggregates data collected from a wide range of anonymous GPS-equipped devices (e.g., smartphones), and thus provides much better coverage of travel time data compared to traditional travel time tach runs (i.e., floating car survey). INRIX data has been validated and recognized as a reliable data source, and has been used by many agencies and organizations nationwide and locally in the Bay Area for congestion monitoring and other traffic-related projects. In addition, our travel time runs on Pleasant Hill Road conducted on October 22, 2019, show that the existing delay indices are higher but close to the 2017 monitoring results (**Table 1**). Therefore, our assessment is that the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road. See below under the heading Impacts on SR 24 for our similar comments on the impacts on Highway 24.

### Trip Generation Calculations

The 2012 study calculated trip generations using the ITE Trip Generation Manual, 8<sup>th</sup> Edition. Since the 10<sup>th</sup> edition of the Manual was published in 2017, the updated traffic study calculated trip generation based on the latest Manual (i.e., 10<sup>th</sup> edition). However, because the new trip generation resulted in fewer trips than the original one in the 2012 study, the updated traffic study used the original trip generation for the analysis. As stated in the report, the proposed project was classified as “Multifamily Housing (Mid-Rise)” according to the latest Manual but was classified as “Apartments” based on the older version of the Manual. The change of land use classification would result in over a 25% reduction in trip generation, although it is unclear how such a change is warranted since we understand that half the buildings are 2-story and half are 3-story. The updated study report included the 10<sup>th</sup> Edition-based trip generation for comparison purposes only, but applied the higher trip generation used in the 2012 study.

We verified and confirmed that the trip generation calculations using both the 8<sup>th</sup> and 10<sup>th</sup> Edition of the Traffic Generation Manual in the updated traffic study report are valid.

### Trip Distribution Assumptions

The updated study retained the trip distribution that was manually estimated in the 2012 study, because “it was determined that the ‘plus project’ model results could not be relied upon”. It was not certain if it was caused by the model not being sensitive to the proposed project.

We reviewed the assumed trip distribution and they are reasonable given the traffic conditions in the study area.



## Assumptions for Future Year Cumulative Scenarios

The future year was set as 2040 in the updated traffic study, which is reasonable and consistent with the future year of the latest CCTA Traffic Forecasting Model. The growth rate used to estimate 2040 traffic was derived based on the CCTA model outputs of the base year and future year. This is a common practice.

## Impacts on Emergency Vehicles

Emergency vehicle preemption (EVP) system was recommended in the original study as the mitigation measure for the impact of the proposed project on emergency response time. Opticom, as one of the widely used EVP equipment in the US, was mentioned in the original study. EVP was retained in the updated traffic study to mitigate the impact on emergency response time.

While EVP enables faster emergency response, congestion and gridlock can prevent emergency vehicles from reaching the preemptive detection range at equipped signalized intersections. The priority logic used in the current EVP equipment (e.g., Opticom) does not consider congested queuing conditions such as the one on Pleasant Hill Road as shown in **Figure 1**. The technique that uses queue-based offset to adjust preemption time is still at the research and development stage, and thus not available to use yet.

**Figure 1. Emergency Vehicle Stuck in Traffic Congestion on Pleasant Hill Road**





Our assessment is that EVP equipment (e.g., Opticom) can help reduce emergency response time under non-congested or slightly-congested traffic conditions. However, for a congested and gridlocked arterial such as Pleasant Hill Road during the peak hours, the impact on emergency response time due to additional congestion caused by the proposed project is unlikely to be fully mitigated by installing EVP equipment. No analysis in the updated traffic report has shown emergency response time reduction by using EVP equipment on Pleasant Hill Road. Therefore, this impact is deemed significant and unavoidable.

### Impacts during Construction

According to the traffic study report, grading on the proposed project site during construction would result in approximately 25,000 to 30,000 haul trips over a nine-month period. The traffic study assumed five-day work weeks, this would result in an average of approximately 150 haul trips per day, for a total of 300 truck trips (150 arriving empty, 150 leaving full) per day. The traffic study report suggested that large trucks should be prohibited during the hours of 7:00 to 9:00 a.m. and 3:00 to 7:00 p.m. on any school day, and 7:00 to 9:00 a.m. and 4:00-7:00 p.m. on any non-school weekday. This would result in six (6) to seven (7) hours per workday for active hauling operations. However, the traffic study report assumed eight (8) hours per workday instead, which resulted in an average of approximately 40 truck trips per hour. Our estimate is an average of approximately 45 truck trips per hour. This large amount of heavy truck traffic during construction will result in not only excessive intersection delay at the intersection of Pleasant Hill Road and Deer Hill Road/Stanley Boulevard, but also new traffic hazards when changing lanes or making wide turns when maneuvering on Pleasant Hill Road and Deer Hill Road. The updated traffic study report recommended to limit truck traffic to off-peak times, but did not analyze the potential impacts. Analysis should have been performed considering the massive amount of heavy trucks in the grading stage of construction (approximately 45 heavy truck trips per hour). The noise and pollution impacts of this amount of truck activity should be analyzed elsewhere in the CEQA analysis.

### Weaving Activities

It was concerned that the proposed project would worsen the weaving condition on Pleasant Hill Road between freeway ramps and nearby intersections, especially when the original design allows full access at the proposed driveway on Pleasant Hill Road. The revised design has prohibited left-turn in/out at this driveway. In addition, the simulation experiments carried out in the updated traffic study show that the additional traffic due to the proposed project has little impact on traffic speeds along this weaving section. However, it was not clear in the updated traffic study report if the simulation models were calibrated to represent the real congestion level on Pleasant Hill Road. If the traffic analysis models were not calibrated, then the models would be unreliable and the conclusions drawn from the analysis would be questionable.

Furthermore, the updated traffic study states that the northbound to westbound left-turn lane at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard will be extended further south. This will result in approximately 600 feet only between the westbound SR 24 to northbound Pleasant Hill Road off-ramp and the extended northbound left-turn lane. Based on the estimated project trip generation, during the PM peak hour, there will be about 30 project-generated vehicles which will have to cross three lanes in order to access the left-turn lane from the off-ramp. Crossing three lanes in this



heavily congested short segment (approximately 600 feet) will not only cause additional delay, but also pose safety risks. However, these impacts were not fully studied or mitigated in the updated traffic study.

### **Impacts on SR 24**

The updated traffic study used delay index to evaluate the impacts of the proposed project on SR 24 between the Caldecott Tunnel and I-680. It was stated in the report that the 2017 MTSO monitoring results for SR 24 overestimated the existing delay index, and therefore the 2013 results were used to estimate the 2019 delay index. As stated earlier, the 2017 MTSO monitoring results were based on INRIX data which has been validated and recognized as a reliable data source. We also performed a quick check using the Google Map peak-period travel times to calculate the delay index, as shown in **Table 2**. It can be seen that the Google Map-based delay indices are similar to the 2017 MTSO delay indices. Our assessment is that the projected delay indices used in the updated traffic study significantly underestimated the congestion level on SR 24.

**Table 2. Travel Time and Delay Index – SR 24**

Direction	Period	Average Travel Time (min)	Free-Flow Travel Time (min)	Delay Index	2017 MTSO Delay Index	2019 Projected (TJKM)
WB	AM Peak	20.3	10	2.03	2.0	1.7
EB	PM Peak	22.9	10	2.29	2.3	1.4

### **Site Access**

As stated in the updated study report, several changes were made in the updated site plan:

- Driveway on Pleasant Hill Road permits only right-turn in/out
- Relocated east driveway on Deer Hill Road permits full access with an exclusive left-turn lane
- Relocated west driveway on Deer Hill Road permits only right-turn in/out and left-turn out with a median refuge lane

Our assessment is that compared to the original design used in the 2012 study, these changes would reduce interruptions to the existing traffic on Pleasant Hill Road and Deer Hill Road. The relocated east driveway on Deer Hill Road is further away from the intersection at Pleasant Hill Road/Deer Hill Road, which would provide more left-turn lane storage and some safety benefits, although allowing left turns out of this driveway could still be problematic given limited visibility, the steepness of Deer Hill Road at this point and the speed and momentum of traffic coming down the hill in off-peak times.

### **Parking Supply inside Development**

The updated study used the same parking requirements by unit size as in the 2012 study. The calculated parking demand is 511 spaces and the updated parking supply is 557 spaces, which is slightly different from the original parking supply of 567 spaces. The conclusion that the project would have a less-than-significant impact on surrounding roadways since parking supply inside the development is sufficient.

### **Passenger Loading and On-Street Parking**



As stated in the updated traffic study report, the proposed project would remove 19 on-street parking spaces along Pleasant Hill Road south of Deer Hill Road. These parking spaces are heavily used especially for student pick-ups in the afternoon for the nearby Acalanes High School, as illustrated in **Figure 2**. It was stated in the report that the new loading area could accommodate approximately eight (8) waiting vehicles. However, there is already an existing passenger loading zone between the intersection of Pleasant Hill Road/Deer Hill Road and the existing parking spaces that accommodate about four (4) vehicles. The net loss of 15 parking spaces (i.e.,  $19+4-8=15$ ) would result in a significant impact on passenger loading in the study area, which contradicts the conclusion in the updated traffic study report.

**Figure 2. Utilization of Existing Passenger Loading Zone & Parking Spaces (West Side of Pleasant Hill Road, South of Deer Hill Road)**




### Bike Lane

The proposed bicycle lane between Deer Hill Road and SR 24 on-ramp would be located between the right-turn trap lane and through lanes, as illustrated in **Figure 3**. This will create two major neighboring conflict zones for bicycles, as listed below.

- Conflict zone between bicycles and passenger-loading vehicles, as illustrated in the area circled in orange.
- Conflict zone between bicycles and vehicles in the right-turn trap lane where bicycles need to cross the trap lane, and between bicycles and vehicles entering & existing the property driveway, as illustrated in the area circled in red.

The updated traffic study did not address these significant conflicts in the neighboring conflict zones between bicycles and vehicles.

**Figure 3. Bicycle Conflict Zones**

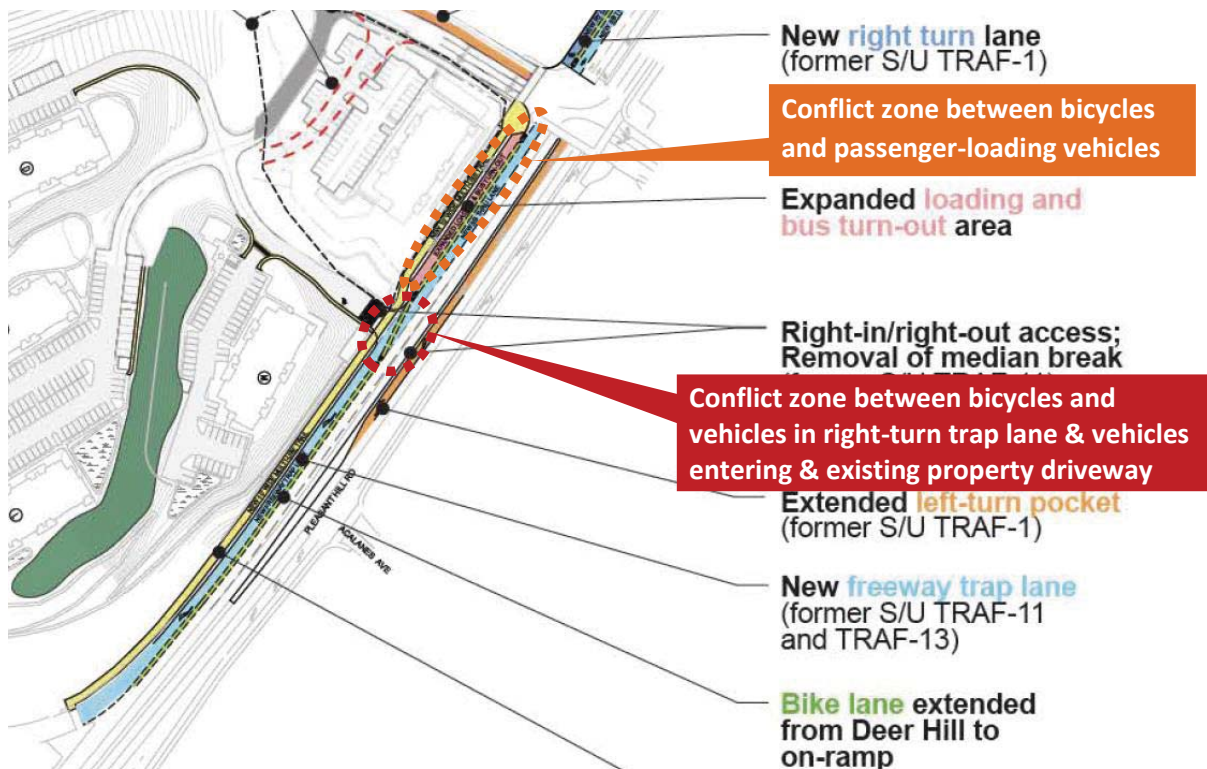


### Wildfire, PG&E Power Shut-off, and Evacuation Plan

It is worth noting that the proposed project is located in the Very High Fire Hazard Severity Zones (VHFHSZ) according to the City Ordinance No. 620 (**Figure 4**). Given the facts that: 1) semi-rural/urban interface wildfires have become a new reality; 2) all three fire stations within the study area use Pleasant Hill Road, and 3) all three fire stations fail to meet the target response time of five minutes, the extra delay on Pleasant Hill Road caused by the proposed project would worsen emergency response time as well as resident evacuation.

In addition, PG&E's power shut-offs, as a proactive measure to help avoid wildfires, have been affecting the study area and surrounding areas. As a consequence, affected signalized intersections become all-way-stop-controlled intersections due to traffic signal blackout (which would also affect any proposed EVP system also). It is recommended that the study should include an analysis to quantify the traffic impact of the proposed project under such conditions.

In addition, an evacuation plan for the residents in the area should be considered and how the proposed project would impact evacuation routes and emergency vehicles access if the proposed 315 units are being evacuated at the same time.

**Figure 4. Very High Fire Hazard Severity Zones, City of Lafayette<sup>1</sup>**

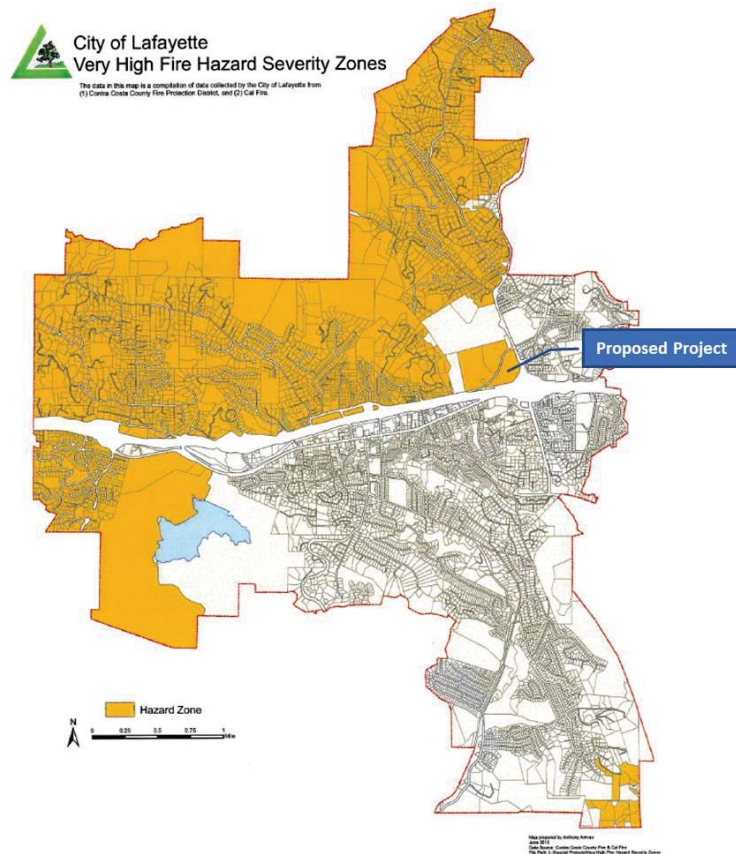

## Other Issues

**Significant and Unavoidable Impacts** – According to the updated traffic study report, the proposed project would result in significant and unavoidable impacts on the level of service at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard and the delay index on Pleasant Hill Road, unless a third southbound through lane were added to Pleasant Hill Road between north of Deer Hill Road and SR-24. However, as discussed earlier, the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road. Therefore, it cannot be claimed for sure that a third southbound through lane will be able to mitigate the proposed project. In addition, the Gateway Constraints Policy outlined in the Lamorinda Action Plan precludes adding more through lanes. Pleasant Hill Road is used as an alternative route by traffic heading south on I-680 in the AM Peak period. One of the rationales for the Gateway Constraints Policy is the recognition that any improvement in through traffic flow on Pleasant Hill Road is likely to attract more traffic from I-680. Therefore, this impact is considered significant and unmitigable.

**Excessive Queue at Laurel Drive/Deer Hill Road** – During our field visit, excessive left-turn queues were observed on the westbound approach of Laurel Drive/Deer Hill Road intersection in the AM peak period. According to the 95<sup>th</sup> percentile queue lengths included in the queuing and blocking reports (Appendix

<sup>1</sup> <https://www.lovelafayette.org/Home/ShowDocument?id=1950>





C, D, E and F in the updated traffic study report), the proposed project would cause significant impact at this intersection under Existing Plus Project scenario. No discussion on this impact or corresponding mitigation measures were mentioned in the updated traffic study.

## SUMMARY

Elite Transportation Group, Inc. (ETG) conducted a peer review of the updated traffic study report for the proposed Terraces of Lafayette project. The following areas are identified either unmitigable or inadequate:

- It was not clear from the updated traffic study report whether the traffic analysis models were calibrated to the local traffic condition before being used for traffic analysis, including queuing and weaving analysis. If the traffic analysis models were not calibrated, then the models would be unreliable and the conclusions drawn from the analysis would be questionable.
- The proposed project would result in significant and unavoidable impacts on the level of service at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard and the delay index on Pleasant Hill Road, unless a third southbound through lane were added to Pleasant Hill Road between north of Deer Hill Road and SR 24. However, the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road. Therefore, it cannot be claimed that a third southbound through lane will certainly be able to mitigate the proposed project. In addition, the Gateway Constraints Policy outlined in the Lamorinda Action Plan precludes adding more through lanes. Pleasant Hill Road is used as an alternative route by traffic heading south on I-680 in the AM Peak period. One of the rationales for the Gateway Constraints Policy is the recognition that any improvement in through traffic flow on Pleasant Hill Road is likely to attract more traffic from I-680. Therefore, this impact is considered significant and unmitigable.
- The updated traffic study stated that the 2017 MTSO monitoring results for Pleasant Hill Road and SR 24 overestimated the existing delay index, therefore, the 2013 results were used to estimate the 2019 delay index. However, the 2017 MTSO results were based on INRIX data, which has been validated and recognized as a reliable data source and has been used in many traffic-related projects. In addition, our travel time runs on Pleasant Hill Road conducted on October 22, 2019, show that the existing delay indices are higher but close to the 2017 monitoring results. The Google map-based delay indices are similar to the 2017 MTSO delay indices on SR 24. Therefore, our assessment is that the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road and SR 24.
- The northbound to westbound left-turn lane at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard will be extended further south based on the project site plan and the updated traffic study, which will result in approximately 600 feet only between the westbound SR 24 to northbound Pleasant Hill Road off-ramp and the extended northbound left-turn lane. During the PM peak hour, there will be about 30 project-generated vehicles exiting westbound SR 24 off-ramp which will have to cross three lanes in order to access the northbound left-turn lane. Crossing three lanes in this heavily congested short segment (approximately 600 feet) would not only cause additional delay, but also pose safety risks. However, these impacts were not fully studied or mitigated in the updated traffic study.
- Emergency vehicle preemption (EVP) equipment can help reduce emergency response time under non-congested or slightly-congested traffic conditions. For a congested and gridlocked arterial such as Pleasant Hill Road during peak hours, installing EVP would not fully mitigate the



impact of the proposed project on emergency response time. No analysis in the updated traffic report has shown emergency response time reduction by using EVP equipment on Pleasant Hill Road. This impact is deemed significant and unavoidable.

- The proposed project would remove 19 on-street parking spaces along Pleasant Hill Road south of Deer Hill Road. These parking spaces are heavily used especially for student pick-ups in the afternoon for the nearby Acalanes High School. It was stated in the report that the new loading area could accommodate approximately eight (8) waiting vehicles. The existing passenger loading zone can accommodate about four (4) vehicles. The net loss of 15 parking spaces would result in a significant impact on passenger loading in the study area and therefore deemed significant.
- The proposed bicycle lane between Deer Hill Road and SR 24 on-ramp would be located between the right-turn trap lane and through lanes. This will create major neighboring conflict zones - between bicycles and passenger-loading vehicles, between bicycles and vehicles in the right-turn trap lane where bicycles need to cross the trap lane, and between bicycles and vehicles entering & existing the property driveway. These significant conflicts in the conflict zones were not addressed in the updated traffic study.
- Grading on the proposed project site during construction would result in approximately 25,000 to 30,000 haul trips over a nine-month period. Our estimation shows 45 trucks per hour for seven (7) hours per weekday given that the construction trucks will avoid peak hours. This large amount of heavy truck traffic during construction will result in not only excessive intersection delay at the intersection of Pleasant Hill Road and Deer Hill Road/Stanley Boulevard, but also new traffic hazards when changing lanes or making wide turns when maneuvering on Pleasant Hill Road and Deer Hill Road. The updated traffic study report recommended to limit truck traffic to off-peak times, but did not analyze the potential impacts. Analysis should have been performed considering the massive amount of heavy trucks in the grading stage of construction (approximately 45 heavy truck trips per hour). The noise and pollution impacts of this amount of truck activity should be analyzed elsewhere in the CEQA analysis.
- Considering that the proposed project is located in the Very High Fire Hazard Severity Zones (VHFHSZ), as well as PG&E's power shut-offs as a proactive measure to help avoid wildfires, the study should include an analysis to quantify the traffic impact of the proposed project under such conditions. In addition, an evacuation plan for the residents inside the VHFHSZ needs to be developed or updated, given the new reality of wildfires and proximity to Acalanes High School buildings and student parking lot.
- During the field visit, excessive left-turn queues were observed on the westbound approach at the intersection of Laurel Drive/Deer Hill Road in the AM peak period. According to the 95th percentile queue lengths included in the queuing and blocking reports, the proposed project would cause a significant impact at this intersection under the Plus Project scenarios. No discussion on this impact or corresponding mitigation measures were mentioned in the updated traffic study.



August 24, 2020

**Re: Terraces of Lafayette Emergency Evacuation Traffic Impact Study**

Dear Mayor and Council Members

Apologies for the lateness in getting this to you, but we have been working on this since we got the latest TJKM memo on Tuesday. Attached is another memo prepared by Elite that reviews the TJKM memorandum dated August 10, 2020, which was a response to Elite's last memo of August 8, 2020. In addition, Elite has now run various simulations of the TJKM model, firstly to check they could duplicate TJKM's results, which they did, but then to look deeper at the results to answer some critical questions, such as "how many vehicles can actually get out if there was a fire". **Elite's findings are shocking**, and are summarized as follows:

1. Within the Terraces project including the Trap lane, of the 551 cars assumed, only 208 are able to get out in the first hour of the evacuation. 343 will be stuck. If there is no Trap lane **only 16 cars will make it out in the first hour** - 535 cars will be stuck in their driveways and unable to get to Pleasant Hill Road. This directly contradicts what the fire chief has been saying that he is not worried about the Terraces because it is by the freeway.
2. For evacuating traffic from the surrounding area, the situation is also bad. **If there is no trap lane built with the project, an additional 553 neighborhood cars will be stuck in their driveways after the first hour and unable to get to Pleasant Hill Road.** Adding the trap lane drops this to 152 extra cars stuck, but that is still 152 cars too many.
3. This explains TJKM's earlier conclusion that the Terraces only adds 10 to 16 seconds extra delay on Pleasant Hill Road; this is because the majority of evacuation traffic from the Terraces can't even make it to Pleasant Hill Road.
4. Another direct result is that TJKM's assumption that some parents will be able to pick up students from the schools on their way out is invalid – some of these parents don't even make it to Pleasant Hill Road in the first hour.
5. Elite looked at TJKM's response that although they started with an empty network, they did seed the network with some traffic before the evacuation begins. This is true, but TJKM only seeded it with enough traffic to form a back up from Deer Hill Road half way to Springhill Road. See page 8 of TJKM's memo for an illustration. This is not heavy commute hour traffic, and so the model is not being at all conservative in this respect.
6. Note that all these results are based on TJKM's assumption in the model that there will not be any traffic congestion on Highway 24. In fact, the situation will be much worse if Highway 24 is

backed up, which is likely. Elite addresses on page 9 of their memo TJKM's response that Highway 24 traffic does not matter – it does!

7. On page 10 of their memo, Elite also responds to TJKM's claims that the on-ramps to Highway 24 will have the capacity to handle the extra evacuation traffic that will be generated by the Terraces – that is not true.

In summary, it is clear from Elite's comprehensive report that the TJKM evacuation model actually shows that **the Terraces will impose significant safety threats on both the surrounding neighborhood as well as the residents within the project itself** due to the traffic congestion and emergency evacuation delays. You should therefore deny this project at your meeting this evening.

Sincerely,

Colin Elliott on behalf of Michael Griffiths

Attached:

1. Elite Peer Review memo dated 8/23/2020



# Memorandum

**Date:** August 23, 2020

**To:** Michael Griffiths

**From:** Lin Zhang, PhD, PE, TE, PTOE  
Elite Transportation Group, Inc. (ETG)

**Subject:** **Peer Review of TJKM's Evacuation Models and Response Memo for Terraces of Lafayette Traffic Impact Study**

TJKM, the traffic study consultant for the proposed Terraces of Lafayette Project, released a memorandum dated August 10, 2020, in response to ETG's comments regarding TJKM's emergency evacuation modeling and analysis. The purpose of this memorandum is to provide a summary of our latest findings based on a review of the TJKM's response memo and evacuation models.

TJKM's evacuation models were developed for AM and PM peak hours using Synchro/SimTraffic, a commonly used software package for arterial operations. TJKM's evacuation model files were organized for the following six scenarios ("Project" is referred as the Terraces of Lafayette):

- **Evac 1** – Evacuation (without project) in the AM Peak
- **Evac 1 + Project** – Evacuation plus project, with trap lane<sup>1</sup>, in the AM Peak
- **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak
- **Evac 2** – Evacuation (without project) in the PM Peak
- **Evac 2 + Project** – Evacuation plus project, with trap lane, in the PM Peak
- **Evac 2 + Project Variant** – Evacuation plus project, no trap lane, in the PM Peak

In TJKM's memo, "denied entry vehicles", which will be explained in the next, were not reported. We reran SimTraffic simulation for the AM peak scenarios using the Synchro files and the same parameters that TJKM provided, as listed below:

- 5 runs per synchro file
- 10-minute seeding interval
- 60-minute analysis interval
- Random seed 1412

The SimTraffic simulation reports are attached in **Appendix**. We were able to replicate majority of the performance measures that were included in TJKM's memo. In addition, we also reported "denied entry vehicles", for both systemwide and individual intersections (see **Appendix**).

---

<sup>1</sup> The Gateway Constraints Policy outlined in the Lamorinda Action Plan precludes adding more through lanes. Pleasant Hill Road is used as an alternative route by traffic heading south on I-680 in the AM Peak period. One of the rationales for the Gateway Constraints Policy is the recognition that any improvement in through traffic flow on Pleasant Hill Road is likely to attract more traffic from I-680.





## DENIED ENTRY VEHICLES (WAITING TO ENTER THE TRAFFIC NETWORK)

**Denied entry vehicles** (i.e., unserved vehicles) are the vehicles that are still waiting to enter the traffic network by the end of the traffic analysis period. We checked and found many denied entry vehicles in TJKM's evaluation models. For instance, in the AM peak hour evacuation model (7:00-8:00 AM), the number of denied entry vehicles including the Terraces of Lafayette project is **more than 3,400 vehicles** under the trap lane scenario (**Table 1**), or **more than 3,800 vehicles** under the no trap lane scenario (**Table 2**). This means that by 8:00 AM (the end of the traffic analysis period), there would still be more than 3,400 vehicles (under the trap lane scenario), or more than 3,800 vehicles (under the no trap lane scenario), waiting to get onto streets for evacuation.

**Table 1. Systemwide Denied Entry Vehicles – AM Peak, with Project, with Trap Lane**

Interval #1 Information Recording						
Start Time	7:00					
End Time	8:00					
Total Time (min)	60					
Volumes adjusted by PHF.						
Run Number	1	2	3	4	5	Avg
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

**Table 2. Systemwide Denied Entry Vehicles – AM Peak, with Project, No Trap Lane (Project Variant)**

Interval #1 Information Recording						
Start Time	7:00					
End Time	8:00					
Total Time (min)	60					
Volumes adjusted by PHF.						
Run Number	1	2	3	4	5	Avg
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6



We checked the project driveway connecting with Pleasant Hill Road, and saw that the project driveway is still packed with vehicles by the end of the traffic analysis period (see **Figure 1**). We then checked and found that there were more than 500 denied entry vehicles under the trap lane scenario (**Table 3**), or more than 700 denied entry vehicles under the no trap lane scenario (**Table 4**). Only 12 vehicles, or 2%, would be able to get out of the Terraces of Lafayette community during the 7:00-8:00 AM one-hour evacuation period under the no trap lane scenario. Even with the trap lane scenario, only 217 vehicles, or 30%, would be able to get out of the Terraces of Lafayette community. The denied entry vehicles would not show up on the short project driveway. To better visualize the stack of the denied entry vehicles, we “artificially” extended the project driveway, as shown in **Figure 1**. Majority of vehicles could not even leave Terraces of Lafayette community after the one-hour evacuation period.

**Table 3. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, with Trap Lane**

**11: Pleasant Hill Road & Project Dwy Performance by movement**


Movement	EBR	NBT	SBT	All
Denied Delay (hr)	294.0	0.0	0.0	294.0
Denied Del/Veh (s)	1369.0	0.0	0.0	446.0
Total Delay (hr)	7.0	0.0	13.7	20.7
Total Del/Veh (s)	112.7	0.0	31.4	40.6
Stop Delay (hr)	7.5	0.0	11.1	18.6
Stop Del/Veh (s)	120.4	0.0	25.4	36.5
Vehicles Entered	217	39	1561	1817
Vehicles Exited	217	39	1558	1814
Hourly Exit Rate	217	39	1558	1814
Input Volume	735	35	4244	5014
% of Volume	30	111	37	36
Denied Entry Before	31	0	0	31
Denied Entry After	556	0	0	556

**Table 4. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, No Trap Lane (Project Variant)**

**11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	420.6	0.0	0.0	420.6
Denied Del/Veh (s)	1907.0	0.0	0.0	688.9
Total Delay (hr)	7.9	0.0	8.2	16.2
Total Del/Veh (s)	1361.7	0.0	21.5	40.6
Stop Delay (hr)	8.0	0.0	4.7	12.6
Stop Del/Veh (s)	1366.8	0.0	12.2	31.7
Vehicles Entered	13	39	1365	1417
Vehicles Exited	12	39	1365	1416
Hourly Exit Rate	12	39	1365	1416
Input Volume	735	35	4244	5014
% of Volume	2	111	32	28
Denied Entry Before	61	0	0	61
Denied Entry After	781	0	0	781

**Figure 1. Pleasant Hill Road & Project Driveway (by end of traffic analysis period in AM peak)**

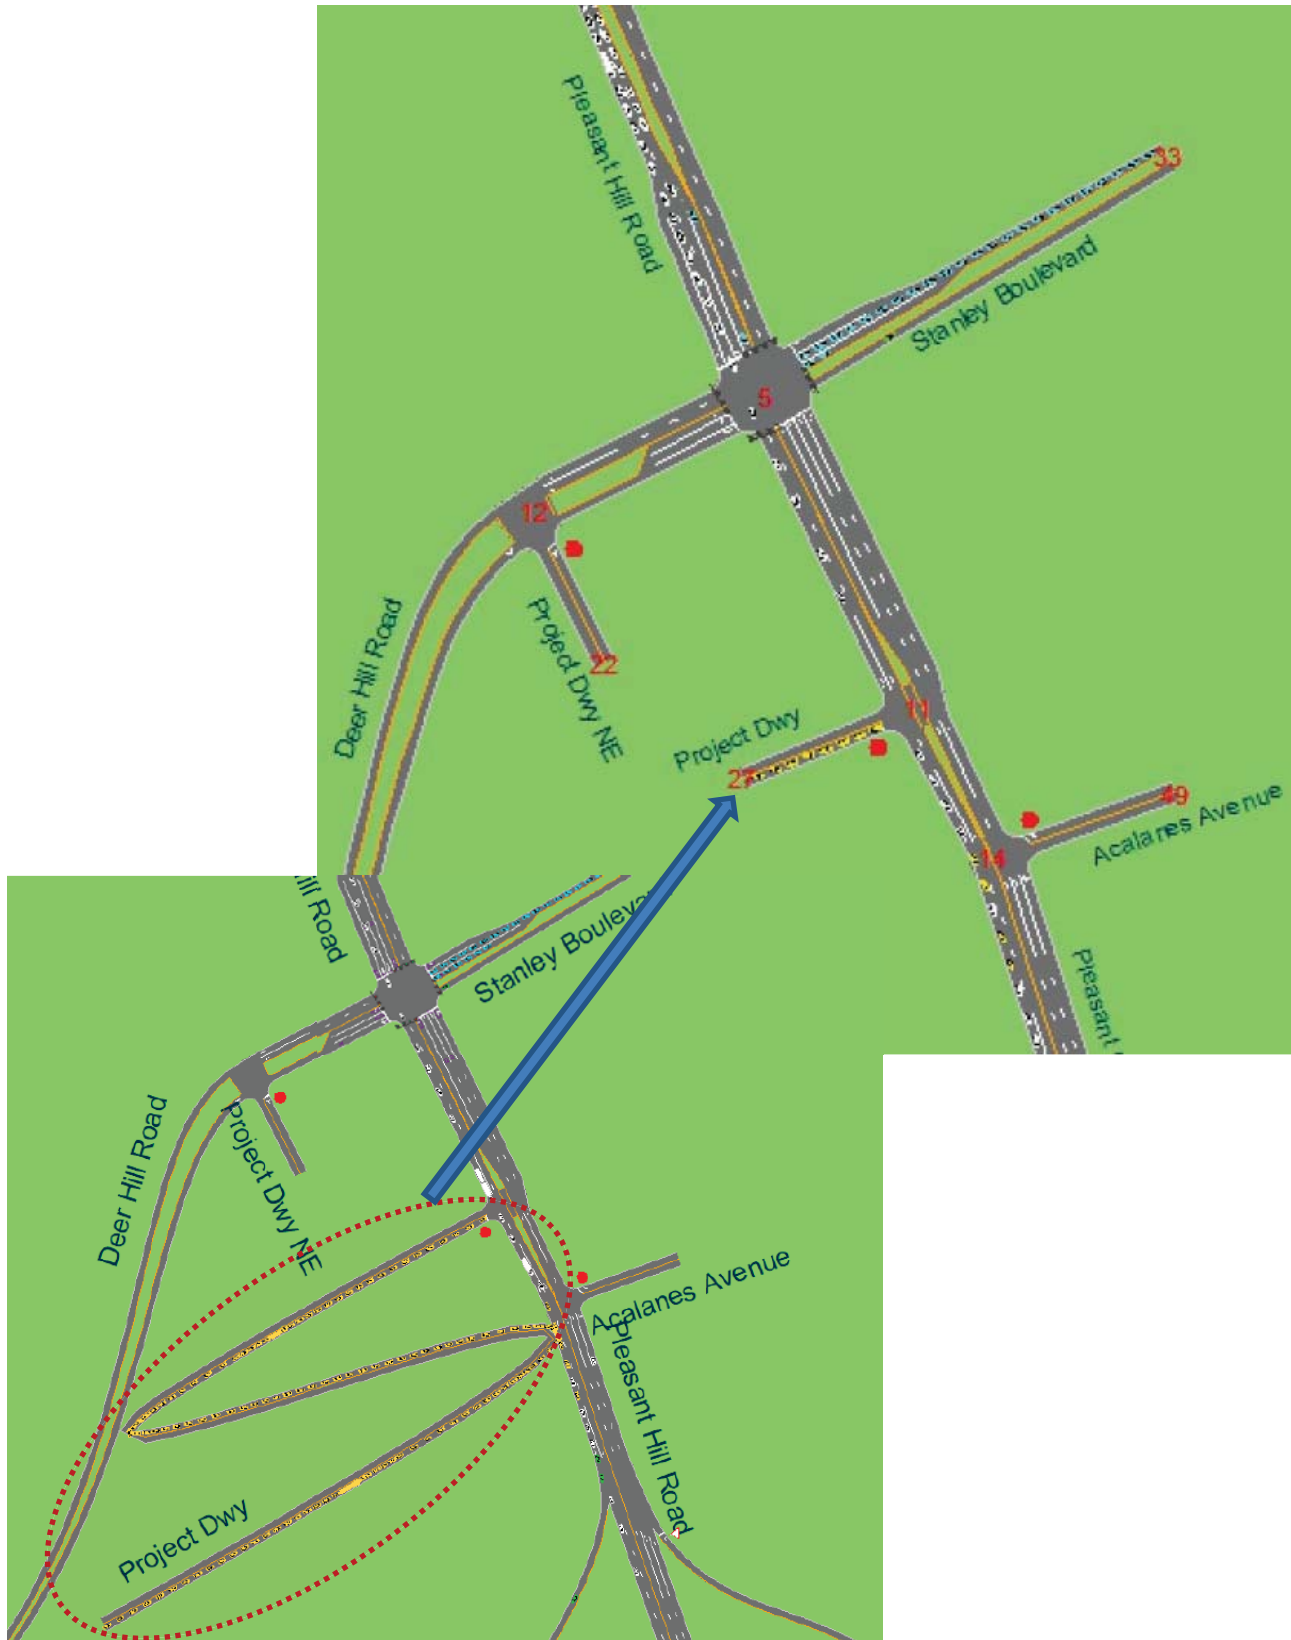



We noticed that TJKM assumed a peak hour factor (PHF) of 0.75 in the evacuation models. The PHF is usually used to convert the hourly traffic volume into the flow rate that represents the busiest 15 minutes of the rush hour.

$$PHF = \frac{\text{Total Hourly Traffic Volume}}{(\text{Peak 15-Minute Traffic Volume with the Hour}) \times 4}$$

Using a PHF of 0.75 means that the analysis flow rate (i.e., peak 15-minute traffic flow rate) is 33.3% more than the hourly traffic volume.

Different from a typical intersection delay and level of service (LOS) analysis, the purpose of an evacuation model is mainly focused on how quickly the evacuation can be achieved. Therefore, using PHFs may not be appropriate for evacuation analyses. We then ran SimTraffic simulation for the AM peak scenarios using the same Synchro files and primary parameters, with the only change of PHF from 0.75 to 1.0. The SimTraffic simulation reports based on PHF of 1.0 are attached in **Appendix**.

Even with a PHF of 1.0, we still found that there would be more than 300 denied entry vehicles under the trap lane scenario (**Table 5**), or more than 500 denied entry vehicles under the no trap lane scenario (**Table 6**). Only 13 vehicles, or 2%, would be able to get out of the Terraces of Lafayette community during the 7:00-8:00 AM one-hour evacuation period under the no trap lane scenario. Even with the trap lane scenario, only 210 vehicles, or 38%, would be able to get out of the Terraces of Lafayette community.

**Table 5. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, with Trap Lane (PHF=1.0)**

**11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	205.8	0.0	0.0	205.8
Denied Del/Veh (s)	1266.7	0.0	0.0	341.3
Total Delay (hr)	7.0	0.0	14.4	21.3
Total Del/Veh (s)	115.4	0.0	32.9	42.3
Stop Delay (hr)	7.4	0.0	11.8	19.2
Stop Del/Veh (s)	123.2	0.0	27.0	38.1
Vehicles Entered	211	26	1560	1797
Vehicles Exited	210	26	1556	1792
Hourly Exit Rate	210	26	1556	1792
Input Volume	551	26	3183	3760
% of Volume	38	100	49	48
Denied Entry Before	31	0	0	31
Denied Entry After	374	0	0	374

**Table 6. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, No Trap Lane (Project Variant) (PHF=1.0)****11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	333.1	0.0	0.0	333.1
Denied Del/Veh (s)	1956.2	0.0	0.0	598.1
Total Delay (hr)	8.0	0.0	8.0	16.1
Total Del/Veh (s)	1374.8	0.0	21.0	40.7
Stop Delay (hr)	8.1	0.0	4.5	12.5
Stop Del/Veh (s)	1380.2	0.0	11.7	31.7
Vehicles Entered	13	25	1367	1405
Vehicles Exited	13	25	1368	1406
Hourly Exit Rate	13	25	1368	1406
Input Volume	551	26	3183	3760
% of Volume	2	96	43	37
Denied Entry Before	65	0	0	65
Denied Entry After	600	0	0	600

The denied entry vehicles exist on other streets too, including Stanley Boulevard, Spring Hill Road, Quandt Road, and Reliez Valley Road, as shown in **Figure 2**. Keep it in mind that Stanley Boulevard is mainly for evacuating students from Acalanes High School, and denied entry vehicles (i.e., waiting to enter the traffic network) would be more than 900.

With so many denied entry vehicles systemwide (>3,400 vehicles under the trap lane scenario, or >3,800 vehicles under the no trap lane scenario), and 98% of vehicles under the no trap lane scenario (or more than 60% under the trap lane scenario) could not even leave Terraces of Lafayette community after the one-hour evacuation period, TJKM's evacuation models apparently lack credibility and the results coming out of the evacuation models are simply invalid.




Figure 2. Streets with Significant Denied Entry Vehicles (by end of traffic analysis period in AM peak)



## BACKGROUND TRAFFIC

In their response memo, TJKM mentioned that they included a 10-minute “seeding” period (i.e., 6:50-7:00 AM). We ran the 10-minute seeding period, and found that traffic was only backed up to somewhere between Deer Hill Road/Stanley Boulevard and Spring Hill Road/Quant Road, as shown in **Figure 3**.

**Figure 3. Traffic Condition (by end of 10-minute seeding period in AM peak)**

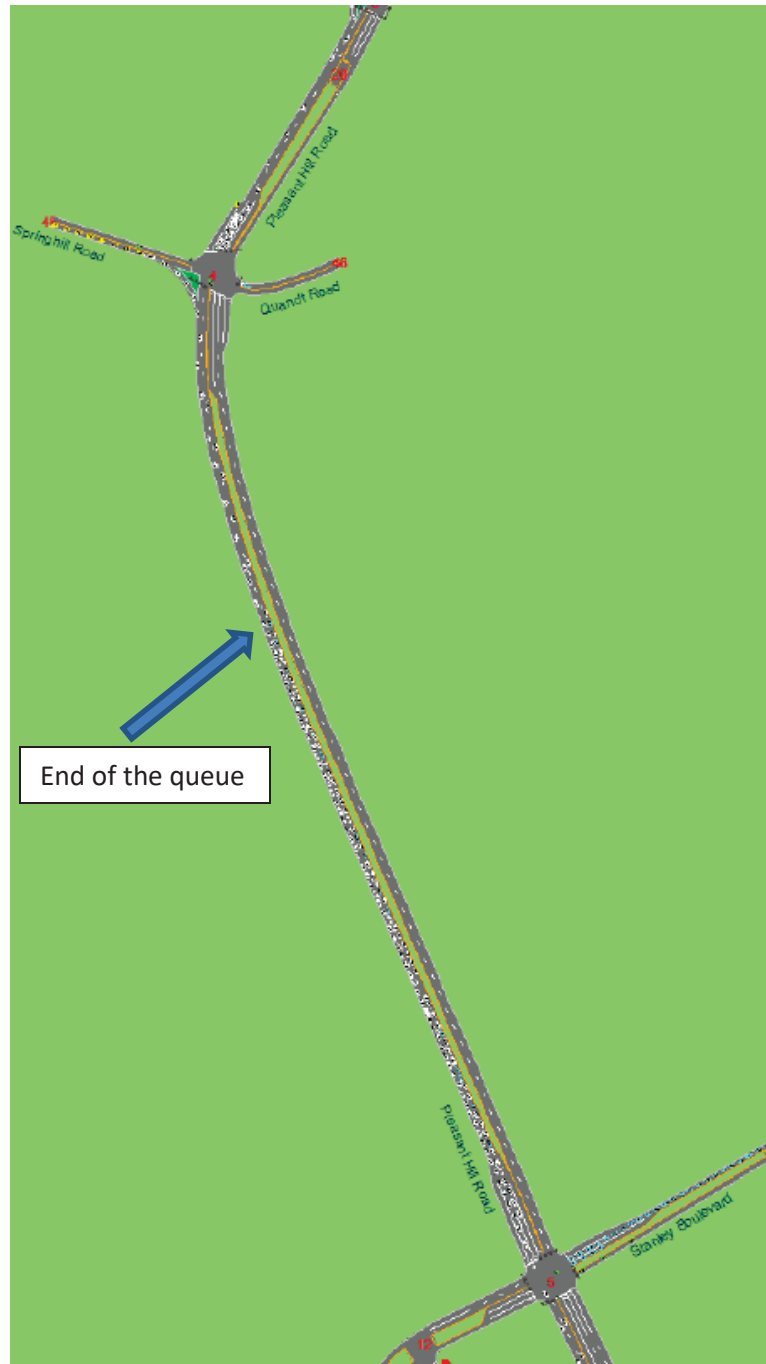



However, it is well known that the Pleasant Hill Road backs up much further upstream at 7:00 AM during the morning peak. There should have been many more vehicles (i.e., “background traffic”) already in the roadway system when the evacuation starts during the AM peak hour.

In their response memo, TJKM claimed that “By including both evacuation traffic and normal commute traffic, these vehicles would be double counted.” This would only be true if all of the traffic on Pleasant Hill Road would come only from Lafayette. However, Pleasant Hill Road carries traffic from many surrounding cities and communities. The right approach is to load the roadway network so that at the beginning of the evacuation (i.e., 7:00 AM during the morning peak), the modeled traffic condition represents what would look like during a normal day without evacuation. After that, no new non-evacuation traffic would enter Pleasant Hill Road from the north once a roadblock has been set up after the evacuation order is given. However, TJKM’s evacuation models did not follow the right approach, and therefore significantly underestimated background traffic. Adding background traffic could make traffic delay exponentially worse.

## SR 24 CAPACITY CONSTRAINT

The evacuation models assumed that all evacuating vehicles would use SR 24 to leave Lafayette – 50% would travel eastbound (EB) and 50% would travel westbound (WB). We raised the question that the evacuation models ended at the on-ramps (both EB and WB) and did not model or put capacity constraints on SR 24 mainline freeway, as illustrated in **Figure 4**. By doing this, TJKM assumed that SR 24 would have “unlimited” capacity to absorb the additional evacuating traffic. This assumption is unrealistic since SR 24 is already congested (WB in AM and EB in PM) and does not have enough extra capacity to accommodate the significant amount increase of traffic due to evacuation.

In their response memo, TJKM did not address this concern directly. It is only simply stated that “the evacuation traffic volumes are already extremely conservative.”

Here is a simple example for the AM peak hour to illustrate the importance of SR 24 capacity constraint. Again, this example is for illustration purposes and it does not replace detailed and accurate modeling.

- Same assumption of all evacuating vehicles would use SR 24 to leave Lafayette – 50% would travel EB and 50% would travel WB.
- In the AM peak hour (7:00-8:00 AM), SR 24 WB has a capacity constraint – assuming 900 vehicles are able to get on and use SR 24 in the WB direction.
- Traffic demand during the evacuation is 1,800 vehicles to use the SR 24 WB on-ramp.
- With the above assumptions, vehicles cannot be fully evacuated in two hours (i.e.,  $1,800/900 = 2$ ). In other words, **one additional hour** is needed after the one-hour peak period. However, with all the above assumptions except for the SR 24 capacity constraint, as modelled by TJKM, vehicles can be fully evacuated within the one-hour peak period.
- Additional evacuating traffic coming out of the Terraces of Lafayette community is 551 vehicles (based on TJKM’s memo dated June 22, 2020). Now adding half of them to the SR 24 WB direction,



the additional 275 vehicles (i.e.,  $551/2 = 275$ ) coming out of the Terraces of Lafayette community would cause additional 18 minutes (i.e.,  $275/900 \times 60 = 18$ ) to evacuate.

Therefore, the evacuation models must have significantly underestimated the level of traffic congestion, and the impacts of which is that traffic is unable to get onto the SR 24 freeway and gets backed up on surface streets.

**Figure 4. Evacuation Models Ended at On-Ramps**



## ON-RAMP CAPACITY CONSTRAINT

We stated in our previous memo that the single-lane on-ramps (both EB and WB) may not be able to handle the significant amount of traffic getting onto SR 24 freeway during the peak hours, with a maximum capacity of 1,900 vehicles per hour per lane at on-ramps assuming no congestion on the freeway onto which the traffic merges. TJKM responded by stating that “it is not an absolute limit, and exceeding 1,900 vehicles per hour per lane does not immediately result in gridlock or excessive delays. In addition, the sections of SR-24 where the westbound and eastbound ramps enter the freeway feature long auxiliary lanes, such that evacuation traffic would have ample time to merge into the other travel lanes without slowing down ramp traffic.”

- On-Ramp Capacity:** TJKM stated that on-ramp maximum capacity of 1,900 vehicles per hour per lane “it is not an absolute limit”. Traffic Engineers generally use 1,900 vehicles under the close to “ideal” condition without traffic congestion or traffic flow breakdown. 1,900 vehicles per hour per lane corresponds to 1.9 seconds in headway (i.e.,  $3,600 \text{ seconds}/1,900 = 1.9$ ). Headway is a



measure of the temporal space between two vehicles. Specifically, the headway is the time that elapses between the arrival of the leading vehicle and the following vehicle at the designated test point. In fact, on-ramp capacity drops when traffic is congested (traffic flow breakdown), causing “productivity loss”. It is not uncommon to see on-ramp capacity drops to 1,200 vehicles per hour per lane or less when traffic follow breaks down. Under the emergency evacuation condition, traffic typically breaks down due to many factors such as poor visibility (due to smoke), rubbernecking, panicking, etc. We agree that the on-ramp capacity is not an absolute limit; instead, it drops significantly under the emergency evacuation condition. In this perspective, traffic congestion would be even much worse.

- **Auxiliary Lanes:** TJKM stated that “the sections of SR-24 where the westbound and eastbound ramps enter the freeway feature long auxiliary lanes, such that evacuation traffic would have ample time to merge into the other travel lanes without slowing down ramp traffic.” Auxiliary lanes on SR 24 do not help when traffic is already congested (WB in AM and EB in PM) while much more additional traffic is being loaded onto SR 24 due to emergency evacuation.

## CONCLUSION

In conclusion, the evacuation models that TJKM developed has critical fatal flaws. The results generated from the evacuation models are invalid and should not be used for any decision-making.



## APPENDIX

### SimTraffic Simulation Reports

- PHF = 0.75 (TJKM's assumption)
  - **Evac 1** – Evacuation (without project) in the AM Peak
  - **Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM Peak
  - **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak
- PHF = 1.0
  - **Evac 1** – Evacuation without project in the AM Peak
  - **Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM Peak
  - **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak

PHF = 0.75 (TJKM's assumption)

**Evac 1** – Evacuation (without project) in the AM Peak

## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1839	1799	1853	1780	1801	1815
Vehs Exited	1731	1727	1714	1677	1712	1712
Starting Vehs	281	306	248	270	292	279
Ending Vehs	389	378	387	373	381	380
Denied Entry Before	111	134	82	89	97	102
Denied Entry After	3211	3348	3053	3274	3192	3215
Travel Distance (mi)	1650	1646	1657	1635	1633	1644
Travel Time (hr)	1970.3	2079.1	1891.0	2004.2	1963.6	1981.7
Total Delay (hr)	1913.1	2022.1	1833.3	1947.6	1906.9	1924.6
Total Stops	6129	6226	6137	6034	6042	6113
Fuel Used (gal)	490.2	515.2	471.8	497.7	486.6	492.3

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
No data recorded this interval.	

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by PHF.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1839	1799	1853	1780	1801	1815
Vehs Exited	1731	1727	1714	1677	1712	1712
Starting Vehs	281	306	248	270	292	279
Ending Vehs	389	378	387	373	381	380
Denied Entry Before	111	134	82	89	97	102
Denied Entry After	3211	3348	3053	3274	3192	3215
Travel Distance (mi)	1650	1646	1657	1635	1633	1644
Travel Time (hr)	1970.3	2079.1	1891.0	2004.2	1963.6	1981.7
Total Delay (hr)	1913.1	2022.1	1833.3	1947.6	1906.9	1924.6
Total Stops	6129	6226	6137	6034	6042	6113
Fuel Used (gal)	490.2	515.2	471.8	497.7	486.6	492.3

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.2
Total Del/Veh (s)	3.6	6.3	4.1
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	2.8	4.5	3.1
Vehicles Entered	176	36	212
Vehicles Exited	175	36	211
Hourly Exit Rate	175	36	211
Input Volume	173	33	206
% of Volume	101	109	102
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvally Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	19.7	0.3	20.1
Total Del/Veh (s)	3.4	144.5	5.2	95.1
Stop Delay (hr)	0.1	18.6	0.2	18.9
Stop Del/Veh (s)	3.5	136.2	3.4	89.3
Vehicles Entered	56	479	212	747
Vehicles Exited	55	467	212	734
Hourly Exit Rate	55	467	212	734
Input Volume	56	637	207	900
% of Volume	98	73	102	82
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	571.5	0.0	571.5
Denied Del/Veh (s)	1365.2	0.0	918.1
Total Delay (hr)	17.5	8.3	25.7
Total Del/Veh (s)	199.0	39.8	87.2
Stop Delay (hr)	17.5	6.7	24.3
Stop Del/Veh (s)	199.8	32.4	82.2
Vehicles Entered	303	734	1037
Vehicles Exited	297	727	1024
Hourly Exit Rate	297	727	1024
Input Volume	1499	900	2399
% of Volume	20	81	43
Denied Entry Before	8	0	8
Denied Entry After	1204	0	1204

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	354.3	42.1	6.4	0.0	0.0	0.0	402.8
Denied Del/Veh (s)	1456.1	485.6	480.4	0.0	0.0	0.0	641.6
Total Delay (hr)	9.9	7.9	1.2	0.1	32.3	2.5	53.8
Total Del/Veh (s)	201.6	123.7	126.0	96.5	123.9	93.5	131.2
Stop Delay (hr)	10.2	7.7	1.1	0.1	32.5	2.6	54.2
Stop Del/Veh (s)	207.6	120.7	121.8	94.2	124.8	94.5	132.0
Vehicles Entered	167	228	33	5	922	97	1452
Vehicles Exited	166	223	32	5	897	94	1417
Hourly Exit Rate	166	223	32	5	897	94	1417
Input Volume	857	297	45	5	2168	231	3603
% of Volume	19	75	71	100	41	41	39
Denied Entry Before	11	1	0	0	0	0	12
Denied Entry After	709	84	15	0	0	0	808

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	573.7	0.0	0.0	0.0	0.0	573.7
Denied Del/Veh (s)	1606.0	0.0	0.0	0.0	0.0	792.8
Total Delay (hr)	23.6	0.0	0.0	13.0	140.8	177.4
Total Del/Veh (s)	320.2	17.2	2.9	373.8	389.2	369.9
Stop Delay (hr)	23.4	0.0	0.0	12.3	137.2	172.9
Stop Del/Veh (s)	317.5	15.6	2.9	353.2	379.4	360.7
Vehicles Entered	238	7	26	112	1174	1557
Vehicles Exited	241	7	26	113	1139	1526
Hourly Exit Rate	241	7	26	113	1139	1526
Input Volume	1212	6	29	291	3032	4570
% of Volume	20	117	90	39	38	33
Denied Entry Before	82	0	0	0	0	82
Denied Entry After	1048	0	0	0	0	1048

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	0.0	0.0
Total Del/Veh (s)	0.1	4.8	4.1
Stop Delay (hr)	0.0	0.0	0.0
Stop Del/Veh (s)	0.0	0.0	0.0
Vehicles Entered	2	11	13
Vehicles Exited	2	11	13
Hourly Exit Rate	2	11	13
Input Volume	7	28	35
% of Volume	29	39	37
Denied Entry Before	0	0	0
Denied Entry After	0	0	0



7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.8	1.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	28	28
Vehicles Exited	28	28
Hourly Exit Rate	28	28
Input Volume	29	29
% of Volume	97	97
Denied Entry Before	0	0
Denied Entry After	0	0

14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.5	4.5
Total Del/Veh (s)	0.3	11.8	11.6
Stop Delay (hr)	0.0	1.4	1.4
Stop Del/Veh (s)	0.0	3.7	3.6
Vehicles Entered	33	1377	1410
Vehicles Exited	33	1376	1409
Hourly Exit Rate	33	1376	1409
Input Volume	35	4244	4279
% of Volume	94	32	33
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.5
Total Del/Veh (s)	0.7	18.8	15.1	16.6
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.2	2.1
Vehicles Entered	33	697	679	1409
Vehicles Exited	33	695	681	1409
Hourly Exit Rate	33	695	681	1409
Input Volume	35	2140	2104	4279
% of Volume	94	32	32	33
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.7	6.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	695	695
Vehicles Exited	695	695
Hourly Exit Rate	695	695
Input Volume	2140	2140
% of Volume	32	32
Denied Entry Before	0	0
Denied Entry After	0	0

### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.1	0.1
Total Delay (hr)	0.0	1.3	1.3
Total Del/Veh (s)	7.3	6.3	6.3
Stop Delay (hr)	0.0	0.6	0.6
Stop Del/Veh (s)	1.7	3.2	3.1
Vehicles Entered	13	716	729
Vehicles Exited	13	716	729
Hourly Exit Rate	13	716	729
Input Volume	35	2140	2175
% of Volume	37	33	34
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### Total Network Performance

Denied Delay (hr)	1613.5
Denied Del/Veh (s)	1154.8
Total Delay (hr)	311.1
Total Del/Veh (s)	535.4
Stop Delay (hr)	289.0
Stop Del/Veh (s)	497.3
Vehicles Entered	1815
Vehicles Exited	1712
Hourly Exit Rate	1712
Input Volume	37038
% of Volume	5
Denied Entry Before	102
Denied Entry After	3215

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.3	20.2	0.1	11
	11	0.0	4.0	0.0	34
Stanley Boulevard	5	17.2	24.2	0.1	12
Quandt Road	4	96.5	141.4	0.4	11
Total		113.9	189.8	0.6	12

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	6.3	21.5	0.2	26
	19	1.3	16.3	0.1	33
Greenvalley Drive	2	5.2	12.0	0.1	21
Reliez Valle Road	3	39.1	63.3	0.3	14
	20	24.2	27.8	0.0	4
Springhill Road	4	123.9	133.4	0.1	3
Deer Hill Road	5	359.4	398.0	0.4	4
	11	19.5	28.0	0.1	10
Acalanes Avenue	14	11.8	15.8	0.0	9
	15	18.8	25.0	0.1	9
	16	6.7	16.1	0.1	24
	17	7.3	16.4	0.1	16
Mt. Diablo Boulevard	6	4.8	12.9	0.1	19
SR 24 EB Off Ramp	7	1.8	4.6	0.1	48
Total		630.0	791.1	1.7	8

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	91	48	11
Average Queue (ft)	42	11	1
95th Queue (ft)	73	37	8
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	56	611	112	55	75
Average Queue (ft)	14	562	73	12	31
95th Queue (ft)	35	664	112	37	63
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		82	84		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		76			
Queuing Penalty (veh)		0			

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	467	486	360	366
Average Queue (ft)	283	457	200	198
95th Queue (ft)	631	473	292	304
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	33	96		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				34
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	370	255	20	523	520	96	217	222
Average Queue (ft)	338	231	3	470	470	76	169	181
95th Queue (ft)	355	246	15	612	625	140	262	266
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	89		86	88		28	86
Queuing Penalty (veh)	0	0		1036	1053		331	1036
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				87	81	0		
Queuing Penalty (veh)				0	188	3		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	554	32	47	275	2267	2401
Average Queue (ft)	194	524	3	11	183	2238	2366
95th Queue (ft)	304	543	17	34	335	2325	2480
Link Distance (ft)		504	347	347		2220	2220
Upstream Blk Time (%)		95				40	94
Queuing Penalty (veh)		0				672	1556
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	9	97			6	28	66
Queuing Penalty (veh)	52	587			88	81	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

---

Movement	SB
Directions Served	T
Maximum Queue (ft)	3
Average Queue (ft)	0
95th Queue (ft)	2
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	B11	B11
Directions Served	T	T	T	T
Maximum Queue (ft)	190	254	400	387
Average Queue (ft)	45	206	186	334
95th Queue (ft)	142	305	430	436
Link Distance (ft)	147	147	347	347
Upstream Blk Time (%)	1	20	1	7
Queuing Penalty (veh)	17	428	25	146
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	361
Average Queue (ft)	183
95th Queue (ft)	427
Link Distance (ft)	266
Upstream Blk Time (%)	6
Queuing Penalty (veh)	117
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	



---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement	SB
Directions Served	TR
Maximum Queue (ft)	217
Average Queue (ft)	80
95th Queue (ft)	174
Link Distance (ft)	314
Upstream Blk Time (%)	0
Queuing Penalty (veh)	0
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Network Summary

---

Network wide Queuing Penalty: 7415

---

PHF = 0.75 (TJKM's assumption)

**Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM  
Peak

### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10

No data recorded this interval.

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60

Volumes adjusted by PHF.

Run Number	1	2	3	4	5	Avg
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

### 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.2
Total Del/Veh (s)	3.8	5.4	4.1
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	2.9	3.8	3.0
Vehicles Entered	177	34	211
Vehicles Exited	176	33	209
Hourly Exit Rate	176	33	209
Input Volume	173	33	206
% of Volume	102	100	101
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	20.1	0.3	20.5
Total Del/Veh (s)	3.9	148.6	5.7	97.7
Stop Delay (hr)	0.1	19.1	0.2	19.4
Stop Del/Veh (s)	4.1	140.8	3.9	92.2
Vehicles Entered	59	475	209	743
Vehicles Exited	59	464	209	732
Hourly Exit Rate	59	464	209	732
Input Volume	56	637	207	900
% of Volume	105	73	101	81
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	400.7	0.0	400.7
Denied Del/Veh (s)	962.4	0.0	646.6
Total Delay (hr)	15.4	6.5	21.8
Total Del/Veh (s)	88.9	31.0	57.3
Stop Delay (hr)	13.7	5.1	18.8
Stop Del/Veh (s)	79.2	24.6	49.4
Vehicles Entered	609	732	1341
Vehicles Exited	606	725	1331
Hourly Exit Rate	606	725	1331
Input Volume	1499	900	2399
% of Volume	40	81	55
Denied Entry Before	7	0	7
Denied Entry After	890	0	890

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	381.4	20.4	3.7	0.0	0.0	0.0	405.4
Denied Del/Veh (s)	1544.3	254.1	269.8	0.0	0.0	0.0	570.4
Total Delay (hr)	9.2	7.5	1.4	0.1	21.9	2.0	42.0
Total Del/Veh (s)	224.5	108.8	117.4	81.8	65.0	53.8	84.7
Stop Delay (hr)	9.4	7.2	1.3	0.1	19.4	1.8	39.3
Stop Del/Veh (s)	229.7	104.7	112.5	81.0	57.8	50.3	79.3
Vehicles Entered	138	247	42	5	1198	129	1759
Vehicles Exited	137	244	41	5	1175	128	1730
Hourly Exit Rate	137	244	41	5	1175	128	1730
Input Volume	857	297	45	5	2168	231	3603
% of Volume	16	82	91	100	54	55	48
Denied Entry Before	40	0	0	0	0	0	40
Denied Entry After	751	42	7	0	0	0	800

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	564.4	0.0	0.0	0.0	0.0	564.4
Denied Del/Veh (s)	1578.8	0.0	0.0	0.0	0.0	725.7
Total Delay (hr)	21.7	0.0	0.0	3.5	24.7	50.0
Total Del/Veh (s)	326.5	12.8	3.7	97.3	64.6	100.7
Stop Delay (hr)	21.5	0.0	0.0	3.3	21.4	46.2
Stop Del/Veh (s)	323.2	11.6	3.9	91.1	55.9	93.1
Vehicles Entered	214	7	32	128	1346	1727
Vehicles Exited	215	7	32	128	1346	1728
Hourly Exit Rate	215	7	32	128	1346	1728
Input Volume	1212	6	29	291	3032	4570
% of Volume	18	117	110	44	44	38
Denied Entry Before	72	0	0	0	0	72
Denied Entry After	1073	0	0	0	0	1073

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	6.2	6.2
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	8	8
Vehicles Exited	8	8
Hourly Exit Rate	8	8
Input Volume	35	35
% of Volume	23	23
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.9	1.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	34	34
Vehicles Exited	34	34
Hourly Exit Rate	34	34
Input Volume	35	35
% of Volume	97	97
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	294.0	0.0	0.0	294.0
Denied Del/Veh (s)	1369.0	0.0	0.0	446.0
Total Delay (hr)	7.0	0.0	13.7	20.7
Total Del/Veh (s)	112.7	0.0	31.4	40.6
Stop Delay (hr)	7.5	0.0	11.1	18.6
Stop Del/Veh (s)	120.4	0.0	25.4	36.5
Vehicles Entered	217	39	1561	1817
Vehicles Exited	217	39	1558	1814
Hourly Exit Rate	217	39	1558	1814
Input Volume	735	35	4244	5014
% of Volume	30	111	37	36
Denied Entry Before	31	0	0	31
Denied Entry After	556	0	0	556

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	8.4	8.4
Total Del/Veh (s)	0.3	16.9	16.6
Stop Delay (hr)	0.0	8.1	8.1
Stop Del/Veh (s)	0.0	16.4	16.1
Vehicles Entered	39	1775	1814
Vehicles Exited	39	1768	1807
Hourly Exit Rate	39	1768	1807
Input Volume	35	4979	5014
% of Volume	111	36	36
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.4	1.6	12.0
Total Del/Veh (s)	0.7	41.4	6.8	23.9
Stop Delay (hr)	0.0	11.6	0.2	11.9
Stop Del/Veh (s)	0.0	46.5	0.9	23.6
Vehicles Entered	39	898	869	1806
Vehicles Exited	39	890	869	1798
Hourly Exit Rate	39	890	869	1798
Input Volume	35	2507	2472	5014
% of Volume	111	36	35	36
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0



#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	16.4	16.4
Total Del/Veh (s)	65.5	65.6
Stop Delay (hr)	18.7	18.7
Stop Del/Veh (s)	74.5	74.5
Vehicles Entered	890	890
Vehicles Exited	884	884
Hourly Exit Rate	884	884
Input Volume	2507	2507
% of Volume	35	35
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.2	19.5	19.7
Denied Del/Veh (s)	93.6	76.9	77.0
Total Delay (hr)	0.1	14.9	15.1
Total Del/Veh (s)	64.0	60.2	60.2
Stop Delay (hr)	0.2	17.4	17.6
Stop Del/Veh (s)	70.0	70.2	70.2
Vehicles Entered	8	876	884
Vehicles Exited	8	875	883
Hourly Exit Rate	8	875	883
Input Volume	35	2507	2542
% of Volume	23	35	35
Denied Entry Before	0	2	2
Denied Entry After	0	37	37

---

Total Network Performance

---

Denied Delay (hr)	1758.9
Denied Del/Veh (s)	1090.0
Total Delay (hr)	312.7
Total Del/Veh (s)	443.8
Stop Delay (hr)	287.8
Stop Del/Veh (s)	408.4
Vehicles Entered	2288
Vehicles Exited	2124
Hourly Exit Rate	2124
Input Volume	44058
% of Volume	5
Denied Entry Before	154
Denied Entry After	3521

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.3	20.3	0.1	11
Project Dwy	11	0.0	4.1	0.0	33
Stanley Boulevard	5	12.8	19.5	0.1	15
	37	1.7	9.9	0.1	30
Quandt Road	4	81.8	118.9	0.4	11
Total		96.5	172.8	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.4	20.8	0.2	26
	19	1.1	15.6	0.1	34
Greenvalley Drive	2	5.7	12.5	0.1	21
Reliez Valle Road	3	28.0	51.8	0.3	17
	20	14.3	18.0	0.0	7
Springhill Road	4	65.0	74.5	0.1	5
	37	198.8	234.1	0.4	6
Deer Hill Road	5	64.6	72.6	0.1	4
Project Dwy	11	31.6	40.1	0.1	7
Acalanes Avenue	14	17.6	21.7	0.0	6
	15	41.4	47.5	0.1	5
	16	65.5	74.9	0.1	5
	17	64.0	166.8	0.1	3
Mt. Diablo Boulevard	6	6.2	14.2	0.1	17
SR 24 EB Off Ramp	7	1.9	4.7	0.1	48
Total		611.1	869.5	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

AM PEAK  
08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	83	37	16
Average Queue (ft)	43	9	1
95th Queue (ft)	72	31	9
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	60	607	112	64	71
Average Queue (ft)	15	567	73	15	32
95th Queue (ft)	39	637	109	45	64
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		85	87		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		77		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	454	488	332	355
Average Queue (ft)	271	459	183	195
95th Queue (ft)	627	478	280	308
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	18	83		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				30
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

AM PEAK  
08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	365	272	24	512	519	96	208	214
Average Queue (ft)	337	235	3	379	380	71	103	125
95th Queue (ft)	354	256	15	625	640	139	241	277
Link Distance (ft)	318	217		406	406		127	127
Upstream Blk Time (%)	100	82		42	52		13	46
Queuing Penalty (veh)	0	0		502	621		153	551
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				56	58	0		
Queuing Penalty (veh)				0	133	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB	SB	B37	B37
Directions Served	L	LT	T	R	L	T	T	T	T	T
Maximum Queue (ft)	225	556	21	34	275	446	446	450	1878	2010
Average Queue (ft)	110	524	2	11	175	373	393	413	1622	1741
95th Queue (ft)	276	543	14	33	309	521	443	458	2450	2592
Link Distance (ft)		504	342	342		351	351	351	1832	1832
Upstream Blk Time (%)		96				26	36	40	20	76
Queuing Penalty (veh)		0				285	395	439	340	1267
Storage Bay Dist (ft)	185				175					
Storage Blk Time (%)	0	92			8	6		60		
Queuing Penalty (veh)	0	558			80	19		0		

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	7
Average Queue (ft)	0
95th Queue (ft)	6
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB	SB
Directions Served	R	T	T	TR
Maximum Queue (ft)	216	390	391	394
Average Queue (ft)	183	154	327	324
95th Queue (ft)	199	383	459	484
Link Distance (ft)	164	342	342	342
Upstream Blk Time (%)	100	2	14	11
Queuing Penalty (veh)	0	21	201	159
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	SB
Directions Served	T	T	T
Maximum Queue (ft)	166	267	238
Average Queue (ft)	34	230	174
95th Queue (ft)	110	305	277
Link Distance (ft)	152	152	152
Upstream Blk Time (%)	1	94	11
Queuing Penalty (veh)	10	1555	180
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 15: Pleasant Hill Road

Movement	SB	SB	SB
Directions Served	T	T	R
Maximum Queue (ft)	60	369	287
Average Queue (ft)	12	336	103
95th Queue (ft)	50	408	228
Link Distance (ft)	262	262	262
Upstream Blk Time (%)		96	0
Queuing Penalty (veh)		1586	5
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			



Intersection: 16: Pleasant Hill Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	540
Average Queue (ft)	512
95th Queue (ft)	545
Link Distance (ft)	302
Upstream Blk Time (%)	99
Queuing Penalty (veh)	1240
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 17: Pleasant Hill Road

Movement	SB	SB
Directions Served	T	TR
Maximum Queue (ft)	125	532
Average Queue (ft)	4	506
95th Queue (ft)	63	530
Link Distance (ft)	314	314
Upstream Blk Time (%)	0	99
Queuing Penalty (veh)	0	830
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Network Summary

Network wide Queuing Penalty: 11131
-------------------------------------

PHF = 0.75 (TJKM's assumption)

**Evac 1 + Project Variant**– Evacuation plus project, no trap lane, in the  
AM Peak

### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
No data recorded this interval.	

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by PHF.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6

### 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.3
Total Del/Veh (s)	3.9	7.2	4.4
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	3.0	5.4	3.4
Vehicles Entered	173	31	204
Vehicles Exited	174	31	205
Hourly Exit Rate	174	31	205
Input Volume	173	33	206
% of Volume	101	94	100
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 2: Pleasant Hill Road & Greenvally Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	20.0	0.3	20.3
Total Del/Veh (s)	3.4	148.1	5.0	97.5
Stop Delay (hr)	0.1	18.9	0.2	19.2
Stop Del/Veh (s)	3.6	140.1	3.3	91.8
Vehicles Entered	60	476	205	741
Vehicles Exited	60	462	204	726
Hourly Exit Rate	60	462	204	726
Input Volume	56	637	207	900
% of Volume	107	73	99	81
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	587.1	0.0	587.1
Denied Del/Veh (s)	1383.1	0.0	937.6
Total Delay (hr)	17.4	10.8	28.2
Total Del/Veh (s)	207.6	52.3	97.2
Stop Delay (hr)	17.6	9.3	26.9
Stop Del/Veh (s)	209.6	45.1	92.6
Vehicles Entered	290	726	1016
Vehicles Exited	284	714	998
Hourly Exit Rate	284	714	998
Input Volume	1499	900	2399
% of Volume	19	79	42
Denied Entry Before	8	0	8
Denied Entry After	1238	0	1238

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	355.8	29.6	4.4	0.0	0.0	0.0	389.8
Denied Del/Veh (s)	1474.0	367.2	397.6	0.0	0.0	0.0	638.7
Total Delay (hr)	9.9	7.8	1.1	0.1	32.8	2.8	54.5
Total Del/Veh (s)	191.0	122.8	130.0	87.9	130.5	99.5	134.8
Stop Delay (hr)	10.2	7.6	1.1	0.1	33.2	2.9	55.0
Stop Del/Veh (s)	197.1	119.8	126.3	85.6	131.8	101.7	136.0
Vehicles Entered	177	227	31	5	894	99	1433
Vehicles Exited	176	222	30	5	865	97	1395
Hourly Exit Rate	176	222	30	5	865	97	1395
Input Volume	857	297	45	5	2168	231	3603
% of Volume	21	75	67	100	40	42	39
Denied Entry Before	16	0	0	0	0	0	16
Denied Entry After	692	63	9	0	0	0	764

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	570.7	0.0	0.0	0.0	0.2	570.9
Denied Del/Veh (s)	1589.0	0.0	0.0	0.0	0.6	792.0
Total Delay (hr)	23.8	0.0	0.0	13.1	142.7	179.7
Total Del/Veh (s)	318.8	18.9	2.4	387.3	397.2	375.6
Stop Delay (hr)	23.6	0.0	0.0	12.6	140.5	176.7
Stop Del/Veh (s)	315.9	16.8	2.5	371.1	391.1	369.4
Vehicles Entered	243	5	33	112	1152	1545
Vehicles Exited	242	5	33	108	1123	1511
Hourly Exit Rate	242	5	33	108	1123	1511
Input Volume	1212	6	29	291	3032	4570
% of Volume	20	83	114	37	37	33
Denied Entry Before	72	0	0	0	0	72
Denied Entry After	1050	0	0	0	0	1050

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.4	4.4
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	10	10
Vehicles Exited	10	10
Hourly Exit Rate	10	10
Input Volume	35	35
% of Volume	29	29
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.7	1.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	35	35
Vehicles Exited	35	35
Hourly Exit Rate	35	35
Input Volume	35	35
% of Volume	100	100
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	420.6	0.0	0.0	420.6
Denied Del/Veh (s)	1907.0	0.0	0.0	688.9
Total Delay (hr)	7.9	0.0	8.2	16.2
Total Del/Veh (s)	1361.7	0.0	21.5	40.6
Stop Delay (hr)	8.0	0.0	4.7	12.6
Stop Del/Veh (s)	1366.8	0.0	12.2	31.7
Vehicles Entered	13	39	1365	1417
Vehicles Exited	12	39	1365	1416
Hourly Exit Rate	12	39	1365	1416
Input Volume	735	35	4244	5014
% of Volume	2	111	32	28
Denied Entry Before	61	0	0	61
Denied Entry After	781	0	0	781

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.8	4.8
Total Del/Veh (s)	0.2	12.4	12.1
Stop Delay (hr)	0.0	1.7	1.7
Stop Del/Veh (s)	0.0	4.3	4.2
Vehicles Entered	39	1377	1416
Vehicles Exited	39	1376	1415
Hourly Exit Rate	39	1376	1415
Input Volume	35	4979	5014
% of Volume	111	28	28
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.6	3.0	6.6
Total Del/Veh (s)	0.6	19.1	15.3	16.7
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.1	2.1
Vehicles Entered	39	676	701	1416
Vehicles Exited	39	676	701	1416
Hourly Exit Rate	39	676	701	1416
Input Volume	35	2507	2472	5014
% of Volume	111	27	28	28
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0



#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.2	1.2
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	676	676
Vehicles Exited	675	675
Hourly Exit Rate	675	675
Input Volume	2507	2507
% of Volume	27	27
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	1.0	1.0
Total Del/Veh (s)	6.9	5.0	5.1
Stop Delay (hr)	0.0	0.4	0.4
Stop Del/Veh (s)	1.0	2.0	2.0
Vehicles Entered	10	700	710
Vehicles Exited	10	699	709
Hourly Exit Rate	10	699	709
Input Volume	35	2507	2542
% of Volume	29	28	28
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

---

Total Network Performance

---

Denied Delay (hr)	2043.4
Denied Del/Veh (s)	1259.4
Total Delay (hr)	325.5
Total Del/Veh (s)	549.9
Stop Delay (hr)	305.5
Stop Del/Veh (s)	516.0
Vehicles Entered	1836
Vehicles Exited	1721
Hourly Exit Rate	1721
Input Volume	40731
% of Volume	4
Denied Entry Before	157
Denied Entry After	4005

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	34
Stanley Boulevard	5	18.9	26.8	0.1	11
Quandt Road	4	87.9	129.0	0.4	12
Total		107.0	180.0	0.6	12

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	7.2	22.7	0.2	24
	19	1.3	15.6	0.1	34
Greenvalley Drive	2	5.0	11.8	0.1	22
Reliez Valle Road	3	49.1	72.3	0.3	12
	20	26.2	29.9	0.0	4
Springhill Road	4	130.5	139.9	0.1	3
Deer Hill Road	5	360.6	399.0	0.4	4
Project Dwy	11	20.9	29.5	0.1	10
Acalanes Avenue	14	12.5	16.6	0.0	8
	15	19.1	25.3	0.1	9
	16	6.6	16.0	0.1	24
	17	6.9	16.3	0.1	16
Mt. Diablo Boulevard	6	4.4	12.9	0.1	19
SR 24 EB Off Ramp	7	1.7	4.5	0.1	49
Total		652.1	812.3	1.7	7

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

AM PEAK  
08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	91	41	22
Average Queue (ft)	45	11	1
95th Queue (ft)	75	34	9
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	51	611	114	53	79
Average Queue (ft)	14	566	74	11	29
95th Queue (ft)	35	656	113	34	66
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		84	87		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		76		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	455	481	425	447
Average Queue (ft)	218	456	230	228
95th Queue (ft)	582	471	381	408
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	21	97		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				41
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

AM PEAK  
08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	372	263	21	530	527	96	214	236
Average Queue (ft)	337	231	2	477	478	79	174	186
95th Queue (ft)	353	248	11	599	609	138	256	263
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	83		88	90		31	88
Queuing Penalty (veh)	0	0		1062	1077		368	1061
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				89	84	0		
Queuing Penalty (veh)				0	194	4		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	556	27	42	275	2273	2409
Average Queue (ft)	204	523	2	11	185	2245	2372
95th Queue (ft)	299	542	14	32	342	2275	2427
Link Distance (ft)		504	342	342		2220	2220
Upstream Blk Time (%)		95				42	95
Queuing Penalty (veh)		0				693	1585
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	8	97			6	27	69
Queuing Penalty (veh)	49	586			85	80	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	10
Average Queue (ft)	0
95th Queue (ft)	5
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB
Directions Served	R	T	TR
Maximum Queue (ft)	202	399	396
Average Queue (ft)	179	223	342
95th Queue (ft)	198	460	416
Link Distance (ft)	176	342	342
Upstream Blk Time (%)	100	2	8
Queuing Penalty (veh)	0	37	174
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB
Directions Served	T	T
Maximum Queue (ft)	186	264
Average Queue (ft)	50	226
95th Queue (ft)	147	279
Link Distance (ft)	150	150
Upstream Blk Time (%)	1	24
Queuing Penalty (veh)	19	590
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	353
Average Queue (ft)	165
95th Queue (ft)	408
Link Distance (ft)	266
Upstream Blk Time (%)	5
Queuing Penalty (veh)	112
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	



---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement SB

Directions Served TR  
Maximum Queue (ft) 184  
Average Queue (ft) 73  
95th Queue (ft) 144  
Link Distance (ft) 314  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Network Summary

---

Network wide Queuing Penalty: 7775

---

PHF = 1.0

**Evac 1** – Evacuation (without project) in the AM Peak

## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1829	1780	1769	1792	1766	1788
Vehs Exited	1731	1679	1706	1700	1710	1706
Starting Vehs	281	262	307	270	292	282
Ending Vehs	379	363	370	362	348	362
Denied Entry Before	111	105	100	89	97	101
Denied Entry After	1982	2023	2037	1992	2107	2029
Travel Distance (mi)	1600	1579	1608	1611	1609	1601
Travel Time (hr)	1351.0	1392.4	1406.7	1353.8	1407.4	1382.3
Total Delay (hr)	1295.1	1337.5	1350.7	1297.7	1351.6	1326.5
Total Stops	6213	6007	6125	6099	6108	6112
Fuel Used (gal)	348.4	356.7	360.7	349.6	362.3	355.5

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1829	1780	1769	1792	1766	1788
Vehs Exited	1731	1679	1706	1700	1710	1706
Starting Vehs	281	262	307	270	292	282
Ending Vehs	379	363	370	362	348	362
Denied Entry Before	111	105	100	89	97	101
Denied Entry After	1982	2023	2037	1992	2107	2029
Travel Distance (mi)	1600	1579	1608	1611	1609	1601
Travel Time (hr)	1351.0	1392.4	1406.7	1353.8	1407.4	1382.3
Total Delay (hr)	1295.1	1337.5	1350.7	1297.7	1351.6	1326.5
Total Stops	6213	6007	6125	6099	6108	6112
Fuel Used (gal)	348.4	356.7	360.7	349.6	362.3	355.5

### 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	5.4	3.8
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.7	4.1	2.9
Vehicles Entered	131	24	155
Vehicles Exited	131	24	155
Hourly Exit Rate	131	24	155
Input Volume	130	25	155
% of Volume	101	96	100
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 2: Pleasant Hill Road & Greenvally Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	11.9	0.2	12.2
Total Del/Veh (s)	2.8	90.1	5.4	64.9
Stop Delay (hr)	0.0	10.8	0.2	11.0
Stop Del/Veh (s)	3.0	81.4	3.7	58.4
Vehicles Entered	44	467	154	665
Vehicles Exited	44	461	155	660
Hourly Exit Rate	44	461	155	660
Input Volume	42	478	155	675
% of Volume	105	96	100	98
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	340.2	0.0	340.2
Denied Del/Veh (s)	1091.5	0.0	687.3
Total Delay (hr)	17.0	6.6	23.7
Total Del/Veh (s)	157.5	35.4	80.1
Stop Delay (hr)	16.8	5.4	22.2
Stop Del/Veh (s)	155.7	28.7	75.2
Vehicles Entered	376	660	1036
Vehicles Exited	369	660	1029
Hourly Exit Rate	369	660	1029
Input Volume	1124	675	1799
% of Volume	33	98	57
Denied Entry Before	6	0	6
Denied Entry After	746	0	746

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	256.6	6.0	1.0	0.0	0.0	0.0	263.6
Denied Del/Veh (s)	1364.6	96.2	92.9	0.0	0.0	0.0	482.6
Total Delay (hr)	10.0	6.9	1.2	0.1	31.9	2.8	52.9
Total Del/Veh (s)	206.2	114.7	114.1	99.9	122.7	94.6	128.9
Stop Delay (hr)	10.3	6.8	1.1	0.1	31.9	2.9	53.0
Stop Del/Veh (s)	212.2	111.7	110.2	97.4	122.8	95.7	129.3
Vehicles Entered	166	216	36	3	918	107	1446
Vehicles Exited	165	212	36	3	896	103	1415
Hourly Exit Rate	165	212	36	3	896	103	1415
Input Volume	643	223	34	4	1626	173	2703
% of Volume	26	95	106	75	55	60	52
Denied Entry Before	11	1	0	0	0	0	12
Denied Entry After	511	8	1	0	0	0	520

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	422.6	0.0	0.0	0.0	0.0	422.6
Denied Del/Veh (s)	1507.7	0.0	0.0	0.0	0.0	659.7
Total Delay (hr)	24.0	0.0	0.0	13.3	141.8	179.2
Total Del/Veh (s)	315.9	29.4	3.3	380.3	396.7	377.1
Stop Delay (hr)	23.9	0.0	0.0	12.7	138.9	175.6
Stop Del/Veh (s)	313.5	27.4	3.4	363.3	388.7	369.4
Vehicles Entered	246	4	21	115	1157	1543
Vehicles Exited	248	3	22	112	1123	1508
Hourly Exit Rate	248	3	22	112	1123	1508
Input Volume	909	4	22	218	2274	3427
% of Volume	27	75	100	51	49	44
Denied Entry Before	83	0	0	0	0	83
Denied Entry After	763	0	0	0	0	763

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.5	4.5
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	12	12
Vehicles Exited	12	12
Hourly Exit Rate	12	12
Input Volume	26	26
% of Volume	46	46
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.8	1.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.2	0.2
Vehicles Entered	29	29
Vehicles Exited	29	29
Hourly Exit Rate	29	29
Input Volume	26	26
% of Volume	112	112
Denied Entry Before	0	0
Denied Entry After	0	0

14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.5	4.5
Total Del/Veh (s)	0.2	11.9	11.7
Stop Delay (hr)	0.0	1.4	1.4
Stop Del/Veh (s)	0.0	3.8	3.7
Vehicles Entered	25	1372	1397
Vehicles Exited	25	1372	1397
Hourly Exit Rate	25	1372	1397
Input Volume	26	3183	3209
% of Volume	96	43	44
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.5
Total Del/Veh (s)	0.6	19.0	15.1	16.8
Stop Delay (hr)	0.0	0.4	0.4	0.9
Stop Del/Veh (s)	0.0	2.3	2.3	2.3
Vehicles Entered	25	689	683	1397
Vehicles Exited	25	689	683	1397
Hourly Exit Rate	25	689	683	1397
Input Volume	26	1605	1578	3209
% of Volume	96	43	43	44
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	689	689
Vehicles Exited	689	689
Hourly Exit Rate	689	689
Input Volume	1605	1605
% of Volume	43	43
Denied Entry Before	0	0
Denied Entry After	0	0



### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0
Total Delay (hr)	0.0	1.0	1.1
Total Del/Veh (s)	7.8	5.3	5.3
Stop Delay (hr)	0.0	0.4	0.4
Stop Del/Veh (s)	1.8	2.1	2.1
Vehicles Entered	12	705	717
Vehicles Exited	12	704	716
Hourly Exit Rate	12	704	716
Input Volume	26	1605	1631
% of Volume	46	44	44
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### Total Network Performance

Denied Delay (hr)	1027.1
Denied Del/Veh (s)	968.7
Total Delay (hr)	299.5
Total Del/Veh (s)	521.3
Stop Delay (hr)	277.9
Stop Del/Veh (s)	483.8
Vehicles Entered	1788
Vehicles Exited	1706
Hourly Exit Rate	1706
Input Volume	27792
% of Volume	6
Denied Entry Before	101
Denied Entry After	2029

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.1	0.1	11
	11	0.0	4.0	0.0	34
Stanley Boulevard	5	29.4	36.5	0.1	8
Quandt Road	4	99.9	148.7	0.4	11
Total		129.5	209.3	0.6	11

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.4	20.6	0.2	27
	19	0.9	16.0	0.1	33
Greenvalley Drive	2	5.4	12.3	0.1	21
Reliez Valle Road	3	31.8	55.7	0.3	16
	20	23.5	27.1	0.0	4
Springhill Road	4	122.7	132.1	0.1	3
Deer Hill Road	5	365.6	404.1	0.4	4
	11	19.1	27.7	0.1	10
Acalanes Avenue	14	11.9	15.9	0.0	9
	15	19.0	25.1	0.1	9
	16	6.6	16.0	0.1	24
	17	7.8	16.2	0.1	16
Mt. Diablo Boulevard	6	4.5	12.4	0.1	20
SR 24 EB Off Ramp	7	1.8	4.6	0.1	49
Total		625.8	785.8	1.7	8

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	68	32	11
Average Queue (ft)	37	6	0
95th Queue (ft)	65	25	5
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	34	562	73	47	71
Average Queue (ft)	9	413	19	9	26
95th Queue (ft)	24	637	74	32	58
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		22	12		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		67		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	454	486	339	344
Average Queue (ft)	237	456	177	175
95th Queue (ft)	599	474	273	281
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	24	94		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				26
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	368	254	15	521	527	96	212	215
Average Queue (ft)	336	227	1	470	472	76	161	179
95th Queue (ft)	353	257	8	597	611	140	252	267
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	99	70		83	87		22	82
Queuing Penalty (veh)	0	0		748	784		202	736
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				86	82	0		
Queuing Penalty (veh)				0	142	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	547	23	38	275	2273	2408
Average Queue (ft)	210	523	3	9	173	2241	2368
95th Queue (ft)	283	537	15	30	328	2310	2462
Link Distance (ft)		504	347	347		2220	2220
Upstream Blk Time (%)		95				42	95
Queuing Penalty (veh)		0				520	1178
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	8	97			4	26	66
Queuing Penalty (veh)	36	441			51	56	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

---

Movement	SB
Directions Served	T
Maximum Queue (ft)	5
Average Queue (ft)	0
95th Queue (ft)	3
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	B11	B11
Directions Served	T	T	T	T
Maximum Queue (ft)	167	258	387	387
Average Queue (ft)	36	209	196	337
95th Queue (ft)	119	296	420	420
Link Distance (ft)	147	147	347	347
Upstream Blk Time (%)	1	20	1	6
Queuing Penalty (veh)	9	324	13	99
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 15: Pleasant Hill Road

Movement	SB	SB
Directions Served	T	TR
Maximum Queue (ft)	11	354
Average Queue (ft)	0	191
95th Queue (ft)	8	441
Link Distance (ft)	266	266
Upstream Blk Time (%)		6
Queuing Penalty (veh)		94
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement

SB

SB

Directions Served

T

TR

Maximum Queue (ft)

14

165

Average Queue (ft)

0

75

95th Queue (ft)

10

147

Link Distance (ft)

314

314

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

---

Network Summary

---

Network wide Queuing Penalty: 5435

PHF = 1.0

**Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM  
Peak



# SimTraffic Simulation Summary

## Evacuation Scenario 1 plus Project

08/23/2020

### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	2313	2278	2198	2250	2209	2249
Vehs Exited	2165	2144	2089	2068	2058	2105
Starting Vehs	258	231	256	249	270	256
Ending Vehs	406	365	365	431	421	397
Denied Entry Before	144	167	171	169	170	165
Denied Entry After	2127	2179	2246	2233	2121	2181
Travel Distance (mi)	1976	1959	1927	1894	1879	1927
Travel Time (hr)	1489.0	1424.4	1515.3	1507.4	1458.8	1479.0
Total Delay (hr)	1419.8	1355.7	1448.0	1441.1	1392.7	1411.4
Total Stops	9117	8435	8871	8651	8322	8680
Fuel Used (gal)	391.0	376.5	395.1	393.7	380.7	387.4

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	2313	2278	2198	2250	2209	2249
Vehs Exited	2165	2144	2089	2068	2058	2105
Starting Vehs	258	231	256	249	270	256
Ending Vehs	406	365	365	431	421	397
Denied Entry Before	144	167	171	169	170	165
Denied Entry After	2127	2179	2246	2233	2121	2181
Travel Distance (mi)	1976	1959	1927	1894	1879	1927
Travel Time (hr)	1489.0	1424.4	1515.3	1507.4	1458.8	1479.0
Total Delay (hr)	1419.8	1355.7	1448.0	1441.1	1392.7	1411.4
Total Stops	9117	8435	8871	8651	8322	8680
Fuel Used (gal)	391.0	376.5	395.1	393.7	380.7	387.4

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.1	0.1
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	5.8	3.9
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.8	4.2	3.0
Vehicles Entered	133	23	156
Vehicles Exited	133	23	156
Hourly Exit Rate	133	23	156
Input Volume	130	25	155
% of Volume	102	92	101
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	13.6	0.2	13.9
Total Del/Veh (s)	2.7	101.7	5.2	73.8
Stop Delay (hr)	0.0	12.5	0.2	12.7
Stop Del/Veh (s)	3.0	93.2	3.6	67.3
Vehicles Entered	39	469	156	664
Vehicles Exited	38	463	156	657
Hourly Exit Rate	38	463	156	657
Input Volume	42	478	155	675
% of Volume	90	97	101	97
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	183.4	0.0	183.4
Denied Del/Veh (s)	578.6	0.0	367.2
Total Delay (hr)	14.4	4.6	19.0
Total Del/Veh (s)	72.8	24.8	49.4
Stop Delay (hr)	12.4	3.6	15.9
Stop Del/Veh (s)	62.7	19.0	41.5
Vehicles Entered	698	657	1355
Vehicles Exited	692	658	1350
Hourly Exit Rate	692	658	1350
Input Volume	1124	675	1799
% of Volume	62	97	75
Denied Entry Before	8	0	8
Denied Entry After	443	0	443

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	277.0	0.8	0.1	0.0	0.0	0.0	278.0
Denied Del/Veh (s)	1445.2	13.3	15.6	0.0	0.0	0.0	434.5
Total Delay (hr)	9.2	5.0	0.8	0.1	21.5	1.9	38.4
Total Del/Veh (s)	221.2	78.3	84.8	80.9	62.7	52.3	77.8
Stop Delay (hr)	9.4	4.7	0.8	0.1	19.1	1.8	35.9
Stop Del/Veh (s)	226.4	74.7	80.3	80.3	55.8	49.2	72.6
Vehicles Entered	141	226	34	4	1220	129	1754
Vehicles Exited	141	225	33	4	1196	127	1726
Hourly Exit Rate	141	225	33	4	1196	127	1726
Input Volume	643	223	34	4	1626	173	2703
% of Volume	22	101	97	100	74	73	64
Denied Entry Before	40	0	0	0	0	0	40
Denied Entry After	549	0	0	0	0	0	549

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	429.5	0.0	0.0	0.0	0.0	429.5
Denied Del/Veh (s)	1546.1	0.0	0.0	0.0	0.0	619.4
Total Delay (hr)	22.1	0.0	0.0	3.5	24.5	50.2
Total Del/Veh (s)	326.7	19.3	3.6	95.9	64.4	101.8
Stop Delay (hr)	21.8	0.0	0.0	3.3	21.3	46.4
Stop Del/Veh (s)	323.3	17.4	3.8	89.6	55.8	94.2
Vehicles Entered	218	4	22	129	1341	1714
Vehicles Exited	218	4	22	131	1342	1717
Hourly Exit Rate	218	4	22	131	1342	1717
Input Volume	909	4	22	218	2274	3427
% of Volume	24	100	100	60	59	50
Denied Entry Before	82	0	0	0	0	82
Denied Entry After	782	0	0	0	0	782

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	5.8	5.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	7	7
Vehicles Exited	7	7
Hourly Exit Rate	7	7
Input Volume	26	26
% of Volume	27	27
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.9	1.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.3	0.3
Vehicles Entered	31	31
Vehicles Exited	31	31
Hourly Exit Rate	31	31
Input Volume	26	26
% of Volume	119	119
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	205.8	0.0	0.0	205.8
Denied Del/Veh (s)	1266.7	0.0	0.0	341.3
Total Delay (hr)	7.0	0.0	14.4	21.3
Total Del/Veh (s)	115.4	0.0	32.9	42.3
Stop Delay (hr)	7.4	0.0	11.8	19.2
Stop Del/Veh (s)	123.2	0.0	27.0	38.1
Vehicles Entered	211	26	1560	1797
Vehicles Exited	210	26	1556	1792
Hourly Exit Rate	210	26	1556	1792
Input Volume	551	26	3183	3760
% of Volume	38	100	49	48
Denied Entry Before	31	0	0	31
Denied Entry After	374	0	0	374

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	8.6	8.6
Total Del/Veh (s)	0.2	17.6	17.3
Stop Delay (hr)	0.0	8.4	8.4
Stop Del/Veh (s)	0.0	17.2	16.9
Vehicles Entered	26	1766	1792
Vehicles Exited	26	1758	1784
Hourly Exit Rate	26	1758	1784
Input Volume	26	3734	3760
% of Volume	100	47	47
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.7	1.6	12.3
Total Del/Veh (s)	0.6	42.8	6.6	24.6
Stop Delay (hr)	0.0	12.0	0.2	12.2
Stop Del/Veh (s)	0.0	48.3	0.8	24.5
Vehicles Entered	26	889	869	1784
Vehicles Exited	26	882	870	1778
Hourly Exit Rate	26	882	870	1778
Input Volume	26	1880	1854	3760
% of Volume	100	47	47	47
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	16.6	16.6
Total Del/Veh (s)	66.3	66.3
Stop Delay (hr)	18.9	18.9
Stop Del/Veh (s)	75.5	75.5
Vehicles Entered	882	882
Vehicles Exited	882	882
Hourly Exit Rate	882	882
Input Volume	1880	1880
% of Volume	47	47
Denied Entry Before	0	0
Denied Entry After	0	0

### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.2	14.9	15.2
Denied Del/Veh (s)	106.7	59.3	59.7
Total Delay (hr)	0.1	15.0	15.1
Total Del/Veh (s)	59.2	60.5	60.4
Stop Delay (hr)	0.1	17.5	17.6
Stop Del/Veh (s)	63.0	70.6	70.5
Vehicles Entered	7	876	883
Vehicles Exited	7	875	882
Hourly Exit Rate	7	875	882
Input Volume	26	1880	1906
% of Volume	27	47	46
Denied Entry Before	0	2	2
Denied Entry After	1	30	31

---

Total Network Performance

---

Denied Delay (hr)	1113.6
Denied Del/Veh (s)	905.0
Total Delay (hr)	297.8
Total Del/Veh (s)	428.5
Stop Delay (hr)	274.0
Stop Del/Veh (s)	394.3
Vehicles Entered	2249
Vehicles Exited	2105
Hourly Exit Rate	2105
Input Volume	33042
% of Volume	6
Denied Entry Before	165
Denied Entry After	2181



Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	33
Stanley Boulevard	5	19.3	27.1	0.1	10
	37	1.8	9.7	0.1	31
Quandt Road	4	80.9	116.6	0.4	11
Total		102.1	177.8	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.8	21.2	0.2	26
	19	1.0	16.4	0.1	33
Greenvalley Drive	2	5.2	12.0	0.1	21
Reliez Valle Road	3	20.2	43.9	0.3	21
	20	11.5	15.1	0.0	8
Springhill Road	4	62.7	72.2	0.1	5
	37	196.3	231.5	0.4	6
Deer Hill Road	5	64.4	72.3	0.1	4
Project Dwy	11	33.0	41.4	0.1	7
Acalanes Avenue	14	18.2	22.3	0.0	6
	15	42.8	48.9	0.1	5
	16	66.3	75.6	0.1	5
	17	59.2	189.6	0.1	4
Mt. Diablo Boulevard	6	5.8	13.5	0.1	18
SR 24 EB Off Ramp	7	1.9	4.7	0.1	48
Total		594.2	880.6	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	76	46	16
Average Queue (ft)	39	7	1
95th Queue (ft)	64	28	7
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	34	585	84	47	61
Average Queue (ft)	10	446	27	10	23
95th Queue (ft)	26	659	87	31	52
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		32	26		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		70		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	467	487	270	294
Average Queue (ft)	281	459	147	161
95th Queue (ft)	634	478	215	228
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	17	80		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				20
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	368	258	15	506	515	96	212	229
Average Queue (ft)	336	211	2	375	383	62	94	130
95th Queue (ft)	353	278	10	632	651	137	222	278
Link Distance (ft)	318	217		406	406		127	127
Upstream Blk Time (%)	100	32		37	51		8	41
Queuing Penalty (veh)	0	0		337	458		69	371
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				56	57	0		
Queuing Penalty (veh)				0	98	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB	SB	B37	B37
Directions Served	L	LT	T	R	L	T	T	T	T	T
Maximum Queue (ft)	225	550	22	43	275	442	447	441	1884	2009
Average Queue (ft)	108	522	2	8	174	366	392	410	1590	1711
95th Queue (ft)	271	536	13	29	316	523	454	467	2522	2656
Link Distance (ft)		504	342	342		351	351	351	1832	1832
Upstream Blk Time (%)		96				23	33	41	21	76
Queuing Penalty (veh)		0				193	278	337	260	943
Storage Bay Dist (ft)	185				175					
Storage Blk Time (%)		92			9	4		60		
Queuing Penalty (veh)		418			69	9		0		

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

---

Movement	SB
Directions Served	T
Maximum Queue (ft)	5
Average Queue (ft)	0
95th Queue (ft)	4
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

---

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

---

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB	SB
Directions Served	R	T	T	TR
Maximum Queue (ft)	218	395	389	391
Average Queue (ft)	184	156	346	337
95th Queue (ft)	201	366	416	447
Link Distance (ft)	164	342	342	342
Upstream Blk Time (%)	100	2	15	10
Queuing Penalty (veh)	0	17	158	109
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	SB
Directions Served	T	T	T
Maximum Queue (ft)	164	267	237
Average Queue (ft)	36	237	184
95th Queue (ft)	122	258	270
Link Distance (ft)	152	152	152
Upstream Blk Time (%)	1	97	11
Queuing Penalty (veh)	12	1208	140
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 15: Pleasant Hill Road

Movement	SB	SB	SB
Directions Served	T	T	R
Maximum Queue (ft)	56	370	283
Average Queue (ft)	11	341	106
95th Queue (ft)	47	363	244
Link Distance (ft)	262	262	262
Upstream Blk Time (%)		99	0
Queuing Penalty (veh)		1230	5
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 16: Pleasant Hill Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	542
Average Queue (ft)	512
95th Queue (ft)	534
Link Distance (ft)	302
Upstream Blk Time (%)	100
Queuing Penalty (veh)	939
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 17: Pleasant Hill Road

Movement	SB	SB
Directions Served	T	TR
Maximum Queue (ft)	188	535
Average Queue (ft)	15	505
95th Queue (ft)	123	526
Link Distance (ft)	314	314
Upstream Blk Time (%)	0	99
Queuing Penalty (veh)	0	622
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Network Summary

Network wide Queuing Penalty: 8283
------------------------------------

PHF = 1.0

**Evac 1 + Project Variant**– Evacuation plus project, no trap lane, in the  
AM Peak



SimTraffic Simulation Summary  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1718	1770	1818	1793	1804	1781
Vehs Exited	1667	1680	1753	1687	1699	1696
Starting Vehs	332	280	318	278	287	299
Ending Vehs	383	370	383	384	392	380
Denied Entry Before	188	149	166	161	143	161
Denied Entry After	2724	2604	2474	2543	2560	2582
Travel Distance (mi)	1573	1588	1620	1618	1608	1601
Travel Time (hr)	1799.8	1669.5	1677.1	1653.3	1680.2	1696.0
Total Delay (hr)	1745.0	1614.2	1620.7	1597.2	1624.2	1640.3
Total Stops	6005	6096	6145	6278	6138	6134
Fuel Used (gal)	447.6	420.7	423.1	417.9	422.6	426.4

Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1718	1770	1818	1793	1804	1781
Vehs Exited	1667	1680	1753	1687	1699	1696
Starting Vehs	332	280	318	278	287	299
Ending Vehs	383	370	383	384	392	380
Denied Entry Before	188	149	166	161	143	161
Denied Entry After	2724	2604	2474	2543	2560	2582
Travel Distance (mi)	1573	1588	1620	1618	1608	1601
Travel Time (hr)	1799.8	1669.5	1677.1	1653.3	1680.2	1696.0
Total Delay (hr)	1745.0	1614.2	1620.7	1597.2	1624.2	1640.3
Total Stops	6005	6096	6145	6278	6138	6134
Fuel Used (gal)	447.6	420.7	423.1	417.9	422.6	426.4

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	6.8	4.0
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.7	5.1	3.1
Vehicles Entered	135	26	161
Vehicles Exited	135	26	161
Hourly Exit Rate	135	26	161
Input Volume	130	25	155
% of Volume	104	104	104
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.7	0.2	11.0
Total Del/Veh (s)	3.2	82.0	5.0	58.4
Stop Delay (hr)	0.0	9.6	0.2	9.8
Stop Del/Veh (s)	3.4	73.3	3.4	52.0
Vehicles Entered	45	457	160	662
Vehicles Exited	45	454	159	658
Hourly Exit Rate	45	454	159	658
Input Volume	42	478	155	675
% of Volume	107	95	103	97
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	366.7	0.0	366.7
Denied Del/Veh (s)	1156.1	0.0	733.9
Total Delay (hr)	17.0	7.7	24.7
Total Del/Veh (s)	170.9	41.0	86.2
Stop Delay (hr)	17.1	6.4	23.4
Stop Del/Veh (s)	171.0	34.2	81.8
Vehicles Entered	348	657	1005
Vehicles Exited	340	655	995
Hourly Exit Rate	340	655	995
Input Volume	1124	675	1799
% of Volume	30	97	55
Denied Entry Before	12	0	12
Denied Entry After	794	0	794

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	232.9	5.0	0.9	0.0	0.0	0.0	238.9
Denied Del/Veh (s)	1302.1	78.2	89.6	0.0	0.0	0.0	450.7
Total Delay (hr)	9.8	6.7	1.2	0.1	32.7	3.0	53.4
Total Del/Veh (s)	181.3	106.8	120.8	81.7	129.3	109.9	131.2
Stop Delay (hr)	10.2	6.5	1.1	0.1	32.9	3.0	53.8
Stop Del/Veh (s)	187.4	103.4	116.2	79.8	130.5	111.8	132.2
Vehicles Entered	186	223	35	5	894	97	1440
Vehicles Exited	185	220	35	5	869	93	1407
Hourly Exit Rate	185	220	35	5	869	93	1407
Input Volume	643	223	34	4	1626	173	2703
% of Volume	29	99	103	125	53	54	52
Denied Entry Before	15	0	0	0	0	0	15
Denied Entry After	458	9	1	0	0	0	468

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	392.5	0.0	0.0	0.0	0.0	392.5
Denied Del/Veh (s)	1474.8	0.0	0.0	0.0	0.0	625.7
Total Delay (hr)	24.1	0.0	0.0	13.2	142.1	179.4
Total Del/Veh (s)	329.5	21.8	2.9	374.4	394.4	377.1
Stop Delay (hr)	23.9	0.0	0.0	12.5	139.4	175.8
Stop Del/Veh (s)	327.1	19.9	3.0	354.8	386.9	369.6
Vehicles Entered	238	5	21	115	1159	1538
Vehicles Exited	235	5	21	113	1132	1506
Hourly Exit Rate	235	5	21	113	1132	1506
Input Volume	909	4	22	218	2274	3427
% of Volume	26	125	95	52	50	44
Denied Entry Before	69	0	0	0	0	69
Denied Entry After	720	0	0	0	0	720

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.9	4.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	8	8
Vehicles Exited	8	8
Hourly Exit Rate	8	8
Input Volume	26	26
% of Volume	31	31
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.7	1.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	23	23
Vehicles Exited	23	23
Hourly Exit Rate	23	23
Input Volume	26	26
% of Volume	88	88
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	333.1	0.0	0.0	333.1
Denied Del/Veh (s)	1956.2	0.0	0.0	598.1
Total Delay (hr)	8.0	0.0	8.0	16.1
Total Del/Veh (s)	1374.8	0.0	21.0	40.7
Stop Delay (hr)	8.1	0.0	4.5	12.5
Stop Del/Veh (s)	1380.2	0.0	11.7	31.7
Vehicles Entered	13	25	1367	1405
Vehicles Exited	13	25	1368	1406
Hourly Exit Rate	13	25	1368	1406
Input Volume	551	26	3183	3760
% of Volume	2	96	43	37
Denied Entry Before	65	0	0	65
Denied Entry After	600	0	0	600

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.7	4.7
Total Del/Veh (s)	0.2	12.3	12.1
Stop Delay (hr)	0.0	1.6	1.6
Stop Del/Veh (s)	0.0	4.0	4.0
Vehicles Entered	25	1381	1406
Vehicles Exited	25	1382	1407
Hourly Exit Rate	25	1382	1407
Input Volume	26	3734	3760
% of Volume	96	37	37
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.6
Total Del/Veh (s)	0.6	19.0	15.3	16.8
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.1	2.1
Vehicles Entered	25	694	688	1407
Vehicles Exited	25	697	686	1408
Hourly Exit Rate	25	697	686	1408
Input Volume	26	1880	1854	3760
% of Volume	96	37	37	37
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	697	697
Vehicles Exited	697	697
Hourly Exit Rate	697	697
Input Volume	1880	1880
% of Volume	37	37
Denied Entry Before	0	0
Denied Entry After	0	0

### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	1.0	1.0
Total Del/Veh (s)	7.6	4.8	4.8
Stop Delay (hr)	0.0	0.3	0.3
Stop Del/Veh (s)	1.2	1.7	1.7
Vehicles Entered	8	716	724
Vehicles Exited	8	714	722
Hourly Exit Rate	8	714	722
Input Volume	26	1880	1906
% of Volume	31	38	38
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

---

Total Network Performance

---

Denied Delay (hr)	1331.4
Denied Del/Veh (s)	1098.6
Total Delay (hr)	308.8
Total Del/Veh (s)	535.6
Stop Delay (hr)	287.7
Stop Del/Veh (s)	499.0
Vehicles Entered	1781
Vehicles Exited	1696
Hourly Exit Rate	1696
Input Volume	30546
% of Volume	6
Denied Entry Before	161
Denied Entry After	2582



Arterial Level of Service  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	34
Stanley Boulevard	5	21.8	29.1	0.1	10
Quandt Road	4	81.7	122.2	0.4	13
Total		103.8	175.6	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	6.8	22.1	0.2	25
	19	1.2	15.8	0.1	34
Greenvalley Drive	2	5.0	11.9	0.1	22
Reliez Valle Road	3	37.7	61.6	0.3	15
	20	24.4	28.0	0.0	4
Springhill Road	4	129.3	138.7	0.1	3
Deer Hill Road	5	358.8	396.8	0.4	4
Project Dwy	11	20.5	29.0	0.1	10
Acalanes Avenue	14	12.4	16.4	0.0	8
	15	19.0	25.1	0.1	9
	16	6.6	16.0	0.1	24
	17	7.6	17.2	0.1	15
Mt. Diablo Boulevard	6	4.9	13.5	0.1	18
SR 24 EB Off Ramp	7	1.7	4.5	0.1	50
Total		635.7	796.7	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	77	45	16
Average Queue (ft)	38	8	1
95th Queue (ft)	63	30	7
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	44	567	56	50	64
Average Queue (ft)	11	385	10	9	25
95th Queue (ft)	29	611	51	31	57
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		12	5		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		63		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	459	488	358	394
Average Queue (ft)	253	456	187	189
95th Queue (ft)	615	491	312	337
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	27	94		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				28
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	369	258	16	526	525	96	207	220
Average Queue (ft)	338	223	2	476	476	76	164	183
95th Queue (ft)	355	265	9	581	604	140	245	262
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	64		86	90		24	85
Queuing Penalty (veh)	0	0		775	809		213	762
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				89	84	0		
Queuing Penalty (veh)				0	145	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	547	28	29	275	2274	2410
Average Queue (ft)	212	521	3	8	192	2241	2371
95th Queue (ft)	276	536	15	28	344	2292	2451
Link Distance (ft)		504	342	342		2220	2220
Upstream Blk Time (%)		95				41	95
Queuing Penalty (veh)		0				506	1182
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	11	97			4	30	68
Queuing Penalty (veh)	52	440			47	64	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	2
Average Queue (ft)	0
95th Queue (ft)	2
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB
----------	----	----	----

Directions Served	R	T	TR
-------------------	---	---	----

Maximum Queue (ft)	204	392	380
--------------------	-----	-----	-----

Average Queue (ft)	180	212	338
--------------------	-----	-----	-----

95th Queue (ft)	199	435	410
-----------------	-----	-----	-----

Link Distance (ft)	176	342	342
--------------------	-----	-----	-----

Upstream Blk Time (%)	100	1	7
-----------------------	-----	---	---

Queuing Penalty (veh)	0	23	114
-----------------------	---	----	-----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB
Directions Served	T	T
Maximum Queue (ft)	180	257
Average Queue (ft)	48	214
95th Queue (ft)	146	294
Link Distance (ft)	150	150
Upstream Blk Time (%)	1	22
Queuing Penalty (veh)	15	409
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	351
Average Queue (ft)	179
95th Queue (ft)	424
Link Distance (ft)	266
Upstream Blk Time (%)	5
Queuing Penalty (veh)	89
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement SB

Directions Served TR  
Maximum Queue (ft) 161  
Average Queue (ft) 67  
95th Queue (ft) 128  
Link Distance (ft) 314  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Network Summary

---

Network wide Queuing Penalty: 5648

---

# EXHIBIT B



# Lamorinda Program Management Committee

October 24, 2013

RECEIVED

OCT 25 2013

CITY OF LAFAYETTE  
ENGINEERING DEPT

City of Lafayette  
Attn: Greg Wolff, Senior Planner  
3675 Mt. Diablo Blvd, Suite 210  
Lafayette, CA 94549

Dear Greg:

The Lamorinda Program Management Committee (LPMC), at its regular meeting on Monday, October 7, 2013, reviewed the Terraces project in Lafayette (Agenda Item 5.a). Present were member Amy Worth of Orinda, and vice-chair Mike Metcalf, who chaired the meeting. Chair Don Tatzin recused himself from the meeting.

LPMC Staff from the City of Lafayette provided the following background on the Terraces project:

- The project consists of 315 apartment units located in the northwest quadrant of the SR 24/Pleasant Hill Road interchange.
- The City of Lafayette recently certified the Final Environmental Impact Report for the project.
- Lafayette staff notified the LPMC and adjacent Regional Transportation Planning Committees about the Terraces Project because forecast traffic generated by the project would exceed the 50 net-new-peak-hour-vehicle-trip threshold established in the adopted 2009 Lamorinda Action Plan [Adopted December 7, 2009, p. 32] for notification to LPMC and informational discussion about the project.

Lafayette staff noted that one of the traffic impact mitigations proposed by the applicant is to add a third through-lane to the existing two southbound lanes on Pleasant Hill Road in the southbound direction, from north of Deer Hill Road to the State Route 24 westbound onramp.

LPMC discussed the impacts of the proposed project. Following staff's presentation, Contra Costa Transportation Authority (CCTA) staff provided background information on the Measure J Growth Management Program requirements for multi-jurisdictional cooperative planning. CCTA staff explained

---

Lafayette • Moraga • Orinda

Attachment 3

## Lamorinda Program Management Committee

---

the LPMC's role in the discussion and review of the project, noting that the Lamorinda Action Plan identifies Pleasant Hill Road as a Route of Regional significance. Since the project exceeds the trip threshold identified in the Lamorinda Action Plan, the LPMC should make a determination as to whether the proposed project would adversely affect the sub-region's ability to meet the objectives in the Action Plan and whether it is consistent with adopted Action Plan policy.

Members of the public were asked to speak. David Bowie representing the applicant, spoke about the project.

During the discussion, it was also noted that one of the proposed mitigations for the project – the widening of southbound Pleasant Hill Road – could conflict with the Gateway Constraint Policy in the Lamorinda Action Plan [pp. 23-25]. This policy limits the width of Pleasant Hill Road to two through-lanes.

After significant discussion, the LPMC agreed to transmit the following statement to the City of Lafayette by letter:

*It appears from the information presented today that one of the proposed mitigations for the Terraces Project – to widen southbound Pleasant Hill Road from two to three lanes from north of Deer Hill Road to the westbound SR 24 onramp – is inconsistent with the Gateway Constraints Policy of the adopted Lamorinda Action Plan.*

The statement was agreed upon with a motion by Amy Worth, and a second by Michael Metcalf.

Please feel free to contact me or our LPMC staff member, Shawna Brekke-Read, if you have any questions.

Sincerely,



Michael Metcalf

cc: Lafayette City Council  
Leah Greenblat, City of Lafayette  
Martin Engelmann, CCTA  
LPMC and LPMC TAC  
SWAT and SWAT TAC

## Jason Chen

---

**From:** Colin Elliott <colin@chelliott.com>  
**Sent:** Sunday, December 6, 2020 7:48 PM  
**To:** Jason Chen  
**Cc:** 'Gerringer, Teresa'  
**Subject:** LPMC - December 7, 2020 Meeting Agenda Item 6. Proposed Amendment to Lamorinda Action Plan Gateway Constraint Policy for Pleasant Hill Road

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

Dear Jason

I'm writing to object to Item 6 in the Agenda for Monday's meeting. Information on this was just forwarded to me by another resident of NE Lafayette. I can find no agenda or staff report for this proposal on the SWAT/LMPC website. Your website is, in fact, completely out of date! Is there a staff report? If so perhaps you could forward it to me. There appears to have been no notice or communications regarding this import change in policy given to the residents of Lafayette who will be most affected! I do not believe this policy change has even been the subject of a public hearing in the City of Lafayette yet.

A change like this will have the effect of drawing more traffic to Pleasant Hill Road from I-680 because of traffic apps like Waze and Apple maps. This needs to be studied.

If this policy change is solely because of the proposed Terraces of Lafayette project, then it is premature. That project is currently tied up in a CEQA lawsuit which will likely require parts if not all of the EIR to be re-done. The traffic impacts and impacts on emergency evacuations are among the topics that will probably require further study. Ultimately, the project may not ever get developed. The current zoning and General Plan designations for that site allow low density residential, which do not require a change to the Gateway Policy.

Sincerely

Colin Elliott

Reliez Valley, Lafayette

## Jason Chen

---

**From:** Jenifer Lamken Paul <jenlamkenpaul@hotmail.com>  
**Sent:** Sunday, December 6, 2020 11:55 PM  
**To:** Jason Chen; lbobadilla@sanramon.ca.gov  
**Subject:** Item 6, LPMC Meeting December 7, 2020

**CAUTION: This email is from an external source. Be careful when clicking links or opening attachments!**

Dear Members of the Lamorinda Program Management Committee,

I am writing to you to oppose the amendment to the Gateway Constraint Policy, Item 6 on the agenda for your meeting on Monday, December 7th, 2020.

In 2013, the firm TJKM studied the addition of the southbound lane and beyond the obvious that it conflicted with the Gateway Constraints Policy, they found several negative potential impacts. For example:

- \*It would increase the pedestrian crossing distance on the Pleasant Hill Road crosswalk at the Deer Hill Road – Stanley Boulevard signal, which a high volume of Acalanes High School students currently use.

- \*It would result in secondary negative impacts such as:

  - \*loss of existing curb parking

    - \*loss or loading zones along the west curb

    - \*loss of the designated spaces currently used for school passenger loading which would cause hazardous passenger loading activity at unsuitable locations.

- \*The intersection would still operate at LOS F

Source - EIR 4.13 Pgs. 36-40

<https://link.edgepilot.com/s/adc83150/Lyxlz5ldsEiNIND1JRHZNQ?u=https://www.lovelafayette.org/home/showdocument?id=1553>

In 2017, Lafayette hired TJKM to conduct a Pleasant Hill Corridor Study. On Pages 19 and 20, you can read the section where TJKM again evaluated to see if extending the southbound right-turn storage lane could help mitigate the existing traffic conditions. TJKM said this change would not have any material benefit on southbound movement.

Source - TJKM 2017 Pleasant Hill Road Corridor Study, Pgs. 19-20

<https://link.edgepilot.com/s/2769f9bc/G9HlvBX3g0iKYHVskQ-HLA?u=https://www.lovelafayette.org/home/showdocument?id=3995>

In 2020, TJKM studied the area again and stated that “adding more capacity for southbound through movements at Deer Hill Road does **have the potential to increase speeds upstream and attract more drivers onto the corridor**. Initial simulations using SimTraffic suggest that this would be the case. **As such, the proposed lane may violate both the letter and spirit of the Gateway Constraints Policy.**”

Source TJKM 2020 Terraces of Lafayette Impact Study, Pgs. 90-98

[https://link.edgepilot.com/s/ee695b48/LqA8l47MXUq1bCPk5lhbtw?u=https://lafayette.granicus.com/Viewer.php?view\\_id=19%26clip\\_id=4753%26meta\\_id=111125](https://link.edgepilot.com/s/ee695b48/LqA8l47MXUq1bCPk5lhbtw?u=https://lafayette.granicus.com/Viewer.php?view_id=19%26clip_id=4753%26meta_id=111125)



The Gateway Constraints Policy was implemented to LIMIT the impacts to residents. This amendment to add a "Short-Link Southbound Lane on Pleasant Hill Road as part of the Proposed Terraces of Lafayette Project" will do the opposite and I urge you to reject it.

The Gateway Constraints Policy should not be changed solely based on the Terraces Project as your agenda item states it is. That Project is currently involved in a lawsuit. Furthermore, residents should be given much better notice about meetings involving topics like this. I ask you to consider placing "A" frame boards up with notices at the intersection of Pleasant Hill Road, Deer Hill Road and Stanley Boulevard for any future meeting involving this intersection.

Sincerely,  
Jenifer Paul  
Lafayette, CA

Links contained in this email have been replaced. If you click on a link in the email above, the link will be analyzed for known threats. If a known threat is found, you will not be able to proceed to the destination. If suspicious content is detected, you will see a warning.



## City of Lafayette Draft Staff Report

---

**Date:** May 03, 2021  
**To:** Southwest Area Transportation Committee (SWAT)  
**From:** Mike Moran, Lafayette Director of Engineering and Public Works  
**Subject:** Amendment to Lamorinda Action Plan to Allow Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Approved Terraces of Lafayette Project

---

### Background and Discussion

SWAT members may recall that City of Lafayette staff shared with the Board about a 315-unit proposed development project (Terraces of Lafayette) on February 3, 2020. At that time staff also noted that the project had previously been presented to SWAT in 2013. At the February 2020 meeting it was noted that the project was not yet approved, but that if the development was approved, the City may need to return to SWAT to seek support for an amendment to the Lamorinda Action Plan. The project was approved by the Lafayette Planning Commission in June 2020 and the Lafayette City Council upheld an appeal to the project in a meeting that started August 24, 2020 and concluded August 25, 2020.

The development project consists of 315 multi-family housing units to be built at the southwest corner of the intersection of Pleasant Hill Road and Deer Hill Road. The 315 units will be for-rent apartments 63 of which are below-market-rate units affordable to lower income households, in 14 buildings (seven three-story and seven two-story) with a clubhouse and a leasing office. Because the project will generate an increase to peak hour vehicle trips, the developer proposed adding a short-link southbound lane on Pleasant Hill Road starting north of Deer Hill Road and terminating at the Highway 24 westbound on-ramp (trap lane), to mitigate morning peak flow traffic impacts. However, the addition of a short-link section is not allowed per the Gateway Constraint Policy in the Lamorinda Action Plan so the Action Plan would need to be amended to allow the developer to build the trap lane. Lafayette staff is requesting SWAT support for such an amendment.

The details and history of the Terraces of Lafayette project are explained in more detail in the attached January 11, 2021 Lafayette staff report for the Lamorinda Program Management Committee (LPMC). That same report also outlines the process the City is following, as directed by the Contra Costa Transportation Authority (CCTA) to request an action plan amendment. So far, this item has been presented to the LPMC and the three other Regional Transportation Planning Committees (RTPCs).

LPMC chose to forward the action plan amendment request on to the other RTPCs without comment regarding a recommendation to accept or reject the proposed amendment. It should be noted that the LPMC committee members are also members of SWAT, so they are able to provide their comments along with their SWAT colleagues at this time. Although LPMC members forwarded the item to the RTPCs without comments to the specific proposed mitigation measure, concerns were raised regarding the policy of amending an action plan as part of a single development, as opposed to amending the plan as part of a regular update process.

West Contra Costa Transportation Advisory Committee (WCCTAC) provided a letter to LPMC noting that the proposed mitigation (trap lane) will have a negligible impact on West Contra Costa County and its own Action Plan. The letter also noted that the Board does not have an objection to the City of Lafayette's request for an amendment to the Gateway Constraint Policy within the Lamorinda Action Plan to allow for the implementation of a development mitigation. East County Transportation Planning (TRANSPLAN) also provided a letter supporting the roadway changes being proposed by the City of Lafayette, while also encouraging the new construction to be consistent with complete streets concepts and accommodate autonomous vehicles in the future. Finally, Transportation Partnership and Cooperation (TRANSPAC) submitted a letter to LPMC noting that TRANSPAC does not object to the Lamorinda Action Plan amendment that would allow for construction of the proposed trap lane. The letter also noted that the trap lane in the vicinity of State Route 24 will provide benefits today as well as future opportunities to improve operations in the corridor.

All three of the RTPC letters are attached to this staff report for SWAT review. Although not stated in the letters, members of two of the RTPCs mentioned the proposed trap lane mitigation measure is very similar to a freeway auxiliary lane and that short-segment auxiliary lanes are allowed to be added to freeways without regard to increased capacity. Because the proposed trap lane mimics the excepted auxiliary lane, members were comfortable allowing the trap lane as part of a mitigation measure on Pleasant Hill Road.

Members of the public have provided public comment on this item at the LPMC and RTPC meetings. The two main public comments expressed have been that the City of Lafayette should not be considering this item at this time because the development has a pending lawsuit against it, and that the City should consider a different mitigation measure. In response to the first comment, the City is obliged to continue processing the Terraces of Lafayette development project because currently there is no injunction or other legal mechanism in place for staff to stop proceeding with the project. In response to the second comment, the trap lane is the mitigation measure included with the approved project, staff does not have the authority to modify the mitigation measure post-approval.

#### Next Steps and Proposed Amendment

Lafayette staff is requesting that the SWAT Board support amending the Lamorinda Action Plan and recommend to CCTA to approve the amendment to allow the trap lane to be built. The CCTA Board will be making the final decision on whether to amend the Action Plan. SWAT, and subsequently LPMC, are advisory committees making a recommendation to the CCTA Board.

The Lamorinda Action Plan was most recently updated in September 2017, and the current Lamorinda Action Plan Gateway Constraint Policy specifies:

The two southbound through lanes on Pleasant Hill Road-Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any

through lanes, ***including short-link segments***, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limit line north of the intersection with Taylor Boulevard. - Lamorinda Action Plan (2017) on page 57 (emphasis added).

To allow the development mitigation measure to be built, staff proposes the Gateway Constraint Policy language be amended to read:

The two southbound through lanes on Pleasant Hill Road-Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any through lanes, ***except short-link segments providing access to SR-24***, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limit line north of the intersection with Taylor Boulevard. - Lamorinda Action Plan (2017) on page 57 (emphasis added).

**It should be noted that amendment of the Lamorinda Action Plan and allowance of the trap lane is not required for the approved Terraces of Lafayette Development Project to move forward. The project has been approved either with or without the added lane. If the additional section of roadway is not allowed, then the development would still be built without the traffic mitigation benefit that the lane would provide (Project Variant).**


#### Recommended Action

Forward the proposed Lamorinda Action Plan amendment to the Contra Costa Transportation Agency, with a Southwest Area Transportation Committee recommendation to approve the amendment, thus allowing the approved project mitigation measure (trap lane) to be constructed on Pleasant Hill Road in Lafayette.



#### Attachments:

1. Terraces of Lafayette Site Plan – Annotated
2. RTPC Letters
3. Lafayette Staff Report for LPMC with Attachments and Hyperlinks – January 11, 2021



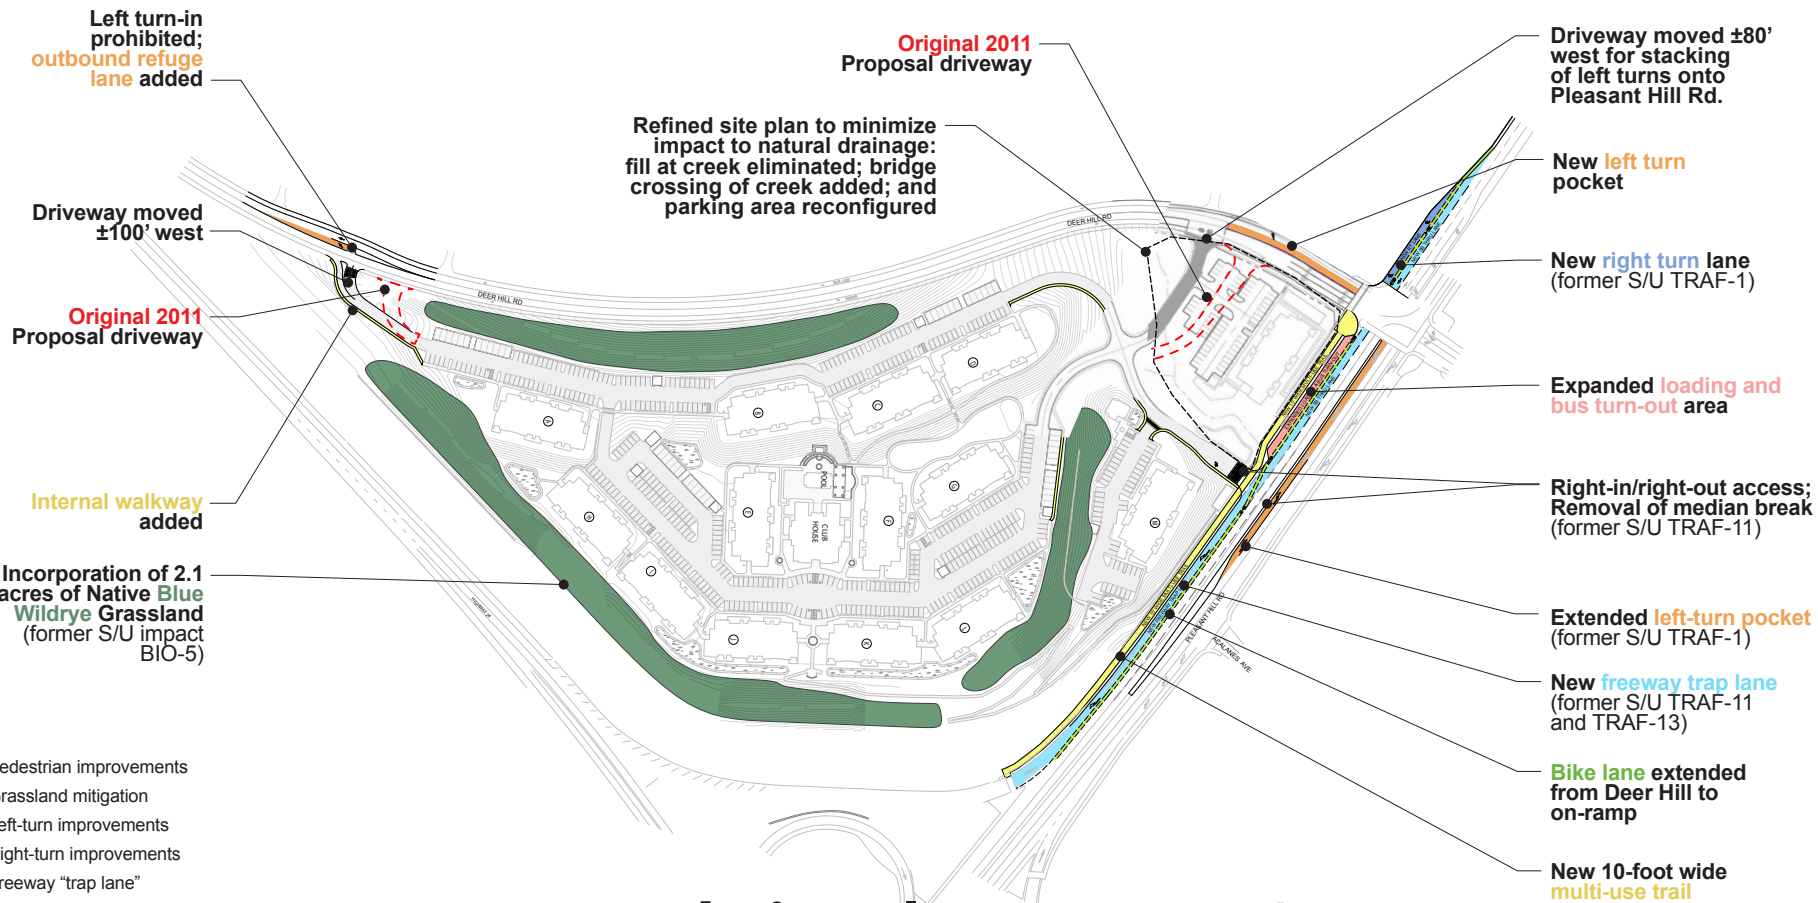

## Annotated Site Plan, June 2019

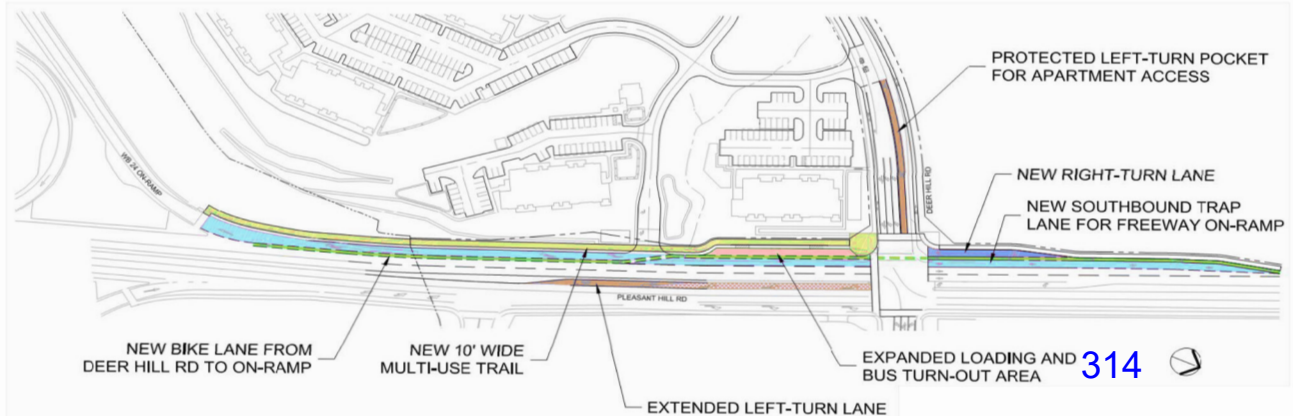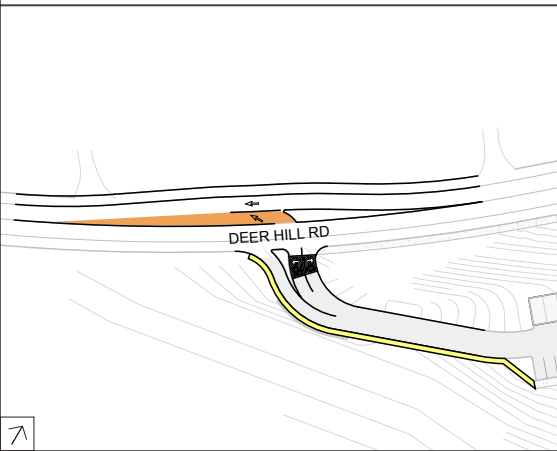

**TRANSPAC**  
**Transportation Partnership and Cooperation**  
Clayton, Concord, Martinez, Pleasant Hill, Walnut Creek and Contra Costa County  
1211 Newell Avenue, Suite 200  
Walnut Creek, CA 94596  
(925) 937-0980

March 11, 2021

Lamorinda Program Management Committee  
c/o Brett Swain, LPMC Administrator  
Town of Moraga  
329 Rheem Boulevard  
Moraga, CA 94556  
via email: [bswain@moraga.ca.us](mailto:bswain@moraga.ca.us)

**RE: Lamorinda Program Management Committee Action Plan Amendment Request**

Dear Mr. Swain:

Thank you for providing TRANSPAC with materials related to the request to amend the Lamorinda Action Plan and the opportunity to review and comment. We understand the amendment request would amend the Gateway Constraint Policy within the Lamorinda Action Plan to allow for an exception to construct a trap lane on Pleasant Hill Road, an additional lane that starts just north of the intersection with Deer Hill Road and continues southbound for about 1,000 feet and that travels into the State Route 24 westbound onramp. The improvement project is proposed to be constructed as mitigation for the recently approved housing project at the southwest corner of Pleasant Hill Road and Deer Hill Road in the City of Lafayette.

We understand the amended language will reflect the following revisions:

*The Gateway Constraint Policy would prohibit the addition of any through lanes, including except short-link segments providing access to SR-24, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limits line north of the intersection with Taylor Boulevard.*

This issue was discussed at the TRANSPAC Board meeting on March 11, 2021. The Board authorized the TRANSPAC Managing Director to notify the Lamorinda Program Management Committee that TRANSPAC does not object to the Lamorinda Action Plan amendment that would allow for the construction of the proposed trap lane project on Pleasant Hill Road and allow for the implementation of a development mitigation. TRANSPAC discussed that Pleasant Hill Road is a common route of regional significance for both TRANSPAC and the Lamorinda Action Plan and the addition of the trap lane in the vicinity of State Route 24 will provide benefits today as well as future opportunities to improve operations in the corridor.

LPMC Action Plan Amendment Request

March 11, 2021

2 of 2

Please contact me if you have any questions or would like to further discuss.

Sincerely,



Matt Todd  
Managing Director

cc: John Hoang, CCTA, via email [jhoang@ccta.net](mailto:jhoang@ccta.net)  
Mike Moran, City of Lafayette, via email [mmoran@ci.lafayette.ca.us](mailto:mmoran@ci.lafayette.ca.us)  
Lisa Bobadilla, SWAT, via email [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov)

Attachment: LPMC letter Requesting Comment from RTPCs Regarding Amending the  
Lamorinda Action Plan (dated 2/1/21)



# Lamorinda Program Management Committee

---

February 1, 2021

John Nemeth  
WCCTAC  
6333 Potrero Avenue, Suite 100  
El Cerritos, CA 94530  
Via email: [jnemeth@wcctac.org](mailto:jnemeth@wcctac.org)

Mathew Todd, P.E.  
TRANSPAC  
1211 Newell Avenue, Suite 200  
Walnut Creek, CA 94596  
Via email: [Matt@GrwayBowenScott.com](mailto:Matt@GrwayBowenScott.com)

John Cunningham  
TRANSPLAN  
30 Muir Road  
Martinez, CA 94553  
Via email: [john.cunningham@ded.cccounty.us](mailto:john.cunningham@ded.cccounty.us)

Subject: Consideration of Amending the Lamorinda Action Plan to Allow for the Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette Project

Dear RTPC Administrators,

At its January 11, 2021 meeting, the Lamorinda Program Management Committee (LPMC), considered and discussed a proposed amendment to one of the gateway constraints in the Lamorinda Action Plan (LAP) that pertains to Pleasant Hill Road, a Route of Regional Significance. Currently, the LAP states: "The Gateway Constraint Policy would prohibit the addition of any through lanes, including short-link segments, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limits line north of the intersection with Taylor Boulevard." The proposed amendment would remove the prohibition against short-link segments and would allow for the construction of a southbound short-link travel lane on Pleasant Hill Road starting just north of Deer Hill Road and terminating at the State Route 24 westbound on-ramp (trap lane). The request for this amendment arises from the City of Lafayette's recent approval of the Terraces project -- a 315-unit multi-family housing project to be built at the southwest corner of Pleasant Hill Road and Deer Hill Road. The trap lane on Pleasant Hill Road

## Lamorinda Program Management Committee

was submitted as part of a developer application to mitigate a.m. peak traffic generated from the Terraces project.

During its consideration of the proposed amendment, the LPMC noted the following:

- The LPMC is an advisory committee to SWAT, which is in turn an advisory committee to CCTA. The decision whether to amend the LAP to allow for the construction of the proposed trap lane rests exclusively and solely with CCTA. Neither LPMC nor SWAT has any decision-making authority.
- The Terraces development will proceed regardless of whether an amendment to the LAP that allows for the trap lane is or is not approved.
- There are pros and cons to the construction of the trap lane. Specifically, the LPMC reviewed a slide in the staff presentation that listed the following pros and cons:

Reasons against the trap lane:

- Added capacity will attract more traffic
- Roadway will be even larger
- Pedestrian crossing times will increase across a longer distance

Reasons for the trap lane:

- Delay for local traffic can be reduced while still metering regional traffic with signal coordination
- Evacuation times will be decreased during an emergency
- Provides an extra lane width under the City's control to utilize for future use
- The proposed amendment to the LAP raises an important policy question – namely, whether it is appropriate to amend an action plan such as the LAP specifically in response to a particular development project or whether any amendment should be done as part of a larger amendment or update to the action plan.

After receiving public comment, asking questions of staff, and deliberating, the LPMC instructed staff as follows:

- That the LPMC takes no position and expresses no view on whether or not the amendment to the LAP should or should not be made.
- That proposed amendment to the LAP be shared with SWAT and the other regional transportation planning committees (RTPC) that serve as advisory bodies to CCTA for their review and comment, if any.
- That the pros and cons of the proposed trap lane that were presented to LPMC also be shared with SWAT and the other RTPCs.

Enclosed for further background are the materials that were provided to the LPMC and made available to the public in advance of the January 11, 2021 meeting.




## Lamorinda Program Management Committee

---

The LPMC Administrator duties are rotated among the three Lamorinda agencies annually and we are in the process of transitioning from the City of Orinda to the Town of Moraga. Please provide your RTPC comments to Bret Swain, Senior Engineer of the Town of Moraga, at [bswain@moraga.ca.us](mailto:bswain@moraga.ca.us) Thank you.

Sincerely,



Jason Chen, LPMC Administrator

Enclosures: LPMC January 11, 2021 Agenda Package  
Public Communication Received as of 01-11-2021 8 a.m.

cc: Bret Swain, Moraga via email [bswain@moraga.ca.us](mailto:bswain@moraga.ca.us)  
Shawn Knapp, Moraga via email [sknapp@moraga.ca.us](mailto:sknapp@moraga.ca.us)  
Mike Moran, Lafayette via email [MMoran@ci.lafayette.ca.us](mailto:MMoran@ci.lafayette.ca.us)  
Lisa Bobadilla, SWAT via email [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov)  
John Hoang, CCTA via email [jhoang@ccta.net](mailto:jhoang@ccta.net)  
Matt Kelly, CCTA via email [mkelly@ccta.net](mailto:mkelly@ccta.net)

# TRANSPLAN COMMITTEE

## EAST COUNTY TRANSPORTATION PLANNING

Antioch • Brentwood • Oakley • Pittsburg • Contra Costa County  
30 Muir Road, Martinez, CA 94553

---

March 11, 2021

Bret Swain  
LPMC Administrator  
Senior Engineer  
335 Rheem Blvd  
Moraga, CA 94556

**RE: February 1, 2021 Letter to TRANSPLAN: *Consideration of Amending the Lamorinda Action Plan to Allow for the Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette Project***

Dear Mr. Swain:

Thank you for circulating the proposed Lamorinda Action Plan amendment to TRANSPLAN. The Committee respects the autonomy of Lamorinda jurisdictions on gateway constraint matters and has no comment on that policy issue.

The TRANSPLAN Technical Advisory Committee reviewed the issue and expressed support for the roadway changes being proposed by the City of Lafayette. The TRANSPLAN Committee also encourages the City of Lafayette to improve the roadway such that it is consistent with complete streets concepts (bicycle/pedestrian facilities), includes safety improvements, and can accommodate infrastructure to better accommodate autonomous vehicles in the future.

Thank you for the opportunity to review and comment on this matter. If you have any questions, please contact John Cunningham, TRANSPLAN staff at [john.cunningham@dcd.cccounty.us](mailto:john.cunningham@dcd.cccounty.us) or (925) 674-7833.

Sincerely,



Aaron Meadows  
Chair, TRANSPLAN  
Councilmember, City of Oakley

cc: TRANSPLAN TAC  
Mike Moran, City of Lafayette

March 26, 2021

Lamorinda Program Management Committee  
c/o Jason Chen  
Orinda City Hall  
22 Orinda Way  
Orinda, CA 94563

**Subject:** City of Lafayette's Requested Amendment to the Gateway Constraint Policy and Lamorinda Action Plan

Lamorinda Program Management Committee (LPMC):

I am writing this letter as a follow-up to our letter sent on February 15, 2021. As mentioned previously, this issue was discussed at the WCCTAC Technical Advisory Committee (TAC) meeting on February 11, 2021. The TAC voted unanimously to request that the WCCTAC Executive Director send a letter to the LPMC stating WCCTAC's position.

Subsequently, the CCTA requested that WCCTAC's Board take a position on this issue as well. As such, staff brought this issue to the WCCTAC Board's March 26, 2021 meeting.

The Board concurred with the TAC that the proposed mitigation will have a negligible impact on West Contra Costa County and its own Action Plan. Like the TAC, the Board does not have an objection to the City of Lafayette's request for an amendment to the Gateway Constraint Policy within the Lamorinda Action Plan to allow for the implementation of a development mitigation.

Please let me know if you have any follow-up questions.

Sincerely,



John Nemeth  
WCCTAC Executive Director

cc: John Hoang, CCTA; Mike Moran, City of Lafayette





## City of Lafayette Staff Report

---

**Date:** January 11, 2021  
**To:** Lamorinda Program Management Committee  
**From:** Mike Moran, Lafayette Director of Engineering and Public Works, and Greg Wolff, Lafayette Planning Director  
**Subject:** Addition of a Short-Link Southbound Lane on Pleasant Hill Road (Trap Lane) as Part of the Proposed Terraces of Lafayette Project

---

### **EXECUTIVE SUMMARY**

If a project generates more than 50 net peak hour vehicle trips, the Lead Agency shall notify the other Lamorinda jurisdictions and the designated staff liaisons for the Lamorinda Program Management Committee (LPMC), so that affected jurisdictions may comment on proposed projects and subsequent environmental documentation. In 2013, Lafayette City staff notified and presented the Terraces of Lafayette project to LPMC. Since it had been several years since that presentation, Lafayette staff orally presented the findings of the updated traffic data and addendum to the original Final Environmental Impact Report (EIR) at LPMC's February 3, 2020, meeting. At that meeting, staff explained that part of the developer's proposed project design was to install a short-link southbound lane on Pleasant Hill Road starting north of Deer Hill Road and terminating at the Highway 24 westbound on-ramp (trap lane), in order to reduce traffic impacts. Staff also explained that adding the lane potentially violates the Gateway Constraint Policy of the Lamorinda Action Plan. Since adding the lane fully reduces the new development traffic in the a.m. peak hour to a less than significant level under the California Environmental Quality Act (CEQA), per a transportation model, and building the development without the lane would violate one of the Multimodal Transportation Service Objectives (MTSOs), staff is asking for an amendment to the Lamorinda Action Plan's Gateway Constraint Policy to allow installation of the trap lane.

**It should be noted that amendment of the Lamorinda Action Plan and allowance of the trap lane is not required in order for development of the approved Terraces of Lafayette Development Project to move forward. The project has been approved either with or without the added lane. If the additional section of roadway is not allowed, then the development would still be built without the traffic mitigation benefit that the lane would provide (Project Variant).**

LPMC has conferred with the Contra Costa Transportation Authority (CCTA) regarding the requested amendment to the Lamorinda Action Plan and has been advised to follow the process in the Growth Management Plan, the same procedures that have been followed for previous plan

updates. A flowchart outlining those procedures has been provided by CCTA and is attached to this report. Per that flowchart, it should be noted the proposed amendment will be escalated to the Southwest Area Transportation Committee (SWAT) regardless of the input from LPMC or the input from the other regional transportation planning committees (RTPCs). The CCTA Board will be making the final decision on whether to amend the Action Plan. LPMC and SWAT are advisory committees making a recommendation to the CCTA Board.

## **RECOMMENDED ACTION**

- 1) LPMC review, provide comments, and distribute the recommended language for amending the Lamorinda Action Plan to all of the regional transportation planning committees (RTPCs) within Contra Costa County for comment. The recommended amendment language is specifically written in Recommended Action 2 below.
- 2) LPMC review, provide comments, and forward the proposed amendment to the Southwest Area Transportation Committee (SWAT) for their review of the request to amend the Lamorinda Action Plan Gateway Constraint Policy for Pleasant Hill Road (page 57, 3<sup>rd</sup> paragraph, of the Lamorinda Action Plan, 2017) to read:

“The two southbound through lanes on Pleasant Hill Road-Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any through lanes, except short-link segments providing access to SR-24.”

The other details of the gateway constraint policy shall remain unchanged.

- 3) LPMC review, provide comments, and forward the proposed request that SWAT review the request to allow construction of the proposed southbound trap lane.

## **BACKGROUND**

In March 2011, O'Brien Land Company, LLC (Applicant) submitted an application to the City of Lafayette (City) for a multi-family residential project known as the Terraces of Lafayette (the Project). As proposed, the Project consisted of 315 moderate-income apartments in 14 separate buildings (7 three-story; 7 two-story) on a 22.27-acre parcel at the southwest corner of Pleasant Hill Road and Deer Hill Road. The Lafayette City Council certified a Final EIR for the Project in 2013. Later in 2013, the Applicant entered into a Project Alternative Process Agreement with the City which suspended the processing of the 315-unit Terraces Project, pending the review of the lower-density, single-family residential proposal known as the Homes at Deer Hill. This Project Alternative proposed 44 single-family detached residences on the 22.27-acre site, resulting in an average density of two dwellings per acre, and was considered by staff to be more in keeping with Lafayette's semi-rural character.

Following a rezoning that approved the Project Alternative, a citizens group named “Save Lafayette” subsequently filed a referendum seeking to invalidate the Homes at Deer Hill approval and sued the City in 2016. Following the lawsuit and its appeal, the City Council placed Measure L on the June 5, 2018, ballot. Measure L asked residents to vote either “yes” (approve) or “no” (deny) on the Project Alternative. Measure L failed and the approval of the Project Alternative was invalidated. On June 15, 2018, ten days after the June 5 ballot, the Applicant submitted a letter

requesting that the City resume processing the original 315-unit Terraces of Lafayette Project. An addendum to the Final EIR was prepared, and its conclusions relevant to the requested action by the LPMC are outlined in the discussion section below.

Lafayette's City Council determined that the Addendum was adequate under CEQA, made CEQA findings, adopted a statement of overriding considerations, adopted a mitigation monitoring and reporting program (MMRP) for the Project and approved the Project at an appeal hearing that began on August 24, 2020, and concluded on August 25, 2020. In doing so, the City Council upheld the Planning Commission's earlier decision to approve the Project on June 30, 2020.

The LPMC Technical Advisory Committee (TAC), in preparation for this public meeting, reviewed and recommended forwarding this Lamorinda Action Plan amendment item for LPMC to discuss and evaluate.

## **DISCUSSION**

The following is a brief summary of the main transportation impacts/issues of the Addendum and supporting 2020 TJKM Traffic Study that pertain to LPMC:

Pleasant Hill Road & Deer Hill Road/Stanley Boulevard: The Addendum determined that the Proposed Project would not have a significant impact at this intersection under Existing Plus Project conditions, in part because it would include an additional southbound through lane on Pleasant Hill Road that would start just north of Deer Hill Rd and become a trap lane for vehicles entering the on-ramp for WB SR-24. However, the additional lane would conflict with the Lamorinda Action Plan's Gateway Constraint Policy, as discussed further below, and this would be considered a significant impact. The Addendum concluded that the Project Variant (without the additional lane) would result in a significant and unavoidable level of service (LOS) impact at this intersection in the a.m. peak hour under Cumulative (2040) Plus Project conditions.

A key policy of the Lamorinda Action Plan is the Gateway Constraint Policy that controls peak-hour and peak-direction vehicle flows on major roadways leading into the Lamorinda area. The Gateway Constraint Policy is part of the Lamorinda Action Plan's recommended package of goals, goals, policies, objectives, and actions for addressing regional transportation issues within the Lamorinda area, and is not a mitigation measure for environmental impacts under CEQA. The Action Plan includes three gateway constraints: 1) **Pleasant Hill Road**, 2) Camino Pablo-San Pablo Dam Road, and 3) SR 24. Pleasant Hill Road is designated as a "Secondary Route of Regional Significance" that consists of two lanes in each direction from its merge with Taylor Boulevard south to SR 24, with additional turn lanes at most intersections. It is important to note that, to date, Lafayette has allowed the existing physical capacity of Pleasant Hill Road and traffic signal timing to act as the gateway constraints. The Lamorinda Action Plan was most recently updated in September 2017, and the current Lamorinda Action Plan Gateway Constraint Policy specifies:

The two southbound through lanes on Pleasant Hill Road-Taylor Boulevard are proposed as a gateway constraint. The Gateway Constraint Policy would prohibit the addition of any through lanes, *including short-link segments*, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limit line north of the intersection with Taylor Boulevard. - Lamorinda Action Plan (2017) on page 57 (emphasis added).

The 2013 Final EIR for the Terraces Project identified the addition of a new short-link southbound lane to Pleasant Hill Road along the Project frontage, which had been proposed by the Applicant, as a potential mitigation measure that would reduce an LOS impact identified in the a.m. peak hour without the additional lane to a less than significant level. However, the 2013 Final EIR concluded that the additional southbound lane would conflict with the Gateway Constraint Policy, as specified in the 2009 Lamorinda Action Plan, which called for the investigation of "appropriate mechanisms, including maintaining existing roadway lanes and widths and restrictive signal timing, to discourage use of Pleasant Hill Road as a substitute for freeway travel." The 2013 Final EIR determined that this conflict with the Gateway Constraint Policy would result in the potential mitigation measure having a significant secondary impact.

As described above, and similar to the potential mitigation measure considered in the 2013 Final EIR, when processing of the Project resumed in 2018, the applicant proposed the addition of a new southbound lane on Pleasant Hill Road beginning just north of the Project site's frontage and proceeding southward to become a "trap" lane for the westbound SR 24 freeway on-ramp. The Addendum concluded that the addition of the trap lane would improve traffic conditions on southbound Pleasant Hill Road, and would result in a less-than-significant impact related to LOS at the Deer Hill Road/Stanley Boulevard intersection, unlike the Project Variant, under which this impact would be significant and unavoidable in the a.m. peak hour under Cumulative (2040) Plus Project Variant conditions.

The Addendum also concluded that under Cumulative (2040) Plus Project conditions, the delay index impact in the northbound direction on Pleasant Hill Road in the p.m. peak hour would be significant and unavoidable either with or without the additional southbound "trap" lane. The Addendum concluded that the delay index impact southbound on Pleasant Hill in the a.m. peak hour would be less than significant under the Project with the additional lane, but would be significant and unavoidable under the Project Variant without the additional lane under Cumulative (2040) Plus Project Variant conditions.

The LPMC cannot make a final decision with respect to the Gateway Constraint Policy, but rather will be making a recommendation to CCTA, which will be acting as a responsible agency under CEQA. As a responsible agency, the CCTA can rely upon the Final EIR and Addendum certified by and adopted by the City of Lafayette, as lead agency, for purposes of compliance with the environmental review requirements of CEQA if it approves the proposed amendment to the Gateway Constraint Policy. As explained above, the Final EIR and Addendum analyzed the transportation and circulation impacts, and other environmental impacts, including growth-inducing impacts, that potentially could occur under the proposed Project with the additional lane, as well as the Project Variant without the additional lane, and therefore analyzed the potential impacts of a decision by CCTA to approve the proposed Gateway Constraint Policy amendment. Further, notwithstanding the pendency of litigation by a party other than CCTA challenging the Project's Final EIR and Addendum, those documents must be assumed by the CCTA, as a responsible agency, to comply with CEQA. (Public Resources Code Section 21167.3; 14 Cal Code Regs. Section 15233).

## **NEXT STEPS**

The LPMC and SWAT have already provided comments before the EIR was finalized in 2013, and both were updated in February of 2020 that the Project was working its way through Lafayette's approval process and could return for action to amend the Lamorinda Action Plan if the Project was approved.

Now that the Project has been approved by Lafayette's City Council, the City recognizes one of the vehicle traffic impacts violates the CCTA's MTSOs. This will be true under Cumulative (2040) Plus Project conditions for the northbound Pleasant Hill Road traffic in the p.m. peak travel times (either with or without the southbound trap lane), and for southbound Pleasant Hill Road traffic in the a.m. peak travel times (only if the southbound trap lane is not built). However, the Lamorinda Action Plan states:

*Under adopted CCTA policy, exceedance of an MTSO does not constitute a compliance issue with the Growth Management Program. There is no consequence to local jurisdictions if an MTSO is exceeded over time and not the result of a single project. - Lamorinda Action Plan (Sept. 2017) on page 69*

Since the exceedance of an MTSO is a combination of the impacts of regional growth and the Project, the language in the above excerpt suggests there will not be consequences associated with the action from CCTA. However, peak time delay will likely increase at this already congested location that connects two schools and a freeway on-ramp/off-ramp.

Building the additional lane would conflict with the Gateway Constraint Policy by increasing vehicle capacity along the Pleasant Hill Road corridor, albeit for a brief portion of the roadway. The Addendum identified Mitigation Measure TRAF-22, which must be implemented pursuant to the MMRP, and which requires that the applicant either (a) obtain approval of amendments to the Lamorinda Action Plan such that there is no longer a conflict, obtain approval of an exception to the Gateway Constraint Policy for the Project's proposed additional southbound through lane, or obtain a determination that the proposed additional through lane does not conflict with the Gateway Constraint Policy, by LPMC, SWAT, and the CCTA Board, or (b) proceed with the Project Variant, which would not include the additional southbound through lane. Unlike a General Plan policy conflict, the City does not solely control the ability to amend the Gateway Constraint Policy. Amendment of the Policy, or obtaining an exception or a determination as described above, requires the City and the applicant to work with the other jurisdictions that comprise the LPMC, RTPCs, and CCTA.

The main goal of the Gateway Constraint Policy is to dis-incentivize vehicles from using local roads and to keep them on the freeway system. If the trap lane is built, it will slightly improve flow for southbound Pleasant Hill Road during peak travel times. As a possible strategy to control traffic flow, the City can adjust the signal timing on Pleasant Hill Road at Rancho View Dr. and the subsequent four signals before WB SR-24 to keep it at current travel times. This scenario allows traffic to be constrained at the entrance and throughout the Pleasant Hill Road corridor even though a short-segment trap lane would be added at the exit of the corridor.

Staff recommends LPMC forward to SWAT the proposed amendment to the Lamorinda Action Plan, which would allow the trap lane to be built, because the installation of the trap lane:

1. Will mitigate the impacts of traffic from the approved Terraces Project for southbound Pleasant Hill Road during a.m. peak travel times.
2. May help reduce oversaturated traffic conditions at the intersection of Pleasant Hill Road at Deer Hill Road/Stanley Boulevard while still constraining or metering traffic entering the City from the north with signal timing.
3. Will provide additional capacity to evacuate residents throughout the Pleasant Hill Road corridor in the event of an emergency.

While the developer proposed adding the southbound trap lane to mitigate additional traffic from the Project, staff believes that the additional capacity for evacuating the corridor via southbound Pleasant Hill Road toward SR 24 may be the most compelling reason to allow the trap lane to be built. During public hearings, both the Planning Commissioners and City Council members heard numerous public commenters express concern with evacuation procedures and limited road capacity should the Pleasant Hill Road corridor area need to be evacuated during a fire or any other emergency. Although many commenters were expressing this concern as a reason to deny the Terraces Project, a supplemental analysis prepared by TJKM at the request of some of the Planning Commissioners demonstrated that the new through lane would reduce evacuation times to SR 24.

## **ATTACHMENTS**

1. CCTA Growth Management Program (GMP) Action Plan Update Process Flowchart
2. Terraces of Lafayette Site Plan – Annotated
3. [Lamorinda Action Plan](#)
4. [Traffic Impact Study Report – Terraces of Lafayette](#)
5. [Addendum to the Terraces of Lafayette Environmental Impact Report \(May 2020\)](#)  
Including:
  - [Appendix A – On-site Structures Survey & Demolition Permit](#)
  - [Appendix B – Biological Resources](#)
  - [Appendix C – Air Quality & Greenhouse Gas Technical Assessment](#)
  - Appendix D – Traffic Impact Study (*see Item 4, above*)
  - [Appendix E – Geotechnical Study](#)
  - [Appendix F – Noise Collection Data & Analysis](#)
6. [Revisions to the Addendum to the Terraces of Lafayette Environmental Impact Report \(June 22, 2020\)](#)
7. [Terraces of Lafayette Mitigation Monitoring and Reporting Program](#)
8. [TJKM Memorandum on TIS Data Sets and Evacuation Modeling \(June 22, 2020\)](#)



**From:** [Kristen Altbaum](#)  
**To:** [Jason Chen](#); [Bobadilla, Lisa](#); [thaile@ccta.net](mailto:thaile@ccta.net)  
**Cc:** [Joanne Robbins](#)  
**Subject:** Public comment on Gateway changes  
**Date:** Monday, April 5, 2021 4:11:01 PM  
**Attachments:** [Elite Traffic Report.pdf](#)  
[ATT00001.htm](#)  
[Acalanes Superintendent letter.pdf](#)  
[ATT00002.htm](#)  
[Acalanes Principal letter.pdf](#)  
[ATT00003.htm](#)  
[Ltr\\_fm Con Fire re RVR problems.pdf](#)  
[ATT00004.htm](#)

---

Jason, Lisa, please forward to all SWAT members, Joanne- Council, thanks.

Dear SWAT, Tim Haile CCTA,

I spoke at the April 5, 2021 SWAT meeting recommending language for the Lamorinda Action Plan's Gateway Policy for PH Rd. My recommendation for wording changes on page 57 of the LAP would be:

**The Gateway Constraint Policy would prohibit the addition of any through lanes, including short-link segments, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limits line north of the intersection with Taylor Boulevard, with the exception of the following:**

- 1) Any lane that accommodates bus and carpool only during peak travel**
- 2) Any protected bike / E-bike lane**
- 3) Any safe pedestrian over or under crossings**

Adoption of this specific language in the LAP would be consistent with Vision Zero goals and growth management goals for the PH Rd corridor. This language would improve efficiency and safety for PH Rd, particularly students attending Acalanes High School, and dissuade solo vehicles from using PH Rd as a short cut from Hwy 680 via WAZE or Google Map apps.

Per Jason Chen's letter dated February 1, 2021 and addressed to RTPC Administrators, it appears members of LPMC and SWAT are well aware that "reasons against the proposed trap lane are 1) Added capacity will attract ore traffic, 2) Roadway will be even larger, 3) Pedestrian crossing times will increase across a larger distance, .....and 4) whether it is appropriate to amend an action plan such as the LAP specifically in response to a particular development project or whether any amendment should be done as part of a larger amendment or update to the action plan."

By adopting my recommended language above *during a larger amendment or update*, all of these known NEGATIVE impacts (per Jason Chen's letter) can be avoided.

Northeast Lafayette residents have been very vocal about needing tragic mitigation measures for a very long time. According to Elite Transportation Group's Evacuation Model, Con Fire, and Acalanes Superintendent and Principal, traffic and safety are a major concerns for PH Rd. **Any changes to the Lamorinda Action Plan should be to try and mitigate these heavily expressed and valid concerns. Tax payers are depending on SWAT/CCTA to make**

**efficiency and safety their highest priority.**



# Memorandum

Date: 3/5/2020

To: Michael Griffiths

From: Lin Zhang, PhD, PE, TE, PTOE  
Elite Transportation Group, Inc. (ETG)

Subject: **Peer Review of Updated Traffic Study for the Proposed Terraces of Lafayette Project**

## EXECUTIVE SUMMARY

This memorandum provides a summary of a peer review of the updated traffic impact study prepared by TJKM (hereinafter referred to as **updated traffic study**) for the proposed Terraces of Lafayette Project (hereinafter referred to as **proposed project**). The following areas are identified by Elite Transportation Group, Inc. (ETG) either unmitigable or inadequate:

- It was not clear whether the traffic analysis models used for the queueing and weaving analyses were calibrated to the local traffic condition. The conclusions drawn upon the model results would be questionable if the models were not properly calibrated.
- The proposed project would result in a significant and unavoidable impacts on the level of service at Pleasant Hill Road/Deer Hill Road intersection, as well as delay on Pleasant Hill Road.
- The projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road and SR 24.
- Crossing three lanes for vehicles existing westbound SR 24 off-ramp to access the extended northbound left-turn lane at the intersection of Pleasant Hill Road/Deer Hill Road in this heavily congested short segment (approximately 600 feet only) will not only cause additional delay, but also pose safety risks. However, these impacts were not fully studied or mitigated.
- For a congested and gridlocked arterial such as Pleasant Hill Road during peak hours, installing Emergency vehicle preemption (EVP) would not fully mitigate the impact of the proposed project on emergency response time.
- The net loss of 15 parking spaces on Pleasant Hill Road would result in a significant impact on passenger loading.
- The proposed bicycle lane between Deer Hill Road and SR 24 on-ramp would create major conflict zones between bicycles and passenger-loading vehicles, between bicycles and vehicles in the trap lane, and between bicycles and vehicles entering & existing the property driveway.
- Analysis of impacts to traffic, noise, and pollution was not performed for the massive amount of heavy trucks in the grading stage of construction (approximately 45 heavy truck trips per hour).
- The updated traffic study lacks an analysis to quantify the traffic impact of the proposed project during wildfires and PG&E's power shut-offs. Also, an evacuation plan for the residents inside the Very High Fire Hazard Severity Zones (VHFHSZ) needs to be developed or updated.
- The updated traffic study omitted the analysis of the significant impact of the proposed project on westbound queues at the intersection of Laurel Drive/Deer Hill Road in the AM peak period under the Plus Project scenarios.

## FIELD VISIT

To gain local knowledge of the study area, ETG conducted a field visit along Pleasant Hill Road between Withers Avenue and Old Tunnel Road, and Deer Hill Road between First Street and Pleasant Hill Road on October 22, 2019 (Tuesday), during AM peak, School peak, and PM peak periods.

On Pleasant Hill Road, our observations indicated that it experienced the most congestion in the southbound direction during the AM peak period. The southbound queue in the AM peak period extended as far as 1,500 feet north of Rancho View Drive. In the PM peak period, the northbound Pleasant Hill Road experienced congestion near the intersection at Pleasant Hill Road and Stanley Blvd/Deer Hill Rd, with the longest queue extending about 2,000 feet south of this intersection.

On Deer Hill Road, it was observed that there was an excessive left-turn queue on the westbound approach at the intersection of Deer Hill Road and Laurel Drive in the AM peak period. During the PM peak period, the eastbound Deer Hill Road experienced severe congestion with the longest queue extending more than one mile from the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard.

ETG also conducted several travel time runs during the field visit. **Table 1** lists the average travel times and the delay indices in each peak direction of Pleasant Hill Road between Withers Avenue and Old Tunnel Road (approximately 2.8 miles). Note that the delay indices were calculated using the estimated free-flow travel time from Google Maps. Each average travel time was based on several travel time runs. **Table 1** also lists the Contra Costa Transportation Authority (CCTA) 2017 Multimodal Traffic Service Objectives (MTSO) delay indices, as well as the 2019 projected delay indices calculated by TJKM. The delay indices will be discussed in more detail in the next section.

**Table 1. Travel Time and Delay Index - Pleasant Hill Road**

Direction	Period	Average Travel Time (min)	Free-Flow Travel Time (min)	Delay Index	2017 MTSO Delay Index	2019 Projected (TJKM)
SB	AM Peak	16.4	5.5	2.98	2.4	1.34
NB	School Peak	7.4	5.5	1.35	-	-
NB	PM Peak	11.4	5.5	2.07	2.0	1.74

## PEER REVIEW FINDINGS

### Latest Traffic Data

The updated traffic study collected the turning movement counts at all 17 study intersections on April 30, 2019, and one intersection only at Pleasant Hill Road/Deer Hill Road/Stanley Boulevard on May 2, 2019. The counts at all study intersections were later scaled up based on the day-to-day traffic variation at the Pleasant Hill Road/Deer Hill Road/Stanley Boulevard intersection between April 30 and May 2, 2019, for the analysis.

The typical practice of collecting turning movement counts at an intersection is to collect counts on two midweek days and use the average for analysis. It is not certain that it was a budget constraint that did not allow the new data collection to cover two days at all study intersections. However, scaling up counts to a higher level would result in a more conservative analysis.

For the signal timing data, the updated study used the latest timings at intersections on Pleasant Hill Road provided by the City of Lafayette. However, for other signalized study intersections not on Pleasant Hill Road, default parameters were assumed, instead of using the actual signal timings, for unstated reasons.

### **Study Area Coverage**

The study area in the updated study remains the same as the 2012 study. Based on our field visit observations, this study area is sufficient for the traffic impact analysis of the proposed Terraces of Lafayette project.

### **Analysis Methodologies**

ETG evaluated the methodologies used in the updated traffic study, including the following:

- **Traffic Forecast** – The updated study used the latest CCTA Traffic Forecasting Model base year (2018) and future year (2040) outputs to calculate the annual average growth rate. This growth rate was later applied to the adjusted 2019 counts to estimate 2040 traffic. This is a reasonable and common practice.
- **Level of Service (LOS) Analysis** – The updated study used the Highway Capacity Manual (HCM) 2010 methodologies to determine LOS for the study intersections. This is different from the 2012 study that used the HCM 2000 methodologies, but is compliant with CCTA's preference as listed in the CCTA Technical Procedures.
- **Signal Warrant** – The updated study conducted peak hour signal warrant analyses for unsignalized intersections using the 2014 California Manual on Uniform Traffic Control Devices (MUTCD), which is the latest version of the manual. This is a reasonable and common practice.
- **Queuing Analysis** – Similar to the 2012 study, the updated study used the simulation approach to conduct queuing analysis. The simulated 95<sup>th</sup> percentile queue lengths were used to determine whether the existing turn-lanes provide sufficient storage. However, it was not mentioned in the report whether the simulation model was calibrated to the local traffic condition. Model calibration is the process of adjusting model parameters (which initially are defaults) to obtain a model that replicates the existing traffic conditions. Model calibration is critical in that it ensures that a traffic simulation model is able to reproduce the local traffic condition and is proper to use for analyzing alternatives or scenarios. For a corridor study, travel time is the most common performance measure that is used in model calibration. It was not clear from the updated study report if the traffic analysis models were calibrated. If the traffic analysis models were not calibrated, then the models would be unreliable and the conclusions drawn from the analysis would be questionable. TJKM should explain the calibration methods used.
- **Weaving Analysis** – It was concerned that the proposed project would worsen the weaving condition on Pleasant Hill Road between freeway ramps and nearby intersections. The updated study employed a similar simulation approach as used in the 2012 study to evaluate the impact

of the proposed project on weaving activities. However, it was not mentioned in the report whether the simulation model was calibrated to the local traffic condition.

- **Delay Index** – The Delay Index (DI) is an expression of the amount of time required to travel between two points during the peak hour as compared to the free-flow travel time baseline. The delay index is defined as:  $Delay\ Index = \frac{Congested\ Peak-Hour\ Travel\ Time}{Free-Flow\ Travel\ Time}$ . The updated traffic study estimated the 2019 delay indices for Pleasant Hill Road and SR 24 by using the 2013 MTSO monitoring results and growth rates between 2013 and 2019. It was stated in the report that the 2017 MTSO monitoring results for Pleasant Hill Road and SR 24 overestimated the existing delay index, therefore, the 2013 results were used to estimate the 2019 delay index. However, the 2017 MTSO monitoring results were based on INRIX data. INRIX gathers and aggregates data collected from a wide range of anonymous GPS-equipped devices (e.g., smartphones), and thus provides much better coverage of travel time data compared to traditional travel time tach runs (i.e., floating car survey). INRIX data has been validated and recognized as a reliable data source, and has been used by many agencies and organizations nationwide and locally in the Bay Area for congestion monitoring and other traffic-related projects. In addition, our travel time runs on Pleasant Hill Road conducted on October 22, 2019, show that the existing delay indices are higher but close to the 2017 monitoring results (**Table 1**). Therefore, our assessment is that the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road. See below under the heading Impacts on SR 24 for our similar comments on the impacts on Highway 24.

### Trip Generation Calculations

The 2012 study calculated trip generations using the ITE Trip Generation Manual, 8<sup>th</sup> Edition. Since the 10<sup>th</sup> edition of the Manual was published in 2017, the updated traffic study calculated trip generation based on the latest Manual (i.e., 10<sup>th</sup> edition). However, because the new trip generation resulted in fewer trips than the original one in the 2012 study, the updated traffic study used the original trip generation for the analysis. As stated in the report, the proposed project was classified as “Multifamily Housing (Mid-Rise)” according to the latest Manual but was classified as “Apartments” based on the older version of the Manual. The change of land use classification would result in over a 25% reduction in trip generation, although it is unclear how such a change is warranted since we understand that half the buildings are 2-story and half are 3-story. The updated study report included the 10<sup>th</sup> Edition-based trip generation for comparison purposes only, but applied the higher trip generation used in the 2012 study.

We verified and confirmed that the trip generation calculations using both the 8<sup>th</sup> and 10<sup>th</sup> Edition of the Traffic Generation Manual in the updated traffic study report are valid.

### Trip Distribution Assumptions

The updated study retained the trip distribution that was manually estimated in the 2012 study, because “it was determined that the ‘plus project’ model results could not be relied upon”. It was not certain if it was caused by the model not being sensitive to the proposed project.

We reviewed the assumed trip distribution and they are reasonable given the traffic conditions in the study area.



## Assumptions for Future Year Cumulative Scenarios

The future year was set as 2040 in the updated traffic study, which is reasonable and consistent with the future year of the latest CCTA Traffic Forecasting Model. The growth rate used to estimate 2040 traffic was derived based on the CCTA model outputs of the base year and future year. This is a common practice.

## Impacts on Emergency Vehicles

Emergency vehicle preemption (EVP) system was recommended in the original study as the mitigation measure for the impact of the proposed project on emergency response time. Opticom, as one of the widely used EVP equipment in the US, was mentioned in the original study. EVP was retained in the updated traffic study to mitigate the impact on emergency response time.

While EVP enables faster emergency response, congestion and gridlock can prevent emergency vehicles from reaching the preemptive detection range at equipped signalized intersections. The priority logic used in the current EVP equipment (e.g., Opticom) does not consider congested queuing conditions such as the one on Pleasant Hill Road as shown in **Figure 1**. The technique that uses queue-based offset to adjust preemption time is still at the research and development stage, and thus not available to use yet.

**Figure 1. Emergency Vehicle Stuck in Traffic Congestion on Pleasant Hill Road**



Our assessment is that EVP equipment (e.g., Opticom) can help reduce emergency response time under non-congested or slightly-congested traffic conditions. However, for a congested and gridlocked arterial such as Pleasant Hill Road during the peak hours, the impact on emergency response time due to additional congestion caused by the proposed project is unlikely to be fully mitigated by installing EVP equipment. No analysis in the updated traffic report has shown emergency response time reduction by using EVP equipment on Pleasant Hill Road. Therefore, this impact is deemed significant and unavoidable.

### **Impacts during Construction**

According to the traffic study report, grading on the proposed project site during construction would result in approximately 25,000 to 30,000 haul trips over a nine-month period. The traffic study assumed five-day work weeks, this would result in an average of approximately 150 haul trips per day, for a total of 300 truck trips (150 arriving empty, 150 leaving full) per day. The traffic study report suggested that large trucks should be prohibited during the hours of 7:00 to 9:00 a.m. and 3:00 to 7:00 p.m. on any school day, and 7:00 to 9:00 a.m. and 4:00-7:00 p.m. on any non-school weekday. This would result in six (6) to seven (7) hours per workday for active hauling operations. However, the traffic study report assumed eight (8) hours per workday instead, which resulted in an average of approximately 40 truck trips per hour. Our estimate is an average of approximately 45 truck trips per hour. This large amount of heavy truck traffic during construction will result in not only excessive intersection delay at the intersection of Pleasant Hill Road and Deer Hill Road/Stanley Boulevard, but also new traffic hazards when changing lanes or making wide turns when maneuvering on Pleasant Hill Road and Deer Hill Road. The updated traffic study report recommended to limit truck traffic to off-peak times, but did not analyze the potential impacts. Analysis should have been performed considering the massive amount of heavy trucks in the grading stage of construction (approximately 45 heavy truck trips per hour). The noise and pollution impacts of this amount of truck activity should be analyzed elsewhere in the CEQA analysis.

### **Weaving Activities**

It was concerned that the proposed project would worsen the weaving condition on Pleasant Hill Road between freeway ramps and nearby intersections, especially when the original design allows full access at the proposed driveway on Pleasant Hill Road. The revised design has prohibited left-turn in/out at this driveway. In addition, the simulation experiments carried out in the updated traffic study show that the additional traffic due to the proposed project has little impact on traffic speeds along this weaving section. However, it was not clear in the updated traffic study report if the simulation models were calibrated to represent the real congestion level on Pleasant Hill Road. If the traffic analysis models were not calibrated, then the models would be unreliable and the conclusions drawn from the analysis would be questionable.

Furthermore, the updated traffic study states that the northbound to westbound left-turn lane at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard will be extended further south. This will result in approximately 600 feet only between the westbound SR 24 to northbound Pleasant Hill Road off-ramp and the extended northbound left-turn lane. Based on the estimated project trip generation, during the PM peak hour, there will be about 30 project-generated vehicles which will have to cross three lanes in order to access the left-turn lane from the off-ramp. Crossing three lanes in this

heavily congested short segment (approximately 600 feet) will not only cause additional delay, but also pose safety risks. However, these impacts were not fully studied or mitigated in the updated traffic study.

### **Impacts on SR 24**

The updated traffic study used delay index to evaluate the impacts of the proposed project on SR 24 between the Caldecott Tunnel and I-680. It was stated in the report that the 2017 MTSO monitoring results for SR 24 overestimated the existing delay index, and therefore the 2013 results were used to estimate the 2019 delay index. As stated earlier, the 2017 MTSO monitoring results were based on INRIX data which has been validated and recognized as a reliable data source. We also performed a quick check using the Google Map peak-period travel times to calculate the delay index, as shown in **Table 2**. It can be seen that the Google Map-based delay indices are similar to the 2017 MTSO delay indices. Our assessment is that the projected delay indices used in the updated traffic study significantly underestimated the congestion level on SR 24.

**Table 2. Travel Time and Delay Index – SR 24**

Direction	Period	Average Travel Time (min)	Free-Flow Travel Time (min)	Delay Index	2017 MTSO Delay Index	2019 Projected (TJKM)
WB	AM Peak	20.3	10	2.03	2.0	1.7
EB	PM Peak	22.9	10	2.29	2.3	1.4

### **Site Access**

As stated in the updated study report, several changes were made in the updated site plan:

- Driveway on Pleasant Hill Road permits only right-turn in/out
- Relocated east driveway on Deer Hill Road permits full access with an exclusive left-turn lane
- Relocated west driveway on Deer Hill Road permits only right-turn in/out and left-turn out with a median refuge lane

Our assessment is that compared to the original design used in the 2012 study, these changes would reduce interruptions to the existing traffic on Pleasant Hill Road and Deer Hill Road. The relocated east driveway on Deer Hill Road is further away from the intersection at Pleasant Hill Road/Deer Hill Road, which would provide more left-turn lane storage and some safety benefits, although allowing left turns out of this driveway could still be problematic given limited visibility, the steepness of Deer Hill Road at this point and the speed and momentum of traffic coming down the hill in off-peak times.

### **Parking Supply inside Development**

The updated study used the same parking requirements by unit size as in the 2012 study. The calculated parking demand is 511 spaces and the updated parking supply is 557 spaces, which is slightly different from the original parking supply of 567 spaces. The conclusion that the project would have a less-than-significant impact on surrounding roadways since parking supply inside the development is sufficient.

### **Passenger Loading and On-Street Parking**



As stated in the updated traffic study report, the proposed project would remove 19 on-street parking spaces along Pleasant Hill Road south of Deer Hill Road. These parking spaces are heavily used especially for student pick-ups in the afternoon for the nearby Acalanes High School, as illustrated in **Figure 2**. It was stated in the report that the new loading area could accommodate approximately eight (8) waiting vehicles. However, there is already an existing passenger loading zone between the intersection of Pleasant Hill Road/Deer Hill Road and the existing parking spaces that accommodate about four (4) vehicles. The net loss of 15 parking spaces (i.e.,  $19+4-8=15$ ) would result in a significant impact on passenger loading in the study area, which contradicts the conclusion in the updated traffic study report.

**Figure 2. Utilization of Existing Passenger Loading Zone & Parking Spaces (West Side of Pleasant Hill Road, South of Deer Hill Road)**



### **Bike Lane**


The proposed bicycle lane between Deer Hill Road and SR 24 on-ramp would be located between the right-turn trap lane and through lanes, as illustrated in **Figure 3**. This will create two major neighboring conflict zones for bicycles, as listed below.

- Conflict zone between bicycles and passenger-loading vehicles, as illustrated in the area circled in orange.
- Conflict zone between bicycles and vehicles in the right-turn trap lane where bicycles need to cross the trap lane, and between bicycles and vehicles entering & exiting the property driveway, as illustrated in the area circled in red.

The updated traffic study did not address these significant conflicts in the neighboring conflict zones between bicycles and vehicles.



**Figure 3. Bicycle Conflict Zones**

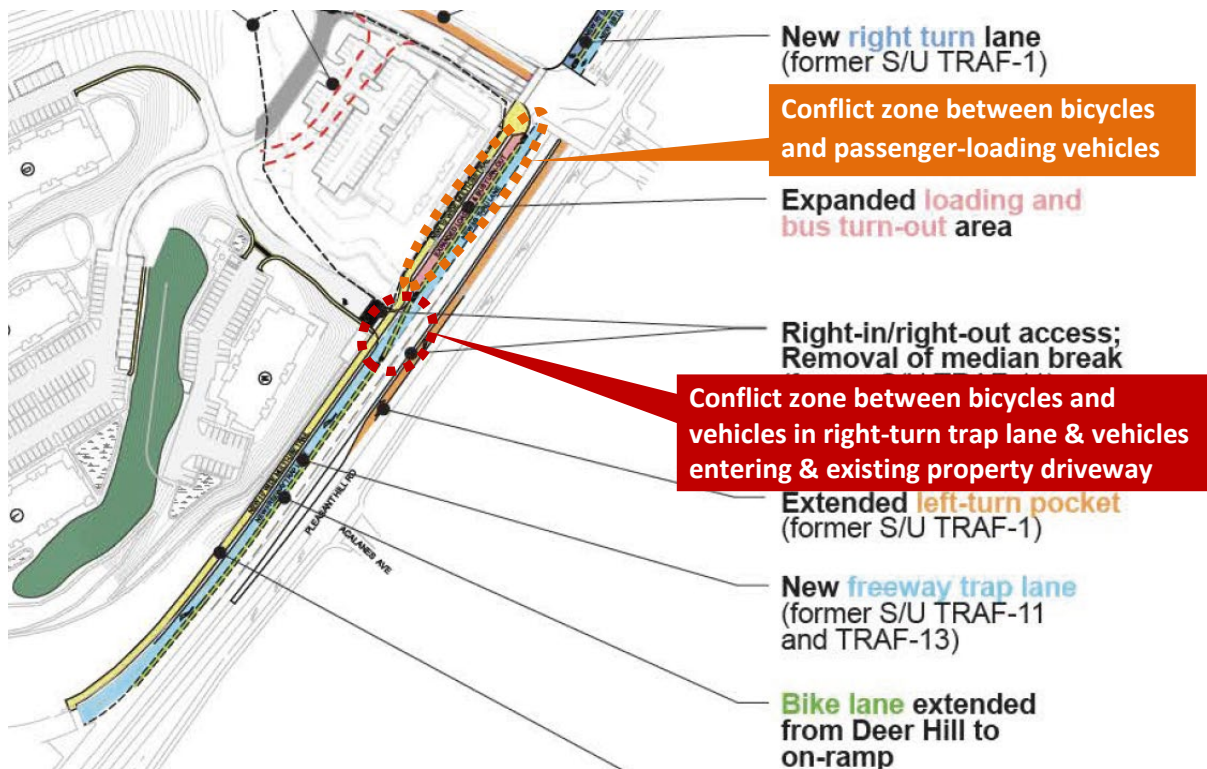


### **Wildfire, PG&E Power Shut-off, and Evacuation Plan**

It is worth noting that the proposed project is located in the Very High Fire Hazard Severity Zones (VHFHSZ) according to the City Ordinance No. 620 (**Figure 4**). Given the facts that: 1) semi-rural/urban interface wildfires have become a new reality; 2) all three fire stations within the study area use Pleasant Hill Road, and 3) all three fire stations fail to meet the target response time of five minutes, the extra delay on Pleasant Hill Road caused by the proposed project would worsen emergency response time as well as resident evacuation.

In addition, PG&E's power shut-offs, as a proactive measure to help avoid wildfires, have been affecting the study area and surrounding areas. As a consequence, affected signalized intersections become all-way-stop-controlled intersections due to traffic signal blackout (which would also affect any proposed EVP system also). It is recommended that the study should include an analysis to quantify the traffic impact of the proposed project under such conditions.

In addition, an evacuation plan for the residents in the area should be considered and how the proposed project would impact evacuation routes and emergency vehicles access if the proposed 315 units are being evacuated at the same time.

**Figure 4. Very High Fire Hazard Severity Zones, City of Lafayette<sup>1</sup>**

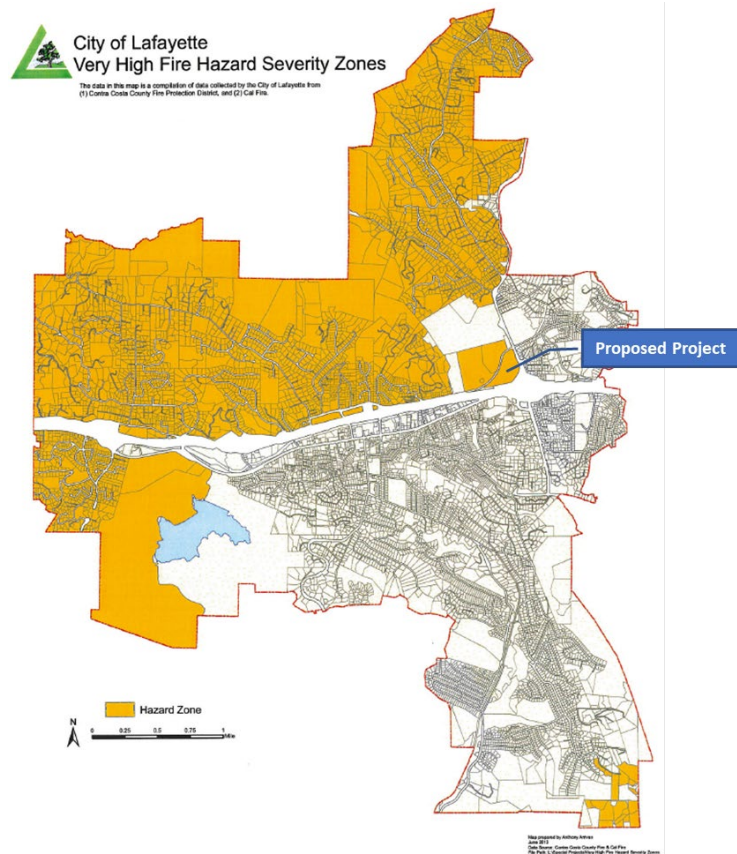

## Other Issues

**Significant and Unavoidable Impacts** – According to the updated traffic study report, the proposed project would result in significant and unavoidable impacts on the level of service at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard and the delay index on Pleasant Hill Road, unless a third southbound through lane were added to Pleasant Hill Road between north of Deer Hill Road and SR-24. However, as discussed earlier, the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road. Therefore, it cannot be claimed for sure that a third southbound through lane will be able to mitigate the proposed project. In addition, the Gateway Constraints Policy outlined in the Lamorinda Action Plan precludes adding more through lanes. Pleasant Hill Road is used as an alternative route by traffic heading south on I-680 in the AM Peak period. One of the rationales for the Gateway Constraints Policy is the recognition that any improvement in through traffic flow on Pleasant Hill Road is likely to attract more traffic from I-680. Therefore, this impact is considered significant and unmitigable.

**Excessive Queue at Laurel Drive/Deer Hill Road** – During our field visit, excessive left-turn queues were observed on the westbound approach of Laurel Drive/Deer Hill Road intersection in the AM peak period. According to the 95<sup>th</sup> percentile queue lengths included in the queuing and blocking reports (Appendix

<sup>1</sup> <https://www.lovelafayette.org/Home/ShowDocument?id=1950>

C, D, E and F in the updated traffic study report), the proposed project would cause significant impact at this intersection under Existing Plus Project scenario. No discussion on this impact or corresponding mitigation measures were mentioned in the updated traffic study.

## SUMMARY

Elite Transportation Group, Inc. (ETG) conducted a peer review of the updated traffic study report for the proposed Terraces of Lafayette project. The following areas are identified either unmitigable or inadequate:

- It was not clear from the updated traffic study report whether the traffic analysis models were calibrated to the local traffic condition before being used for traffic analysis, including queuing and weaving analysis. If the traffic analysis models were not calibrated, then the models would be unreliable and the conclusions drawn from the analysis would be questionable.
- The proposed project would result in significant and unavoidable impacts on the level of service at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard and the delay index on Pleasant Hill Road, unless a third southbound through lane were added to Pleasant Hill Road between north of Deer Hill Road and SR 24. However, the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road. Therefore, it cannot be claimed that a third southbound through lane will certainly be able to mitigate the proposed project. In addition, the Gateway Constraints Policy outlined in the Lamorinda Action Plan precludes adding more through lanes. Pleasant Hill Road is used as an alternative route by traffic heading south on I-680 in the AM Peak period. One of the rationales for the Gateway Constraints Policy is the recognition that any improvement in through traffic flow on Pleasant Hill Road is likely to attract more traffic from I-680. Therefore, this impact is considered significant and unmitigable.
- The updated traffic study stated that the 2017 MTSO monitoring results for Pleasant Hill Road and SR 24 overestimated the existing delay index, therefore, the 2013 results were used to estimate the 2019 delay index. However, the 2017 MTSO results were based on INRIX data, which has been validated and recognized as a reliable data source and has been used in many traffic-related projects. In addition, our travel time runs on Pleasant Hill Road conducted on October 22, 2019, show that the existing delay indices are higher but close to the 2017 monitoring results. The Google map-based delay indices are similar to the 2017 MTSO delay indices on SR 24. Therefore, our assessment is that the projected delay indices used in the updated traffic study significantly underestimated the congestion level on Pleasant Hill Road and SR 24.
- The northbound to westbound left-turn lane at the intersection of Pleasant Hill Road/Deer Hill Road/Stanley Boulevard will be extended further south based on the project site plan and the updated traffic study, which will result in approximately 600 feet only between the westbound SR 24 to northbound Pleasant Hill Road off-ramp and the extended northbound left-turn lane. During the PM peak hour, there will be about 30 project-generated vehicles exiting westbound SR 24 off-ramp which will have to cross three lanes in order to access the northbound left-turn lane. Crossing three lanes in this heavily congested short segment (approximately 600 feet) would not only cause additional delay, but also pose safety risks. However, these impacts were not fully studied or mitigated in the updated traffic study.
- Emergency vehicle preemption (EVP) equipment can help reduce emergency response time under non-congested or slightly-congested traffic conditions. For a congested and gridlocked arterial such as Pleasant Hill Road during peak hours, installing EVP would not fully mitigate the

impact of the proposed project on emergency response time. No analysis in the updated traffic report has shown emergency response time reduction by using EVP equipment on Pleasant Hill Road. This impact is deemed significant and unavoidable.

- The proposed project would remove 19 on-street parking spaces along Pleasant Hill Road south of Deer Hill Road. These parking spaces are heavily used especially for student pick-ups in the afternoon for the nearby Acalanes High School. It was stated in the report that the new loading area could accommodate approximately eight (8) waiting vehicles. The existing passenger loading zone can accommodate about four (4) vehicles. The net loss of 15 parking spaces would result in a significant impact on passenger loading in the study area and therefore deemed significant.
- The proposed bicycle lane between Deer Hill Road and SR 24 on-ramp would be located between the right-turn trap lane and through lanes. This will create major neighboring conflict zones - between bicycles and passenger-loading vehicles, between bicycles and vehicles in the right-turn trap lane where bicycles need to cross the trap lane, and between bicycles and vehicles entering & existing the property driveway. These significant conflicts in the conflict zones were not addressed in the updated traffic study.
- Grading on the proposed project site during construction would result in approximately 25,000 to 30,000 haul trips over a nine-month period. Our estimation shows 45 trucks per hour for seven (7) hours per weekday given that the construction trucks will avoid peak hours. This large amount of heavy truck traffic during construction will result in not only excessive intersection delay at the intersection of Pleasant Hill Road and Deer Hill Road/Stanley Boulevard, but also new traffic hazards when changing lanes or making wide turns when maneuvering on Pleasant Hill Road and Deer Hill Road. The updated traffic study report recommended to limit truck traffic to off-peak times, but did not analyze the potential impacts. Analysis should have been performed considering the massive amount of heavy trucks in the grading stage of construction (approximately 45 heavy truck trips per hour). The noise and pollution impacts of this amount of truck activity should be analyzed elsewhere in the CEQA analysis.
- Considering that the proposed project is located in the Very High Fire Hazard Severity Zones (VHFHSZ), as well as PG&E's power shut-offs as a proactive measure to help avoid wildfires, the study should include an analysis to quantify the traffic impact of the proposed project under such conditions. In addition, an evacuation plan for the residents inside the VHFHSZ needs to be developed or updated, given the new reality of wildfires and proximity to Acalanes High School buildings and student parking lot.
- During the field visit, excessive left-turn queues were observed on the westbound approach at the intersection of Laurel Drive/Deer Hill Road in the AM peak period. According to the 95th percentile queue lengths included in the queuing and blocking reports, the proposed project would cause a significant impact at this intersection under the Plus Project scenarios. No discussion on this impact or corresponding mitigation measures were mentioned in the updated traffic study.

# calanes Union High School District

1212 Pleasant Hill Road, Lafayette, CA 94549

[www.acalanes.k12.ca.us](http://www.acalanes.k12.ca.us)

925-280-3900 ♦ Fax 925-280-3903

## GOVERNING BOARD

Nancy Kendzierski  
*President*

Robert Hockett  
*Clerk*

Craig Cheslog  
*Member*

Kathleen R. Coppersmith  
*Member*

Susan Epstein  
*Member*

Komal Sethi  
*Student Board Member*

## DISTRICT ADMINISTRATION

John T. Nickerson, Ed.D.  
*Superintendent*

Aida Glimme  
*Associate Superintendent,  
Educational Services*

Amy McNamara  
*Associate Superintendent,  
Administrative Services*

Julie Bautista  
*Chief Business Official*

## SCHOOLS

Acalanes Adult Education  
*Walnut Creek*

Acalanes Center for  
Independent Study  
*Walnut Creek*

Acalanes High School  
*Lafayette*

Campolindo High School  
*Moraga*

Las Lomas High School  
*Walnut Creek*

Miramonte High School  
*Orinda*

To whom it may concern:

A group of Acalanes High School parents and students have made me aware increasing congestion on Reliez Valley Road and in the residential neighborhoods surrounding the road in the cities of Pleasant Hill and Lafayette and unincorporated Contra Costa County. The Reliez Valley Road congestion during commute hours has been growing significantly over time as the route seems to be identified in mapping apps as “fastest” and as an alternative for commute traffic that would normally utilize Highways 68/24 or Pleasant Hill Road, thoroughfares that were engineered and designed for commuter volume of traffic.

Reliez Valley Road was not designed for this level of traffic. While I have not studied the flow, nor do I have any training to analyze traffic patterns, I do have significant concern regarding the safety of our students coming to our schools during commute hours from the neighborhoods on and surrounding Reliez Valley Road.

This seems to be a problem that should raise great alarm and action for the agencies that have jurisdiction and can provide regulatory measures to control traffic and address safety issues.

Sincerely,



John Nickerson

Superintendent

Acalanes Union High School District





---

**Acalanes High School**  
***"Home of the Dons"***

1200 Pleasant Hill Rd. Lafayette CA 94349 | (925) 280-3970 | FAX: (925) 280-3971

---

September 27, 2017

To Whom it May Concern:

I received a request to voice my concern regarding the increased traffic on Reliez Valley Road during morning commute time. It is assumed this is due to an increase in the use of driving traffic applications such as "Waze" rerouting "fastest routes" for commuters. While it may very well be that fastest routes are side residential roads, it has been reported to me by multiple students and parents that commute traffic specifically on Reliez Valley Road has significantly impacted traffic safety and the time and stress of students getting to school.

As the principal of Acalanes High School, it is important to me that students have access to a safe route to school. While my background and training is in educational leadership, I do think it is imperative that appropriate city and county agencies evaluate and consider solutions that keep roads designed as local community streets free from heavy outside use and therefore helping our students get to school in a safe and calm manner. We would hate to wait for a tragic accident to be the impetus for the needed regulation and change.

I would also like to highlight that the Acalanes Union High School District as a whole recently changed the school-day schedule to include three "late start days" for students, wherein the first period of instruction is 8:30AM versus, what was for many years standard, 8:00AM. This was done in an effort to allow students an opportunity for more sleep and decreasing student stress as indicated as a high priority for all stakeholders. The current traffic situation on Reliez Valley Road hinders the positive movement made by the school district for those students that have reported having to wake up significantly earlier than previous years to leave before traffic builds.

Please reach out if you have any questions or concerns. I appreciate your consideration of this issue.

Best,

Travis Bell  
Principal  
Acalanes High School



February 1, 2018

To Whom It May Concern:

Residents of the Reliez Valley Road neighborhoods in Lafayette have voiced concerns regarding travelling on Reliez Valley Road, particularly during the A.M. commute.

Based on photographs provided by the neighbors and the personal experiences of Fire District staff moving through the area, there has obviously been a marked increase in congestion through the corridor. Although a significant number of people moving through the area are going to the local schools, the congestion cannot be attributed to school traffic alone. A significant number of vehicles are using Taylor Road, Reliez Valley Road, and Pleasant Hill Road as bypasses to Interstate 680. It is not uncommon for morning traffic on Taylor Road to back up onto Geary Road.

The traffic situation through this area definitely has an impact on fire responses. Engine 2, responding from Geary Road to calls along the Taylor Road corridor, has significantly increased response times during that time of the morning. If there were to be a fire call, or a severe medical call, on Reliez Valley Road, we might experience significant difficulty in getting to the scene. This is the case even if traveling in the non-commute direction because of people passing illegally and just general congestion. Making a left turn across the traffic direction would be especially difficult.

While the traffic situation is a definite concern during the school year, there is not much improvement when school is on break. We bring this to your attention because there is a high level of wildland fire danger in certain areas of Reliez Valley Road. During a high wind event, the combination of high traffic congestion from commuters and potential evacuee traffic could make response into the area very difficult for fire resources.

The Contra Costa County Fire Protection District is supportive of all solutions that would improve the quality of life for the residents along the Reliez Valley Road corridor. Any solutions that help the residents would also improve our ability to respond in the case of an emergency. We do not feel that doing nothing is a viable option.

The Fire District would welcome the opportunity to meet with stakeholders in order to evaluate possible solutions. Please let us know if you identify anything specific that we can do to help.

Sincerely,

  
Jeff Carman  
Fire Chief

**From:** [Kristen Altbaum](#)  
**To:** [dist5@bos.cccounty.us](mailto:dist5@bos.cccounty.us); [njosefowitz@spur.org](mailto:njosefowitz@spur.org)  
**Cc:** [thaile@ccta.net](mailto:thaile@ccta.net); [Jason Chen](#); [Bobadilla, Lisa](#)  
**Subject:** Need advice on getting municipality to prioritize complete streets  
**Date:** Tuesday, April 6, 2021 11:03:56 AM  
**Attachments:** [Elite Transportation Group Evacuation Model .pdf](#)  
[ATT00001.htm](#)  
[Acalanes Principal letter.pdf](#)  
[ATT00002.htm](#)  
[Acalanes Superintendent letter.pdf](#)  
[ATT00003.htm](#)  
[image003.png](#)  
[ATT00004.htm](#)  
[Ltr fm Con Fire re RVR problems.pdf](#)  
[ATT00005.htm](#)  
[Elite Transportation Group Evacuation Model .pdf](#)  
[ATT00006.htm](#)

---

Supervisor Glover, Vice-Chair Josefowitz,

Today I read your comments, Vice-Chair Josefowitz, in The Mercury News  
<https://www.mercurynews.com/2021/04/04/how-can-the-bay-area-keep-pre-covid-traffic-nightmare-from-coming-back/?fbclid=IwAR31hiXLb8zPJdsznvBnNBVpdQJNrRTZyMEuZtH6tkWH6KieBs2lhwDNgMQ>  
and really appreciate your comments regarding MTC wanting to prioritize safe/complete streets. Thank you.

I have comments and a question for you both.

Lafayette staff is trying to add a solo-occupant turn lane, solo-occupant short-link segment, and an unprotected bike lane that has to traverse over more lanes of traffic, to our most congested Pleasant Hill Rd corridor, that has become a preferred WAZE shortcut off hwy 680, in order to appease a developer (O'Brien Homes) wanting to build a 315 unit apartment building at a grade F intersection with > 2.0 delay index (pre covid and determined by Elite Transportation Group, attachment below)...and happens to be in a high risk severity fire zone (attachment below). **How does the public get Lafayette/SWAT/CCTA to understand vision zero/complete streets/multi modal versus solo lanes and unprotected bike lanes on this horribly congested stretch of road that happens to be across from Acalanes high school?** Lafayette actually wants to change the gateway constraint wording in the Lamorinda Action Plan to allow for this solo turn and short-link segment that will do nothing to help with congestion because of the aforementioned WAZE effect. Further, the development was approved without a safe pedestrian bridge. The added Acalanes High School and Springhill Elementary School students walking from the new development will make peak commute travel near impossible, not to mention this intersection will become the most potentially deadly intersection in Lamorinda, probably all of Contra Costa County (the Acalanes School Superintendent and Principal have already voiced concerns over *current* conditions - attachments below).

It appears MTC/CCTA understands what they should do in terms of building safe/complete streets, but municipalities don't follow suit and turn their backs on commuters/tax payers, in favor of poorly designed, deadly roadways that favor solo-occupant vehicle traffic.

Our city staff wishes to change our Gateway wording on page 57 of the Lamorinda Action Plan <https://ccta.net/wp-content/uploads/2018/10/59cd5bd512c34.pdf> to include short link segments (essentially more solo lane capacity), where as I, and many Contra Costa residents, would like to change the existing Gateway wording to:



**The Gateway Constraint Policy would prohibit the addition of any through lanes, including short-link segments, on any portion of Pleasant Hill Road between SR-24 and the Lafayette city limits line north of the intersection with Taylor Boulevard, with the exception of the following:**

- 1) Any lane that accommodates bus and carpool only during peak travel**
- 2) Any *protected* bike / E-bike lane**
- 3) Any safe pedestrian over or under crossings (pedestrian bridge or tunnel)**

Besides attending and speaking at city meetings, SWAT/CCTA, what can residents do? We are eager to see complete streets in our neighborhood and want to hold Lafayette/SWAT/CCTA/MTC accountable to delivering on said priorities.

Looking forward to your responses.

Sincerely,

Kristen Altbaum - Lafayette, Contra Costa County Unincorporated Resident for 22 years  
925-285-8309



August 24, 2020

**Re: Terraces of Lafayette Emergency Evacuation Traffic Impact Study**

Dear Mayor and Council Members

Apologies for the lateness in getting this to you, but we have been working on this since we got the latest TJKM memo on Tuesday. Attached is another memo prepared by Elite that reviews the TJKM memorandum dated August 10, 2020, which was a response to Elite's last memo of August 8, 2020. In addition, Elite has now run various simulations of the TJKM model, firstly to check they could duplicate TJKM's results, which they did, but then to look deeper at the results to answer some critical questions, such as "how many vehicles can actually get out if there was a fire". **Elite's findings are shocking**, and are summarized as follows:

1. Within the Terraces project including the Trap lane, of the 551 cars assumed, only 208 are able to get out in the first hour of the evacuation. 343 will be stuck. If there is no Trap lane **only 16 cars will make it out in the first hour** - 535 cars will be stuck in their driveways and unable to get to Pleasant Hill Road. This directly contradicts what the fire chief has been saying that he is not worried about the Terraces because it is by the freeway.
2. For evacuating traffic from the surrounding area, the situation is also bad. **If there is no trap lane built with the project, an additional 553 neighborhood cars will be stuck in their driveways after the first hour and unable to get to Pleasant Hill Road.** Adding the trap lane drops this to 152 extra cars stuck, but that is still 152 cars too many.
3. This explains TJKM's earlier conclusion that the Terraces only adds 10 to 16 seconds extra delay on Pleasant Hill Road; this is because the majority of evacuation traffic from the Terraces can't even make it to Pleasant Hill Road.
4. Another direct result is that TJKM's assumption that some parents will be able to pick up students from the schools on their way out is invalid – some of these parents don't even make it to Pleasant Hill Road in the first hour.
5. Elite looked at TJKM's response that although they started with an empty network, they did seed the network with some traffic before the evacuation begins. This is true, but TJKM only seeded it with enough traffic to form a back up from Deer Hill Road half way to Springhill Road. See page 8 of TJKM's memo for an illustration. This is not heavy commute hour traffic, and so the model is not being at all conservative in this respect.
6. Note that all these results are based on TJKM's assumption in the model that there will not be any traffic congestion on Highway 24. In fact, the situation will be much worse if Highway 24 is

backed up, which is likely. Elite addresses on page 9 of their memo TJKM's response that Highway 24 traffic does not matter – it does!

7. On page 10 of their memo, Elite also responds to TJKM's claims that the on-ramps to Highway 24 will have the capacity to handle the extra evacuation traffic that will be generated by the Terraces – that is not true.

In summary, it is clear from Elite's comprehensive report that the TJKM evacuation model actually shows that **the Terraces will impose significant safety threats on both the surrounding neighborhood as well as the residents within the project itself** due to the traffic congestion and emergency evacuation delays. You should therefore deny this project at your meeting this evening.

Sincerely,

Colin Elliott on behalf of Michael Griffiths

Attached:

1. Elite Peer Review memo dated 8/23/2020



# Memorandum

**Date:** August 23, 2020

**To:** Michael Griffiths

**From:** Lin Zhang, PhD, PE, TE, PTOE  
Elite Transportation Group, Inc. (ETG)

**Subject:** **Peer Review of TJKM's Evacuation Models and Response Memo for Terraces of Lafayette Traffic Impact Study**

TJKM, the traffic study consultant for the proposed Terraces of Lafayette Project, released a memorandum dated August 10, 2020, in response to ETG's comments regarding TJKM's emergency evacuation modeling and analysis. The purpose of this memorandum is to provide a summary of our latest findings based on a review of the TJKM's response memo and evacuation models.

TJKM's evacuation models were developed for AM and PM peak hours using Synchro/SimTraffic, a commonly used software package for arterial operations. TJKM's evacuation model files were organized for the following six scenarios ("Project" is referred as the Terraces of Lafayette):

- **Evac 1** – Evacuation (without project) in the AM Peak
- **Evac 1 + Project** – Evacuation plus project, with trap lane<sup>1</sup>, in the AM Peak
- **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak
- **Evac 2** – Evacuation (without project) in the PM Peak
- **Evac 2 + Project** – Evacuation plus project, with trap lane, in the PM Peak
- **Evac 2 + Project Variant** – Evacuation plus project, no trap lane, in the PM Peak

In TJKM's memo, "denied entry vehicles", which will be explained in the next, were not reported. We reran SimTraffic simulation for the AM peak scenarios using the Synchro files and the same parameters that TJKM provided, as listed below:

- 5 runs per synchro file
- 10-minute seeding interval
- 60-minute analysis interval
- Random seed 1412

The SimTraffic simulation reports are attached in **Appendix**. We were able to replicate majority of the performance measures that were included in TJKM's memo. In addition, we also reported "denied entry vehicles", for both systemwide and individual intersections (see **Appendix**).

---

<sup>1</sup> The Gateway Constraints Policy outlined in the Lamorinda Action Plan precludes adding more through lanes. Pleasant Hill Road is used as an alternative route by traffic heading south on I-680 in the AM Peak period. One of the rationales for the Gateway Constraints Policy is the recognition that any improvement in through traffic flow on Pleasant Hill Road is likely to attract more traffic from I-680.



## DENIED ENTRY VEHICLES (WAITING TO ENTER THE TRAFFIC NETWORK)

**Denied entry vehicles** (i.e., unserved vehicles) are the vehicles that are still waiting to enter the traffic network by the end of the traffic analysis period. We checked and found many denied entry vehicles in TJKM's evaluation models. For instance, in the AM peak hour evacuation model (7:00-8:00 AM), the number of denied entry vehicles including the Terraces of Lafayette project is **more than 3,400 vehicles** under the trap lane scenario (**Table 1**), or **more than 3,800 vehicles** under the no trap lane scenario (**Table 2**). This means that by 8:00 AM (the end of the traffic analysis period), there would still be more than 3,400 vehicles (under the trap lane scenario), or more than 3,800 vehicles (under the no trap lane scenario), waiting to get onto streets for evacuation.

**Table 1. Systemwide Denied Entry Vehicles – AM Peak, with Project, with Trap Lane**

Interval #1 Information Recording						
Start Time	7:00					
End Time	8:00					
Total Time (min)	60					
Volumes adjusted by PHF.						
Run Number	1	2	3	4	5	Avg
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

**Table 2. Systemwide Denied Entry Vehicles – AM Peak, with Project, No Trap Lane (Project Variant)**

Interval #1 Information Recording						
Start Time	7:00					
End Time	8:00					
Total Time (min)	60					
Volumes adjusted by PHF.						
Run Number	1	2	3	4	5	Avg
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6



We checked the project driveway connecting with Pleasant Hill Road, and saw that the project driveway is still packed with vehicles by the end of the traffic analysis period (see **Figure 1**). We then checked and found that there were more than 500 denied entry vehicles under the trap lane scenario (**Table 3**), or more than 700 denied entry vehicles under the no trap lane scenario (**Table 4**). Only 12 vehicles, or 2%, would be able to get out of the Terraces of Lafayette community during the 7:00-8:00 AM one-hour evacuation period under the no trap lane scenario. Even with the trap lane scenario, only 217 vehicles, or 30%, would be able to get out of the Terraces of Lafayette community. The denied entry vehicles would not show up on the short project driveway. To better visualize the stack of the denied entry vehicles, we “artificially” extended the project driveway, as shown in **Figure 1**. Majority of vehicles could not even leave Terraces of Lafayette community after the one-hour evacuation period.

**Table 3. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, with Trap Lane**

**11: Pleasant Hill Road & Project Dwy Performance by movement**


Movement	EBR	NBT	SBT	All
Denied Delay (hr)	294.0	0.0	0.0	294.0
Denied Del/Veh (s)	1369.0	0.0	0.0	446.0
Total Delay (hr)	7.0	0.0	13.7	20.7
Total Del/Veh (s)	112.7	0.0	31.4	40.6
Stop Delay (hr)	7.5	0.0	11.1	18.6
Stop Del/Veh (s)	120.4	0.0	25.4	36.5
Vehicles Entered	217	39	1561	1817
Vehicles Exited	217	39	1558	1814
Hourly Exit Rate	217	39	1558	1814
Input Volume	735	35	4244	5014
% of Volume	30	111	37	36
Denied Entry Before	31	0	0	31
Denied Entry After	556	0	0	556

**Table 4. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, No Trap Lane (Project Variant)**

**11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	420.6	0.0	0.0	420.6
Denied Del/Veh (s)	1907.0	0.0	0.0	688.9
Total Delay (hr)	7.9	0.0	8.2	16.2
Total Del/Veh (s)	1361.7	0.0	21.5	40.6
Stop Delay (hr)	8.0	0.0	4.7	12.6
Stop Del/Veh (s)	1366.8	0.0	12.2	31.7
Vehicles Entered	13	39	1365	1417
Vehicles Exited	12	39	1365	1416
Hourly Exit Rate	12	39	1365	1416
Input Volume	735	35	4244	5014
% of Volume	2	111	32	28
Denied Entry Before	61	0	0	61
Denied Entry After	781	0	0	781

Figure 1. Pleasant Hill Road & Project Driveway (by end of traffic analysis period in AM peak)

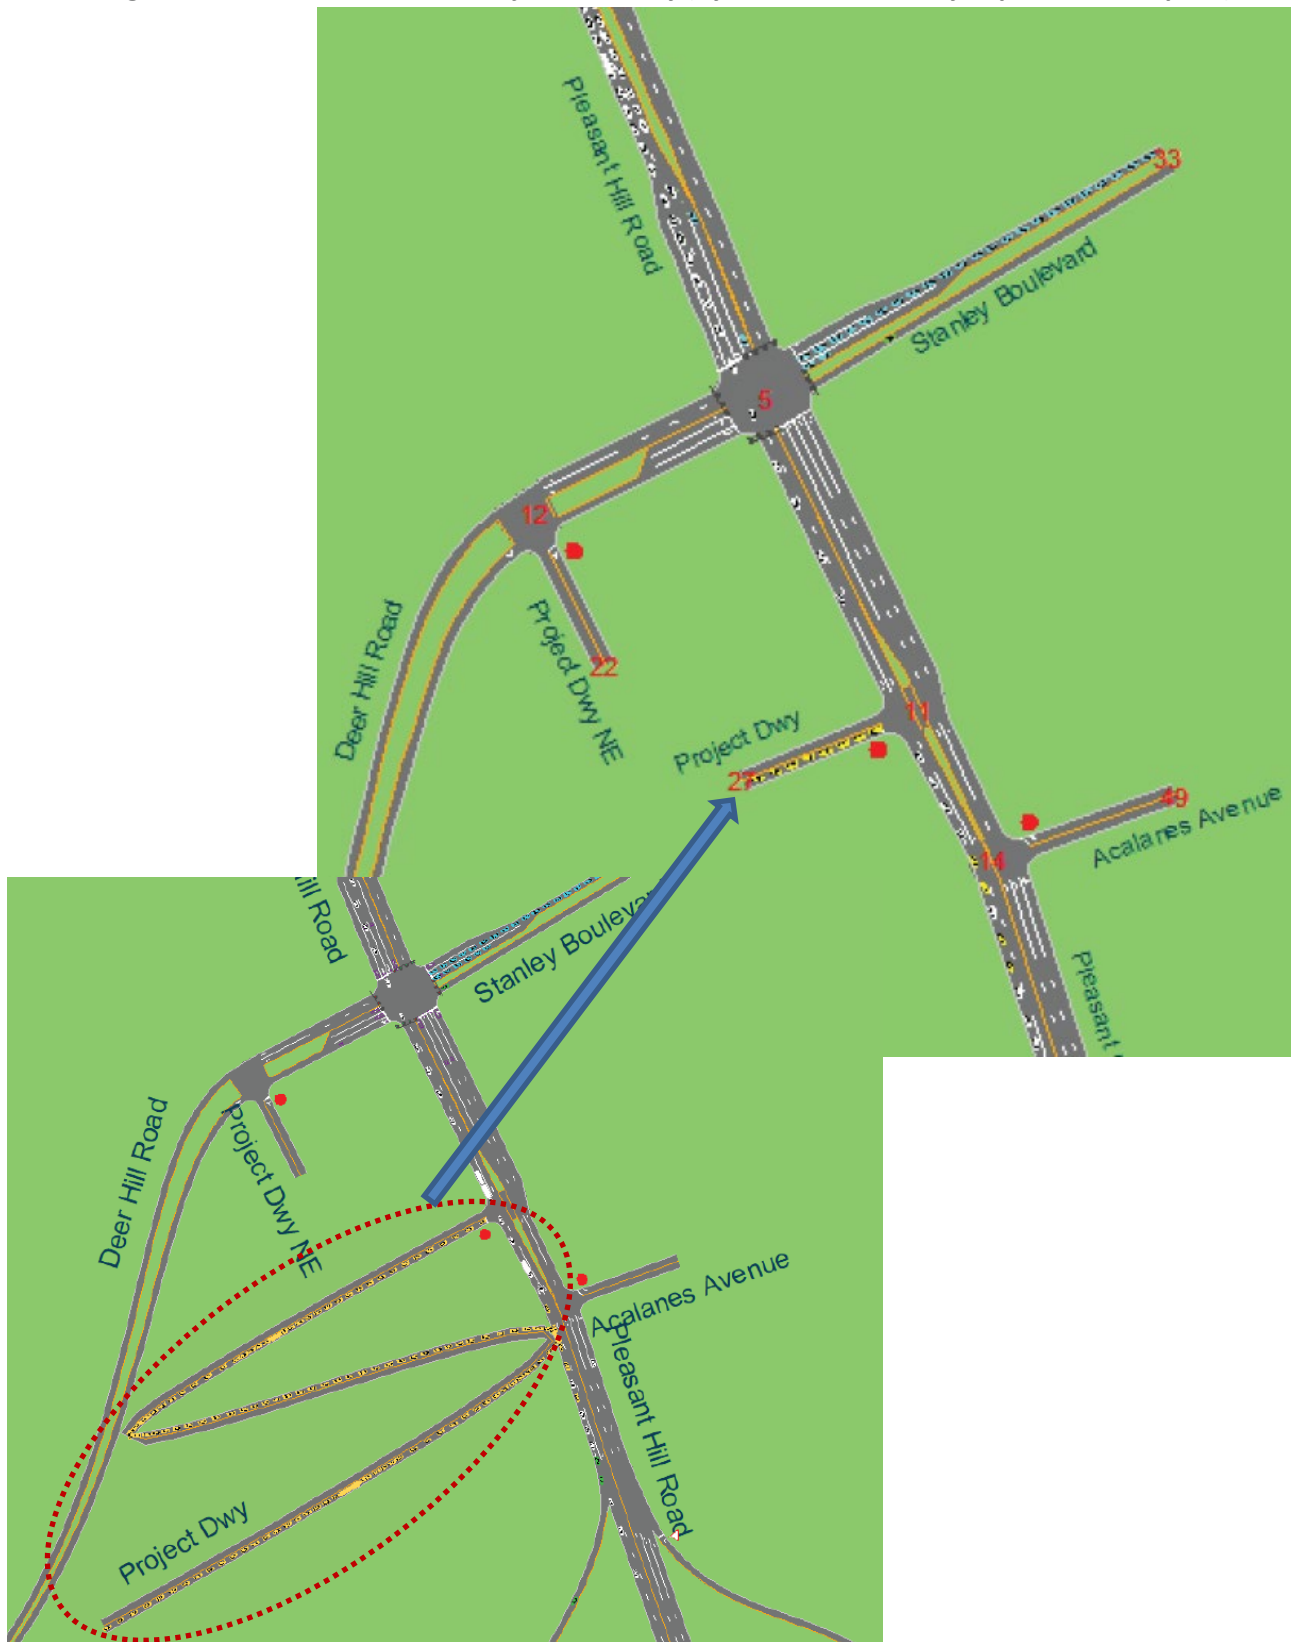



We noticed that TJKM assumed a peak hour factor (PHF) of 0.75 in the evacuation models. The PHF is usually used to convert the hourly traffic volume into the flow rate that represents the busiest 15 minutes of the rush hour.

$$PHF = \frac{\text{Total Hourly Traffic Volume}}{(\text{Peak 15-Minute Traffic Volume with the Hour}) \times 4}$$

Using a PHF of 0.75 means that the analysis flow rate (i.e., peak 15-minute traffic flow rate) is 33.3% more than the hourly traffic volume.

Different from a typical intersection delay and level of service (LOS) analysis, the purpose of an evacuation model is mainly focused on how quickly the evacuation can be achieved. Therefore, using PHFs may not be appropriate for evacuation analyses. We then ran SimTraffic simulation for the AM peak scenarios using the same Synchro files and primary parameters, with the only change of PHF from 0.75 to 1.0. The SimTraffic simulation reports based on PHF of 1.0 are attached in **Appendix**.

Even with a PHF of 1.0, we still found that there would be more than 300 denied entry vehicles under the trap lane scenario (**Table 5**), or more than 500 denied entry vehicles under the no trap lane scenario (**Table 6**). Only 13 vehicles, or 2%, would be able to get out of the Terraces of Lafayette community during the 7:00-8:00 AM one-hour evacuation period under the no trap lane scenario. Even with the trap lane scenario, only 210 vehicles, or 38%, would be able to get out of the Terraces of Lafayette community.

**Table 5. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, with Trap Lane (PHF=1.0)**

#### 11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	205.8	0.0	0.0	205.8
Denied Del/Veh (s)	1266.7	0.0	0.0	341.3
Total Delay (hr)	7.0	0.0	14.4	21.3
Total Del/Veh (s)	115.4	0.0	32.9	42.3
Stop Delay (hr)	7.4	0.0	11.8	19.2
Stop Del/Veh (s)	123.2	0.0	27.0	38.1
Vehicles Entered	211	26	1560	1797
Vehicles Exited	210	26	1556	1792
Hourly Exit Rate	210	26	1556	1792
Input Volume	551	26	3183	3760
% of Volume	38	100	49	48
Denied Entry Before	31	0	0	31
Denied Entry After	374	0	0	374




**Table 6. Denied Entry Vehicles at Project Driveway – AM Peak, with Project, No Trap Lane (Project Variant) (PHF=1.0)****11: Pleasant Hill Road & Project Dwy Performance by movement**

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	333.1	0.0	0.0	333.1
Denied Del/Veh (s)	1956.2	0.0	0.0	598.1
Total Delay (hr)	8.0	0.0	8.0	16.1
Total Del/Veh (s)	1374.8	0.0	21.0	40.7
Stop Delay (hr)	8.1	0.0	4.5	12.5
Stop Del/Veh (s)	1380.2	0.0	11.7	31.7
Vehicles Entered	13	25	1367	1405
Vehicles Exited	13	25	1368	1406
Hourly Exit Rate	13	25	1368	1406
Input Volume	551	26	3183	3760
% of Volume	2	96	43	37
Denied Entry Before	65	0	0	65
Denied Entry After	600	0	0	600

The denied entry vehicles exist on other streets too, including Stanley Boulevard, Spring Hill Road, Quandt Road, and Reliez Valley Road, as shown in **Figure 2**. Keep it in mind that Stanley Boulevard is mainly for evacuating students from Acalanes High School, and denied entry vehicles (i.e., waiting to enter the traffic network) would be more than 900.

With so many denied entry vehicles systemwide (>3,400 vehicles under the trap lane scenario, or >3,800 vehicles under the no trap lane scenario), and 98% of vehicles under the no trap lane scenario (or more than 60% under the trap lane scenario) could not even leave Terraces of Lafayette community after the one-hour evacuation period, TJKM's evacuation models apparently lack credibility and the results coming out of the evacuation models are simply invalid.


Figure 2. Streets with Significant Denied Entry Vehicles (by end of traffic analysis period in AM peak)

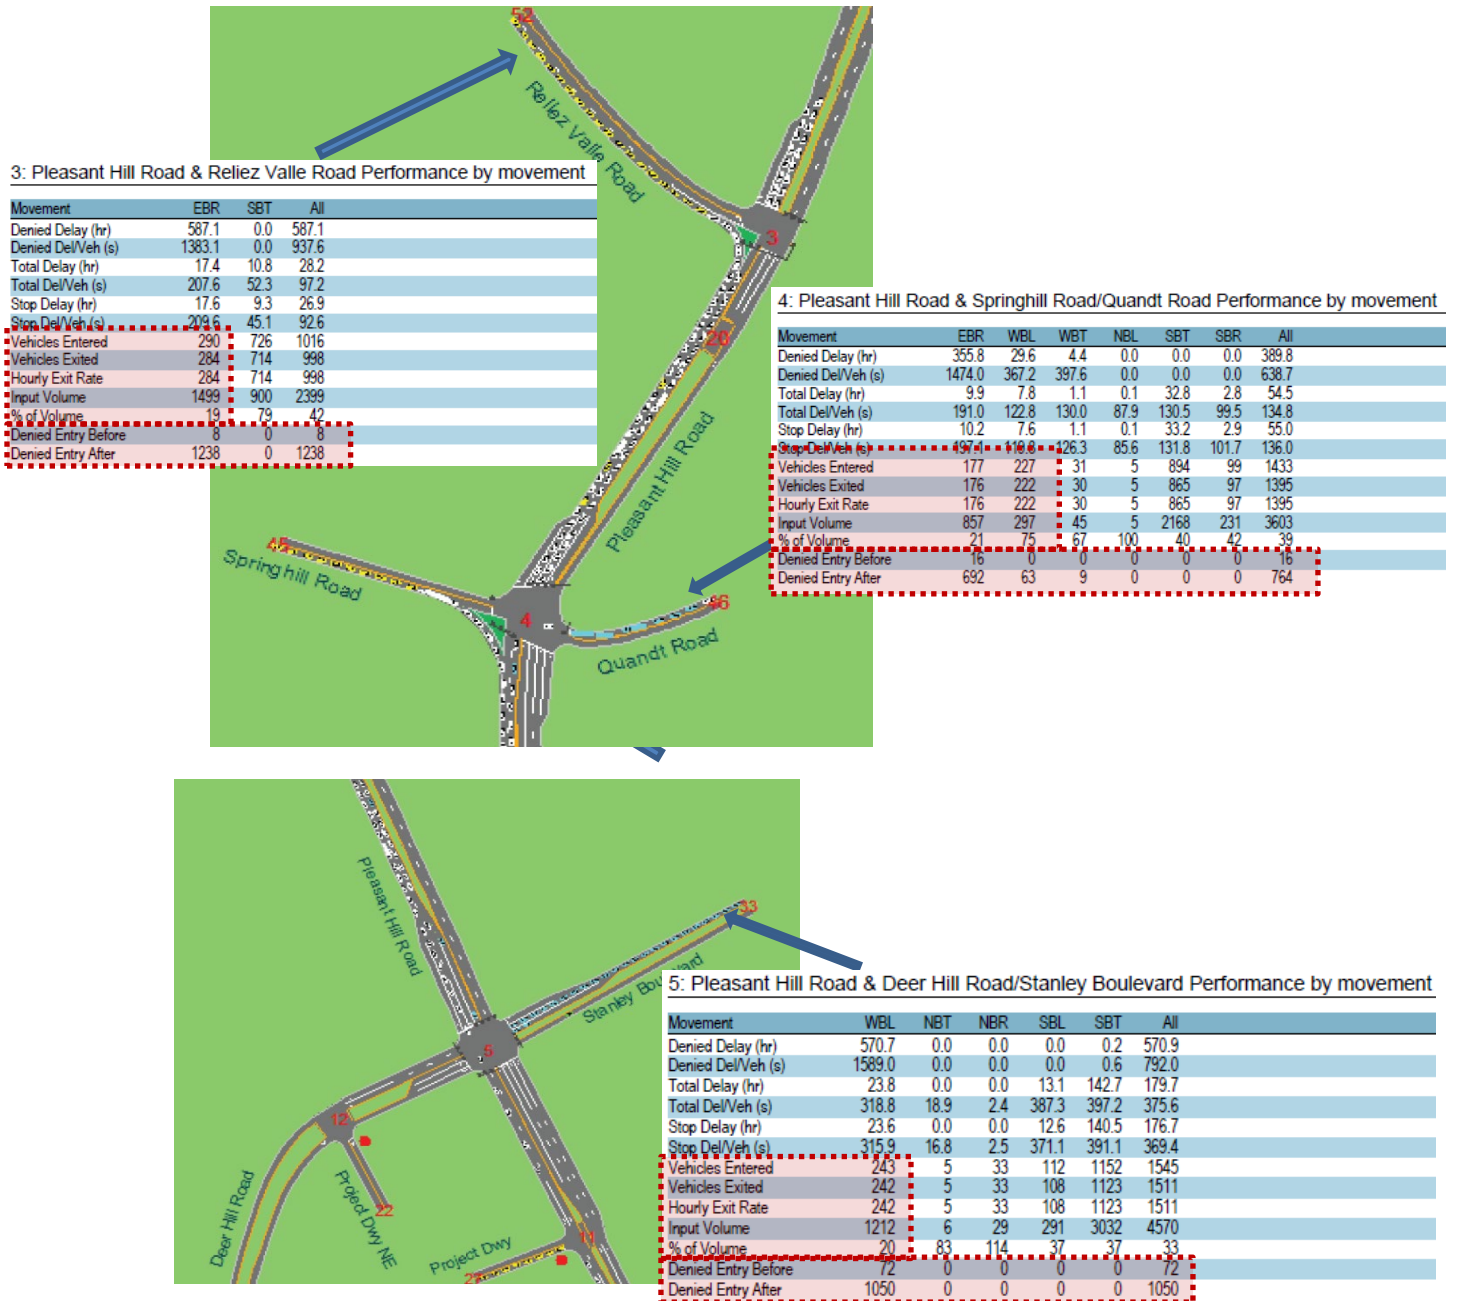

## BACKGROUND TRAFFIC

In their response memo, TJKM mentioned that they included a 10-minute “seeding” period (i.e., 6:50-7:00 AM). We ran the 10-minute seeding period, and found that traffic was only backed up to somewhere between Deer Hill Road/Stanley Boulevard and Spring Hill Road/Quant Road, as shown in **Figure 3**.

**Figure 3. Traffic Condition (by end of 10-minute seeding period in AM peak)**

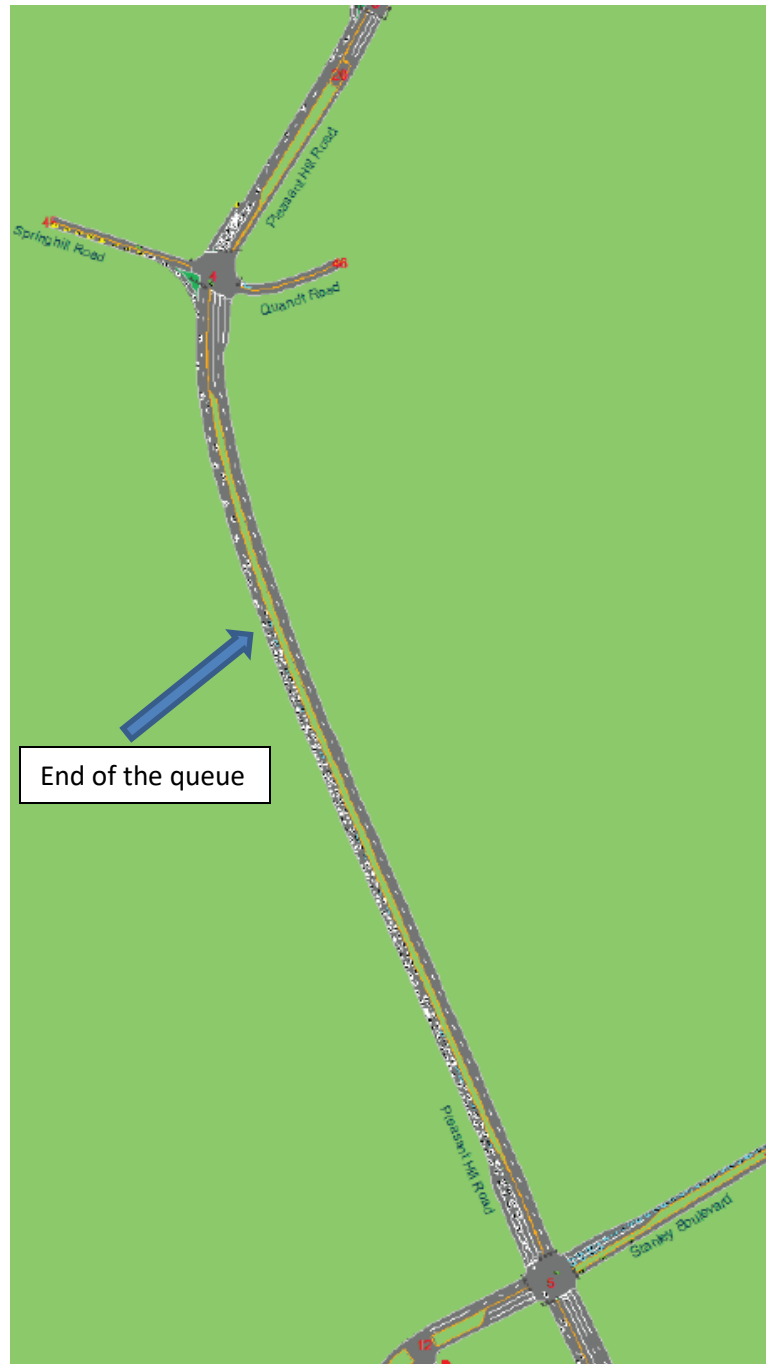



However, it is well known that the Pleasant Hill Road backs up much further upstream at 7:00 AM during the morning peak. There should have been many more vehicles (i.e., “background traffic”) already in the roadway system when the evacuation starts during the AM peak hour.

In their response memo, TJKM claimed that “By including both evacuation traffic and normal commute traffic, these vehicles would be double counted.” This would only be true if all of the traffic on Pleasant Hill Road would come only from Lafayette. However, Pleasant Hill Road carries traffic from many surrounding cities and communities. The right approach is to load the roadway network so that at the beginning of the evacuation (i.e., 7:00 AM during the morning peak), the modeled traffic condition represents what would look like during a normal day without evacuation. After that, no new non-evacuation traffic would enter Pleasant Hill Road from the north once a roadblock has been set up after the evacuation order is given. However, TJKM’s evacuation models did not follow the right approach, and therefore significantly underestimated background traffic. Adding background traffic could make traffic delay exponentially worse.

## SR 24 CAPACITY CONSTRAINT

The evacuation models assumed that all evacuating vehicles would use SR 24 to leave Lafayette – 50% would travel eastbound (EB) and 50% would travel westbound (WB). We raised the question that the evacuation models ended at the on-ramps (both EB and WB) and did not model or put capacity constraints on SR 24 mainline freeway, as illustrated in **Figure 4**. By doing this, TJKM assumed that SR 24 would have “unlimited” capacity to absorb the additional evacuating traffic. This assumption is unrealistic since SR 24 is already congested (WB in AM and EB in PM) and does not have enough extra capacity to accommodate the significant amount increase of traffic due to evacuation.

In their response memo, TJKM did not address this concern directly. It is only simply stated that “the evacuation traffic volumes are already extremely conservative.”

Here is a simple example for the AM peak hour to illustrate the importance of SR 24 capacity constraint. Again, this example is for illustration purposes and it does not replace detailed and accurate modeling.

- Same assumption of all evacuating vehicles would use SR 24 to leave Lafayette – 50% would travel EB and 50% would travel WB.
- In the AM peak hour (7:00-8:00 AM), SR 24 WB has a capacity constraint – assuming 900 vehicles are able to get on and use SR 24 in the WB direction.
- Traffic demand during the evacuation is 1,800 vehicles to use the SR 24 WB on-ramp.
- With the above assumptions, vehicles cannot be fully evacuated in two hours (i.e.,  $1,800/900 = 2$ ). In other words, **one additional hour** is needed after the one-hour peak period. However, with all the above assumptions except for the SR 24 capacity constraint, as modelled by TJKM, vehicles can be fully evacuated within the one-hour peak period.
- Additional evacuating traffic coming out of the Terraces of Lafayette community is 551 vehicles (based on TJKM’s memo dated June 22, 2020). Now adding half of them to the SR 24 WB direction,

the additional 275 vehicles (i.e.,  $551/2 = 275$ ) coming out of the Terraces of Lafayette community would cause additional 18 minutes (i.e.,  $275/900 \times 60 = 18$ ) to evacuate.

Therefore, the evacuation models must have significantly underestimated the level of traffic congestion, and the impacts of which is that traffic is unable to get onto the SR 24 freeway and gets backed up on surface streets.

**Figure 4. Evacuation Models Ended at On-Ramps**



## ON-RAMP CAPACITY CONSTRAINT

We stated in our previous memo that the single-lane on-ramps (both EB and WB) may not be able to handle the significant amount of traffic getting onto SR 24 freeway during the peak hours, with a maximum capacity of 1,900 vehicles per hour per lane at on-ramps assuming no congestion on the freeway onto which the traffic merges. TJKM responded by stating that “it is not an absolute limit, and exceeding 1,900 vehicles per hour per lane does not immediately result in gridlock or excessive delays. In addition, the sections of SR-24 where the westbound and eastbound ramps enter the freeway feature long auxiliary lanes, such that evacuation traffic would have ample time to merge into the other travel lanes without slowing down ramp traffic.”

- On-Ramp Capacity:** TJKM stated that on-ramp maximum capacity of 1,900 vehicles per hour per lane “it is not an absolute limit”. Traffic Engineers generally use 1,900 vehicles under the close to “ideal” condition without traffic congestion or traffic flow breakdown. 1,900 vehicles per hour per lane corresponds to 1.9 seconds in headway (i.e.,  $3,600 \text{ seconds} / 1,900 = 1.9$ ). Headway is a





measure of the temporal space between two vehicles. Specifically, the headway is the time that elapses between the arrival of the leading vehicle and the following vehicle at the designated test point. In fact, on-ramp capacity drops when traffic is congested (traffic flow breakdown), causing “productivity loss”. It is not uncommon to see on-ramp capacity drops to 1,200 vehicles per hour per lane or less when traffic follow breaks down. Under the emergency evacuation condition, traffic typically breaks down due to many factors such as poor visibility (due to smoke), rubbernecking, panicking, etc. We agree that the on-ramp capacity is not an absolute limit; instead, it drops significantly under the emergency evacuation condition. In this perspective, traffic congestion would be even much worse.

- **Auxiliary Lanes:** TJKM stated that “the sections of SR-24 where the westbound and eastbound ramps enter the freeway feature long auxiliary lanes, such that evacuation traffic would have ample time to merge into the other travel lanes without slowing down ramp traffic.” Auxiliary lanes on SR 24 do not help when traffic is already congested (WB in AM and EB in PM) while much more additional traffic is being loaded onto SR 24 due to emergency evacuation.

## CONCLUSION

In conclusion, the evacuation models that TJKM developed has critical fatal flaws. The results generated from the evacuation models are invalid and should not be used for any decision-making.



---

## APPENDIX

### SimTraffic Simulation Reports

- PHF = 0.75 (TJKM's assumption)
  - **Evac 1** – Evacuation (without project) in the AM Peak
  - **Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM Peak
  - **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak
- PHF = 1.0
  - **Evac 1** – Evacuation without project in the AM Peak
  - **Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM Peak
  - **Evac 1 + Project Variant** – Evacuation plus project, no trap lane, in the AM Peak

PHF = 0.75 (TJKM's assumption)

**Evac 1** – Evacuation (without project) in the AM Peak



### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1839	1799	1853	1780	1801	1815
Vehs Exited	1731	1727	1714	1677	1712	1712
Starting Vehs	281	306	248	270	292	279
Ending Vehs	389	378	387	373	381	380
Denied Entry Before	111	134	82	89	97	102
Denied Entry After	3211	3348	3053	3274	3192	3215
Travel Distance (mi)	1650	1646	1657	1635	1633	1644
Travel Time (hr)	1970.3	2079.1	1891.0	2004.2	1963.6	1981.7
Total Delay (hr)	1913.1	2022.1	1833.3	1947.6	1906.9	1924.6
Total Stops	6129	6226	6137	6034	6042	6113
Fuel Used (gal)	490.2	515.2	471.8	497.7	486.6	492.3

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
No data recorded this interval.	

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by PHF.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1839	1799	1853	1780	1801	1815
Vehs Exited	1731	1727	1714	1677	1712	1712
Starting Vehs	281	306	248	270	292	279
Ending Vehs	389	378	387	373	381	380
Denied Entry Before	111	134	82	89	97	102
Denied Entry After	3211	3348	3053	3274	3192	3215
Travel Distance (mi)	1650	1646	1657	1635	1633	1644
Travel Time (hr)	1970.3	2079.1	1891.0	2004.2	1963.6	1981.7
Total Delay (hr)	1913.1	2022.1	1833.3	1947.6	1906.9	1924.6
Total Stops	6129	6226	6137	6034	6042	6113
Fuel Used (gal)	490.2	515.2	471.8	497.7	486.6	492.3

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.2
Total Del/Veh (s)	3.6	6.3	4.1
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	2.8	4.5	3.1
Vehicles Entered	176	36	212
Vehicles Exited	175	36	211
Hourly Exit Rate	175	36	211
Input Volume	173	33	206
% of Volume	101	109	102
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	19.7	0.3	20.1
Total Del/Veh (s)	3.4	144.5	5.2	95.1
Stop Delay (hr)	0.1	18.6	0.2	18.9
Stop Del/Veh (s)	3.5	136.2	3.4	89.3
Vehicles Entered	56	479	212	747
Vehicles Exited	55	467	212	734
Hourly Exit Rate	55	467	212	734
Input Volume	56	637	207	900
% of Volume	98	73	102	82
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	571.5	0.0	571.5
Denied Del/Veh (s)	1365.2	0.0	918.1
Total Delay (hr)	17.5	8.3	25.7
Total Del/Veh (s)	199.0	39.8	87.2
Stop Delay (hr)	17.5	6.7	24.3
Stop Del/Veh (s)	199.8	32.4	82.2
Vehicles Entered	303	734	1037
Vehicles Exited	297	727	1024
Hourly Exit Rate	297	727	1024
Input Volume	1499	900	2399
% of Volume	20	81	43
Denied Entry Before	8	0	8
Denied Entry After	1204	0	1204

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	354.3	42.1	6.4	0.0	0.0	0.0	402.8
Denied Del/Veh (s)	1456.1	485.6	480.4	0.0	0.0	0.0	641.6
Total Delay (hr)	9.9	7.9	1.2	0.1	32.3	2.5	53.8
Total Del/Veh (s)	201.6	123.7	126.0	96.5	123.9	93.5	131.2
Stop Delay (hr)	10.2	7.7	1.1	0.1	32.5	2.6	54.2
Stop Del/Veh (s)	207.6	120.7	121.8	94.2	124.8	94.5	132.0
Vehicles Entered	167	228	33	5	922	97	1452
Vehicles Exited	166	223	32	5	897	94	1417
Hourly Exit Rate	166	223	32	5	897	94	1417
Input Volume	857	297	45	5	2168	231	3603
% of Volume	19	75	71	100	41	41	39
Denied Entry Before	11	1	0	0	0	0	12
Denied Entry After	709	84	15	0	0	0	808

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	573.7	0.0	0.0	0.0	0.0	573.7
Denied Del/Veh (s)	1606.0	0.0	0.0	0.0	0.0	792.8
Total Delay (hr)	23.6	0.0	0.0	13.0	140.8	177.4
Total Del/Veh (s)	320.2	17.2	2.9	373.8	389.2	369.9
Stop Delay (hr)	23.4	0.0	0.0	12.3	137.2	172.9
Stop Del/Veh (s)	317.5	15.6	2.9	353.2	379.4	360.7
Vehicles Entered	238	7	26	112	1174	1557
Vehicles Exited	241	7	26	113	1139	1526
Hourly Exit Rate	241	7	26	113	1139	1526
Input Volume	1212	6	29	291	3032	4570
% of Volume	20	117	90	39	38	33
Denied Entry Before	82	0	0	0	0	82
Denied Entry After	1048	0	0	0	0	1048

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	0.0	0.0
Total Del/Veh (s)	0.1	4.8	4.1
Stop Delay (hr)	0.0	0.0	0.0
Stop Del/Veh (s)	0.0	0.0	0.0
Vehicles Entered	2	11	13
Vehicles Exited	2	11	13
Hourly Exit Rate	2	11	13
Input Volume	7	28	35
% of Volume	29	39	37
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.8	1.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	28	28
Vehicles Exited	28	28
Hourly Exit Rate	28	28
Input Volume	29	29
% of Volume	97	97
Denied Entry Before	0	0
Denied Entry After	0	0

14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.5	4.5
Total Del/Veh (s)	0.3	11.8	11.6
Stop Delay (hr)	0.0	1.4	1.4
Stop Del/Veh (s)	0.0	3.7	3.6
Vehicles Entered	33	1377	1410
Vehicles Exited	33	1376	1409
Hourly Exit Rate	33	1376	1409
Input Volume	35	4244	4279
% of Volume	94	32	33
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.5
Total Del/Veh (s)	0.7	18.8	15.1	16.6
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.2	2.1
Vehicles Entered	33	697	679	1409
Vehicles Exited	33	695	681	1409
Hourly Exit Rate	33	695	681	1409
Input Volume	35	2140	2104	4279
% of Volume	94	32	32	33
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.7	6.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	695	695
Vehicles Exited	695	695
Hourly Exit Rate	695	695
Input Volume	2140	2140
% of Volume	32	32
Denied Entry Before	0	0
Denied Entry After	0	0

### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.1	0.1
Total Delay (hr)	0.0	1.3	1.3
Total Del/Veh (s)	7.3	6.3	6.3
Stop Delay (hr)	0.0	0.6	0.6
Stop Del/Veh (s)	1.7	3.2	3.1
Vehicles Entered	13	716	729
Vehicles Exited	13	716	729
Hourly Exit Rate	13	716	729
Input Volume	35	2140	2175
% of Volume	37	33	34
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### Total Network Performance

Denied Delay (hr)	1613.5
Denied Del/Veh (s)	1154.8
Total Delay (hr)	311.1
Total Del/Veh (s)	535.4
Stop Delay (hr)	289.0
Stop Del/Veh (s)	497.3
Vehicles Entered	1815
Vehicles Exited	1712
Hourly Exit Rate	1712
Input Volume	37038
% of Volume	5
Denied Entry Before	102
Denied Entry After	3215

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.3	20.2	0.1	11
	11	0.0	4.0	0.0	34
Stanley Boulevard	5	17.2	24.2	0.1	12
Quandt Road	4	96.5	141.4	0.4	11
Total		113.9	189.8	0.6	12

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	6.3	21.5	0.2	26
	19	1.3	16.3	0.1	33
Greenvalley Drive	2	5.2	12.0	0.1	21
Reliez Valle Road	3	39.1	63.3	0.3	14
	20	24.2	27.8	0.0	4
Springhill Road	4	123.9	133.4	0.1	3
Deer Hill Road	5	359.4	398.0	0.4	4
	11	19.5	28.0	0.1	10
Acalanes Avenue	14	11.8	15.8	0.0	9
	15	18.8	25.0	0.1	9
	16	6.7	16.1	0.1	24
	17	7.3	16.4	0.1	16
Mt. Diablo Boulevard	6	4.8	12.9	0.1	19
SR 24 EB Off Ramp	7	1.8	4.6	0.1	48
Total		630.0	791.1	1.7	8



# Queuing and Blocking Report

## Evacuation Scenario 1

08/23/2020

### Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	91	48	11
Average Queue (ft)	42	11	1
95th Queue (ft)	73	37	8
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

### Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	56	611	112	55	75
Average Queue (ft)	14	562	73	12	31
95th Queue (ft)	35	664	112	37	63
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		82	84		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		76			
Queuing Penalty (veh)		0			

### Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	467	486	360	366
Average Queue (ft)	283	457	200	198
95th Queue (ft)	631	473	292	304
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	33	96		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				34
Queuing Penalty (veh)				0

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	370	255	20	523	520	96	217	222
Average Queue (ft)	338	231	3	470	470	76	169	181
95th Queue (ft)	355	246	15	612	625	140	262	266
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	89		86	88		28	86
Queuing Penalty (veh)	0	0		1036	1053		331	1036
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				87	81	0		
Queuing Penalty (veh)				0	188	3		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	554	32	47	275	2267	2401
Average Queue (ft)	194	524	3	11	183	2238	2366
95th Queue (ft)	304	543	17	34	335	2325	2480
Link Distance (ft)		504	347	347		2220	2220
Upstream Blk Time (%)		95				40	94
Queuing Penalty (veh)		0				672	1556
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	9	97			6	28	66
Queuing Penalty (veh)	52	587			88	81	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

## Queuing and Blocking Report

### Evacuation Scenario 1

08/23/2020

#### Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	3
Average Queue (ft)	0
95th Queue (ft)	2
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

#### Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

#### Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	B11	B11
Directions Served	T	T	T	T
Maximum Queue (ft)	190	254	400	387
Average Queue (ft)	45	206	186	334
95th Queue (ft)	142	305	430	436
Link Distance (ft)	147	147	347	347
Upstream Blk Time (%)	1	20	1	7
Queuing Penalty (veh)	17	428	25	146
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	361
Average Queue (ft)	183
95th Queue (ft)	427
Link Distance (ft)	266
Upstream Blk Time (%)	6
Queuing Penalty (veh)	117
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement	SB
Directions Served	TR
Maximum Queue (ft)	217
Average Queue (ft)	80
95th Queue (ft)	174
Link Distance (ft)	314
Upstream Blk Time (%)	0
Queuing Penalty (veh)	0
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Network Summary

---

Network wide Queuing Penalty: 7415

---

PHF = 0.75 (TJKM's assumption)

**Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM  
Peak

### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
No data recorded this interval.	

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by PHF.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	2263	2295	2244	2328	2313	2288
Vehs Exited	2102	2093	2083	2150	2194	2124
Starting Vehs	258	221	256	240	270	249
Ending Vehs	419	423	417	418	389	413
Denied Entry Before	144	118	171	165	170	154
Denied Entry After	3606	3495	3527	3411	3573	3521
Travel Distance (mi)	1958	1940	1912	1998	1993	1960
Travel Time (hr)	2184.8	2082.6	2177.1	2092.5	2164.7	2140.3
Total Delay (hr)	2116.4	2014.8	2109.6	2022.3	2095.0	2071.6
Total Stops	8764	8548	8324	9019	8972	8724
Fuel Used (gal)	547.6	524.9	544.9	528.3	545.2	538.2

### 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.2
Total Del/Veh (s)	3.8	5.4	4.1
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	2.9	3.8	3.0
Vehicles Entered	177	34	211
Vehicles Exited	176	33	209
Hourly Exit Rate	176	33	209
Input Volume	173	33	206
% of Volume	102	100	101
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	20.1	0.3	20.5
Total Del/Veh (s)	3.9	148.6	5.7	97.7
Stop Delay (hr)	0.1	19.1	0.2	19.4
Stop Del/Veh (s)	4.1	140.8	3.9	92.2
Vehicles Entered	59	475	209	743
Vehicles Exited	59	464	209	732
Hourly Exit Rate	59	464	209	732
Input Volume	56	637	207	900
% of Volume	105	73	101	81
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0



### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	400.7	0.0	400.7
Denied Del/Veh (s)	962.4	0.0	646.6
Total Delay (hr)	15.4	6.5	21.8
Total Del/Veh (s)	88.9	31.0	57.3
Stop Delay (hr)	13.7	5.1	18.8
Stop Del/Veh (s)	79.2	24.6	49.4
Vehicles Entered	609	732	1341
Vehicles Exited	606	725	1331
Hourly Exit Rate	606	725	1331
Input Volume	1499	900	2399
% of Volume	40	81	55
Denied Entry Before	7	0	7
Denied Entry After	890	0	890

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	381.4	20.4	3.7	0.0	0.0	0.0	405.4
Denied Del/Veh (s)	1544.3	254.1	269.8	0.0	0.0	0.0	570.4
Total Delay (hr)	9.2	7.5	1.4	0.1	21.9	2.0	42.0
Total Del/Veh (s)	224.5	108.8	117.4	81.8	65.0	53.8	84.7
Stop Delay (hr)	9.4	7.2	1.3	0.1	19.4	1.8	39.3
Stop Del/Veh (s)	229.7	104.7	112.5	81.0	57.8	50.3	79.3
Vehicles Entered	138	247	42	5	1198	129	1759
Vehicles Exited	137	244	41	5	1175	128	1730
Hourly Exit Rate	137	244	41	5	1175	128	1730
Input Volume	857	297	45	5	2168	231	3603
% of Volume	16	82	91	100	54	55	48
Denied Entry Before	40	0	0	0	0	0	40
Denied Entry After	751	42	7	0	0	0	800

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	564.4	0.0	0.0	0.0	0.0	564.4
Denied Del/Veh (s)	1578.8	0.0	0.0	0.0	0.0	725.7
Total Delay (hr)	21.7	0.0	0.0	3.5	24.7	50.0
Total Del/Veh (s)	326.5	12.8	3.7	97.3	64.6	100.7
Stop Delay (hr)	21.5	0.0	0.0	3.3	21.4	46.2
Stop Del/Veh (s)	323.2	11.6	3.9	91.1	55.9	93.1
Vehicles Entered	214	7	32	128	1346	1727
Vehicles Exited	215	7	32	128	1346	1728
Hourly Exit Rate	215	7	32	128	1346	1728
Input Volume	1212	6	29	291	3032	4570
% of Volume	18	117	110	44	44	38
Denied Entry Before	72	0	0	0	0	72
Denied Entry After	1073	0	0	0	0	1073

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	6.2	6.2
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	8	8
Vehicles Exited	8	8
Hourly Exit Rate	8	8
Input Volume	35	35
% of Volume	23	23
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.9	1.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	34	34
Vehicles Exited	34	34
Hourly Exit Rate	34	34
Input Volume	35	35
% of Volume	97	97
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	294.0	0.0	0.0	294.0
Denied Del/Veh (s)	1369.0	0.0	0.0	446.0
Total Delay (hr)	7.0	0.0	13.7	20.7
Total Del/Veh (s)	112.7	0.0	31.4	40.6
Stop Delay (hr)	7.5	0.0	11.1	18.6
Stop Del/Veh (s)	120.4	0.0	25.4	36.5
Vehicles Entered	217	39	1561	1817
Vehicles Exited	217	39	1558	1814
Hourly Exit Rate	217	39	1558	1814
Input Volume	735	35	4244	5014
% of Volume	30	111	37	36
Denied Entry Before	31	0	0	31
Denied Entry After	556	0	0	556

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	8.4	8.4
Total Del/Veh (s)	0.3	16.9	16.6
Stop Delay (hr)	0.0	8.1	8.1
Stop Del/Veh (s)	0.0	16.4	16.1
Vehicles Entered	39	1775	1814
Vehicles Exited	39	1768	1807
Hourly Exit Rate	39	1768	1807
Input Volume	35	4979	5014
% of Volume	111	36	36
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.4	1.6	12.0
Total Del/Veh (s)	0.7	41.4	6.8	23.9
Stop Delay (hr)	0.0	11.6	0.2	11.9
Stop Del/Veh (s)	0.0	46.5	0.9	23.6
Vehicles Entered	39	898	869	1806
Vehicles Exited	39	890	869	1798
Hourly Exit Rate	39	890	869	1798
Input Volume	35	2507	2472	5014
% of Volume	111	36	35	36
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	16.4	16.4
Total Del/Veh (s)	65.5	65.6
Stop Delay (hr)	18.7	18.7
Stop Del/Veh (s)	74.5	74.5
Vehicles Entered	890	890
Vehicles Exited	884	884
Hourly Exit Rate	884	884
Input Volume	2507	2507
% of Volume	35	35
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.2	19.5	19.7
Denied Del/Veh (s)	93.6	76.9	77.0
Total Delay (hr)	0.1	14.9	15.1
Total Del/Veh (s)	64.0	60.2	60.2
Stop Delay (hr)	0.2	17.4	17.6
Stop Del/Veh (s)	70.0	70.2	70.2
Vehicles Entered	8	876	884
Vehicles Exited	8	875	883
Hourly Exit Rate	8	875	883
Input Volume	35	2507	2542
% of Volume	23	35	35
Denied Entry Before	0	2	2
Denied Entry After	0	37	37

---

Total Network Performance

---

Denied Delay (hr)	1758.9
Denied Del/Veh (s)	1090.0
Total Delay (hr)	312.7
Total Del/Veh (s)	443.8
Stop Delay (hr)	287.8
Stop Del/Veh (s)	408.4
Vehicles Entered	2288
Vehicles Exited	2124
Hourly Exit Rate	2124
Input Volume	44058
% of Volume	5
Denied Entry Before	154
Denied Entry After	3521

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.3	20.3	0.1	11
Project Dwy	11	0.0	4.1	0.0	33
Stanley Boulevard	5	12.8	19.5	0.1	15
	37	1.7	9.9	0.1	30
Quandt Road	4	81.8	118.9	0.4	11
Total		96.5	172.8	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.4	20.8	0.2	26
	19	1.1	15.6	0.1	34
Greenvalley Drive	2	5.7	12.5	0.1	21
Reliez Valle Road	3	28.0	51.8	0.3	17
	20	14.3	18.0	0.0	7
Springhill Road	4	65.0	74.5	0.1	5
	37	198.8	234.1	0.4	6
Deer Hill Road	5	64.6	72.6	0.1	4
Project Dwy	11	31.6	40.1	0.1	7
Acalanes Avenue	14	17.6	21.7	0.0	6
	15	41.4	47.5	0.1	5
	16	65.5	74.9	0.1	5
	17	64.0	166.8	0.1	3
Mt. Diablo Boulevard	6	6.2	14.2	0.1	17
SR 24 EB Off Ramp	7	1.9	4.7	0.1	48
Total		611.1	869.5	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

AM PEAK  
08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	83	37	16
Average Queue (ft)	43	9	1
95th Queue (ft)	72	31	9
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	60	607	112	64	71
Average Queue (ft)	15	567	73	15	32
95th Queue (ft)	39	637	109	45	64
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		85	87		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		77		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	454	488	332	355
Average Queue (ft)	271	459	183	195
95th Queue (ft)	627	478	280	308
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	18	83		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				30
Queuing Penalty (veh)				0



Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	365	272	24	512	519	96	208	214
Average Queue (ft)	337	235	3	379	380	71	103	125
95th Queue (ft)	354	256	15	625	640	139	241	277
Link Distance (ft)	318	217		406	406		127	127
Upstream Blk Time (%)	100	82		42	52		13	46
Queuing Penalty (veh)	0	0		502	621		153	551
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				56	58	0		
Queuing Penalty (veh)				0	133	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB	SB	B37	B37
Directions Served	L	LT	T	R	L	T	T	T	T	T
Maximum Queue (ft)	225	556	21	34	275	446	446	450	1878	2010
Average Queue (ft)	110	524	2	11	175	373	393	413	1622	1741
95th Queue (ft)	276	543	14	33	309	521	443	458	2450	2592
Link Distance (ft)		504	342	342		351	351	351	1832	1832
Upstream Blk Time (%)		96				26	36	40	20	76
Queuing Penalty (veh)		0				285	395	439	340	1267
Storage Bay Dist (ft)	185				175					
Storage Blk Time (%)	0	92			8	6		60		
Queuing Penalty (veh)	0	558			80	19		0		

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	7
Average Queue (ft)	0
95th Queue (ft)	6
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB	SB
Directions Served	R	T	T	TR
Maximum Queue (ft)	216	390	391	394
Average Queue (ft)	183	154	327	324
95th Queue (ft)	199	383	459	484
Link Distance (ft)	164	342	342	342
Upstream Blk Time (%)	100	2	14	11
Queuing Penalty (veh)	0	21	201	159
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	SB
Directions Served	T	T	T
Maximum Queue (ft)	166	267	238
Average Queue (ft)	34	230	174
95th Queue (ft)	110	305	277
Link Distance (ft)	152	152	152
Upstream Blk Time (%)	1	94	11
Queuing Penalty (veh)	10	1555	180
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 15: Pleasant Hill Road

Movement	SB	SB	SB
Directions Served	T	T	R
Maximum Queue (ft)	60	369	287
Average Queue (ft)	12	336	103
95th Queue (ft)	50	408	228
Link Distance (ft)	262	262	262
Upstream Blk Time (%)		96	0
Queuing Penalty (veh)		1586	5
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 16: Pleasant Hill Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	540
Average Queue (ft)	512
95th Queue (ft)	545
Link Distance (ft)	302
Upstream Blk Time (%)	99
Queuing Penalty (veh)	1240
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 17: Pleasant Hill Road

Movement	SB	SB
Directions Served	T	TR
Maximum Queue (ft)	125	532
Average Queue (ft)	4	506
95th Queue (ft)	63	530
Link Distance (ft)	314	314
Upstream Blk Time (%)	0	99
Queuing Penalty (veh)	0	830
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Network Summary

Network wide Queuing Penalty: 11131
-------------------------------------

PHF = 0.75 (TJKM's assumption)

**Evac 1 + Project Variant**– Evacuation plus project, no trap lane, in the  
AM Peak

### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10

No data recorded this interval.

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60

Volumes adjusted by PHF.

Run Number	1	2	3	4	5	Avg
Vehs Entered	1791	1861	1881	1826	1818	1836
Vehs Exited	1693	1741	1734	1705	1729	1721
Starting Vehs	305	291	290	275	312	295
Ending Vehs	403	411	437	396	401	410
Denied Entry Before	150	161	149	162	161	157
Denied Entry After	4006	3989	3958	4088	3989	4005
Travel Distance (mi)	1583	1638	1617	1626	1663	1625
Travel Time (hr)	2421.0	2442.9	2410.2	2434.6	2418.7	2425.5
Total Delay (hr)	2365.5	2385.8	2353.9	2378.2	2361.2	2368.9
Total Stops	5726	6207	5810	6056	6244	6009
Fuel Used (gal)	590.3	597.6	588.3	594.4	592.5	592.6

### 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.2	0.1	0.3
Total Del/Veh (s)	3.9	7.2	4.4
Stop Delay (hr)	0.1	0.0	0.2
Stop Del/Veh (s)	3.0	5.4	3.4
Vehicles Entered	173	31	204
Vehicles Exited	174	31	205
Hourly Exit Rate	174	31	205
Input Volume	173	33	206
% of Volume	101	94	100
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 2: Pleasant Hill Road & Greenvally Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.1	20.0	0.3	20.3
Total Del/Veh (s)	3.4	148.1	5.0	97.5
Stop Delay (hr)	0.1	18.9	0.2	19.2
Stop Del/Veh (s)	3.6	140.1	3.3	91.8
Vehicles Entered	60	476	205	741
Vehicles Exited	60	462	204	726
Hourly Exit Rate	60	462	204	726
Input Volume	56	637	207	900
% of Volume	107	73	99	81
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0



### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	587.1	0.0	587.1
Denied Del/Veh (s)	1383.1	0.0	937.6
Total Delay (hr)	17.4	10.8	28.2
Total Del/Veh (s)	207.6	52.3	97.2
Stop Delay (hr)	17.6	9.3	26.9
Stop Del/Veh (s)	209.6	45.1	92.6
Vehicles Entered	290	726	1016
Vehicles Exited	284	714	998
Hourly Exit Rate	284	714	998
Input Volume	1499	900	2399
% of Volume	19	79	42
Denied Entry Before	8	0	8
Denied Entry After	1238	0	1238

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	355.8	29.6	4.4	0.0	0.0	0.0	389.8
Denied Del/Veh (s)	1474.0	367.2	397.6	0.0	0.0	0.0	638.7
Total Delay (hr)	9.9	7.8	1.1	0.1	32.8	2.8	54.5
Total Del/Veh (s)	191.0	122.8	130.0	87.9	130.5	99.5	134.8
Stop Delay (hr)	10.2	7.6	1.1	0.1	33.2	2.9	55.0
Stop Del/Veh (s)	197.1	119.8	126.3	85.6	131.8	101.7	136.0
Vehicles Entered	177	227	31	5	894	99	1433
Vehicles Exited	176	222	30	5	865	97	1395
Hourly Exit Rate	176	222	30	5	865	97	1395
Input Volume	857	297	45	5	2168	231	3603
% of Volume	21	75	67	100	40	42	39
Denied Entry Before	16	0	0	0	0	0	16
Denied Entry After	692	63	9	0	0	0	764

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	570.7	0.0	0.0	0.0	0.2	570.9
Denied Del/Veh (s)	1589.0	0.0	0.0	0.0	0.6	792.0
Total Delay (hr)	23.8	0.0	0.0	13.1	142.7	179.7
Total Del/Veh (s)	318.8	18.9	2.4	387.3	397.2	375.6
Stop Delay (hr)	23.6	0.0	0.0	12.6	140.5	176.7
Stop Del/Veh (s)	315.9	16.8	2.5	371.1	391.1	369.4
Vehicles Entered	243	5	33	112	1152	1545
Vehicles Exited	242	5	33	108	1123	1511
Hourly Exit Rate	242	5	33	108	1123	1511
Input Volume	1212	6	29	291	3032	4570
% of Volume	20	83	114	37	37	33
Denied Entry Before	72	0	0	0	0	72
Denied Entry After	1050	0	0	0	0	1050

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.4	4.4
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	10	10
Vehicles Exited	10	10
Hourly Exit Rate	10	10
Input Volume	35	35
% of Volume	29	29
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.7	1.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.1	0.1
Vehicles Entered	35	35
Vehicles Exited	35	35
Hourly Exit Rate	35	35
Input Volume	35	35
% of Volume	100	100
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	420.6	0.0	0.0	420.6
Denied Del/Veh (s)	1907.0	0.0	0.0	688.9
Total Delay (hr)	7.9	0.0	8.2	16.2
Total Del/Veh (s)	1361.7	0.0	21.5	40.6
Stop Delay (hr)	8.0	0.0	4.7	12.6
Stop Del/Veh (s)	1366.8	0.0	12.2	31.7
Vehicles Entered	13	39	1365	1417
Vehicles Exited	12	39	1365	1416
Hourly Exit Rate	12	39	1365	1416
Input Volume	735	35	4244	5014
% of Volume	2	111	32	28
Denied Entry Before	61	0	0	61
Denied Entry After	781	0	0	781

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.8	4.8
Total Del/Veh (s)	0.2	12.4	12.1
Stop Delay (hr)	0.0	1.7	1.7
Stop Del/Veh (s)	0.0	4.3	4.2
Vehicles Entered	39	1377	1416
Vehicles Exited	39	1376	1415
Hourly Exit Rate	39	1376	1415
Input Volume	35	4979	5014
% of Volume	111	28	28
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.6	3.0	6.6
Total Del/Veh (s)	0.6	19.1	15.3	16.7
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.1	2.1
Vehicles Entered	39	676	701	1416
Vehicles Exited	39	676	701	1416
Hourly Exit Rate	39	676	701	1416
Input Volume	35	2507	2472	5014
% of Volume	111	27	28	28
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.2	1.2
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	676	676
Vehicles Exited	675	675
Hourly Exit Rate	675	675
Input Volume	2507	2507
% of Volume	27	27
Denied Entry Before	0	0
Denied Entry After	0	0

17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	1.0	1.0
Total Del/Veh (s)	6.9	5.0	5.1
Stop Delay (hr)	0.0	0.4	0.4
Stop Del/Veh (s)	1.0	2.0	2.0
Vehicles Entered	10	700	710
Vehicles Exited	10	699	709
Hourly Exit Rate	10	699	709
Input Volume	35	2507	2542
% of Volume	29	28	28
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

---

Total Network Performance

---

Denied Delay (hr)	2043.4
Denied Del/Veh (s)	1259.4
Total Delay (hr)	325.5
Total Del/Veh (s)	549.9
Stop Delay (hr)	305.5
Stop Del/Veh (s)	516.0
Vehicles Entered	1836
Vehicles Exited	1721
Hourly Exit Rate	1721
Input Volume	40731
% of Volume	4
Denied Entry Before	157
Denied Entry After	4005

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	34
Stanley Boulevard	5	18.9	26.8	0.1	11
Quandt Road	4	87.9	129.0	0.4	12
Total		107.0	180.0	0.6	12

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	7.2	22.7	0.2	24
	19	1.3	15.6	0.1	34
Greenvalley Drive	2	5.0	11.8	0.1	22
Reliez Valle Road	3	49.1	72.3	0.3	12
	20	26.2	29.9	0.0	4
Springhill Road	4	130.5	139.9	0.1	3
Deer Hill Road	5	360.6	399.0	0.4	4
Project Dwy	11	20.9	29.5	0.1	10
Acalanes Avenue	14	12.5	16.6	0.0	8
	15	19.1	25.3	0.1	9
	16	6.6	16.0	0.1	24
	17	6.9	16.3	0.1	16
Mt. Diablo Boulevard	6	4.4	12.9	0.1	19
SR 24 EB Off Ramp	7	1.7	4.5	0.1	49
Total		652.1	812.3	1.7	7

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

AM PEAK  
08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	91	41	22
Average Queue (ft)	45	11	1
95th Queue (ft)	75	34	9
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	51	611	114	53	79
Average Queue (ft)	14	566	74	11	29
95th Queue (ft)	35	656	113	34	66
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		84	87		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		76		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	455	481	425	447
Average Queue (ft)	218	456	230	228
95th Queue (ft)	582	471	381	408
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	21	97		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				41
Queuing Penalty (veh)				0



Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

AM PEAK  
08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	372	263	21	530	527	96	214	236
Average Queue (ft)	337	231	2	477	478	79	174	186
95th Queue (ft)	353	248	11	599	609	138	256	263
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	83		88	90		31	88
Queuing Penalty (veh)	0	0		1062	1077		368	1061
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				89	84	0		
Queuing Penalty (veh)				0	194	4		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	556	27	42	275	2273	2409
Average Queue (ft)	204	523	2	11	185	2245	2372
95th Queue (ft)	299	542	14	32	342	2275	2427
Link Distance (ft)		504	342	342		2220	2220
Upstream Blk Time (%)		95				42	95
Queuing Penalty (veh)		0				693	1585
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	8	97			6	27	69
Queuing Penalty (veh)	49	586			85	80	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	10
Average Queue (ft)	0
95th Queue (ft)	5
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB
Directions Served	R	T	TR
Maximum Queue (ft)	202	399	396
Average Queue (ft)	179	223	342
95th Queue (ft)	198	460	416
Link Distance (ft)	176	342	342
Upstream Blk Time (%)	100	2	8
Queuing Penalty (veh)	0	37	174
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB
Directions Served	T	T
Maximum Queue (ft)	186	264
Average Queue (ft)	50	226
95th Queue (ft)	147	279
Link Distance (ft)	150	150
Upstream Blk Time (%)	1	24
Queuing Penalty (veh)	19	590
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	353
Average Queue (ft)	165
95th Queue (ft)	408
Link Distance (ft)	266
Upstream Blk Time (%)	5
Queuing Penalty (veh)	112
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement	SB
Directions Served	TR
Maximum Queue (ft)	184
Average Queue (ft)	73
95th Queue (ft)	144
Link Distance (ft)	314
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Network Summary

---

Network wide Queuing Penalty: 7775

---

PHF = 1.0

**Evac 1** – Evacuation (without project) in the AM Peak

### Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1829	1780	1769	1792	1766	1788
Vehs Exited	1731	1679	1706	1700	1710	1706
Starting Vehs	281	262	307	270	292	282
Ending Vehs	379	363	370	362	348	362
Denied Entry Before	111	105	100	89	97	101
Denied Entry After	1982	2023	2037	1992	2107	2029
Travel Distance (mi)	1600	1579	1608	1611	1609	1601
Travel Time (hr)	1351.0	1392.4	1406.7	1353.8	1407.4	1382.3
Total Delay (hr)	1295.1	1337.5	1350.7	1297.7	1351.6	1326.5
Total Stops	6213	6007	6125	6099	6108	6112
Fuel Used (gal)	348.4	356.7	360.7	349.6	362.3	355.5

### Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

### Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1829	1780	1769	1792	1766	1788
Vehs Exited	1731	1679	1706	1700	1710	1706
Starting Vehs	281	262	307	270	292	282
Ending Vehs	379	363	370	362	348	362
Denied Entry Before	111	105	100	89	97	101
Denied Entry After	1982	2023	2037	1992	2107	2029
Travel Distance (mi)	1600	1579	1608	1611	1609	1601
Travel Time (hr)	1351.0	1392.4	1406.7	1353.8	1407.4	1382.3
Total Delay (hr)	1295.1	1337.5	1350.7	1297.7	1351.6	1326.5
Total Stops	6213	6007	6125	6099	6108	6112
Fuel Used (gal)	348.4	356.7	360.7	349.6	362.3	355.5

### 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	5.4	3.8
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.7	4.1	2.9
Vehicles Entered	131	24	155
Vehicles Exited	131	24	155
Hourly Exit Rate	131	24	155
Input Volume	130	25	155
% of Volume	101	96	100
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	11.9	0.2	12.2
Total Del/Veh (s)	2.8	90.1	5.4	64.9
Stop Delay (hr)	0.0	10.8	0.2	11.0
Stop Del/Veh (s)	3.0	81.4	3.7	58.4
Vehicles Entered	44	467	154	665
Vehicles Exited	44	461	155	660
Hourly Exit Rate	44	461	155	660
Input Volume	42	478	155	675
% of Volume	105	96	100	98
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0



### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	340.2	0.0	340.2
Denied Del/Veh (s)	1091.5	0.0	687.3
Total Delay (hr)	17.0	6.6	23.7
Total Del/Veh (s)	157.5	35.4	80.1
Stop Delay (hr)	16.8	5.4	22.2
Stop Del/Veh (s)	155.7	28.7	75.2
Vehicles Entered	376	660	1036
Vehicles Exited	369	660	1029
Hourly Exit Rate	369	660	1029
Input Volume	1124	675	1799
% of Volume	33	98	57
Denied Entry Before	6	0	6
Denied Entry After	746	0	746

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	256.6	6.0	1.0	0.0	0.0	0.0	263.6
Denied Del/Veh (s)	1364.6	96.2	92.9	0.0	0.0	0.0	482.6
Total Delay (hr)	10.0	6.9	1.2	0.1	31.9	2.8	52.9
Total Del/Veh (s)	206.2	114.7	114.1	99.9	122.7	94.6	128.9
Stop Delay (hr)	10.3	6.8	1.1	0.1	31.9	2.9	53.0
Stop Del/Veh (s)	212.2	111.7	110.2	97.4	122.8	95.7	129.3
Vehicles Entered	166	216	36	3	918	107	1446
Vehicles Exited	165	212	36	3	896	103	1415
Hourly Exit Rate	165	212	36	3	896	103	1415
Input Volume	643	223	34	4	1626	173	2703
% of Volume	26	95	106	75	55	60	52
Denied Entry Before	11	1	0	0	0	0	12
Denied Entry After	511	8	1	0	0	0	520

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	422.6	0.0	0.0	0.0	0.0	422.6
Denied Del/Veh (s)	1507.7	0.0	0.0	0.0	0.0	659.7
Total Delay (hr)	24.0	0.0	0.0	13.3	141.8	179.2
Total Del/Veh (s)	315.9	29.4	3.3	380.3	396.7	377.1
Stop Delay (hr)	23.9	0.0	0.0	12.7	138.9	175.6
Stop Del/Veh (s)	313.5	27.4	3.4	363.3	388.7	369.4
Vehicles Entered	246	4	21	115	1157	1543
Vehicles Exited	248	3	22	112	1123	1508
Hourly Exit Rate	248	3	22	112	1123	1508
Input Volume	909	4	22	218	2274	3427
% of Volume	27	75	100	51	49	44
Denied Entry Before	83	0	0	0	0	83
Denied Entry After	763	0	0	0	0	763

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.5	4.5
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	12	12
Vehicles Exited	12	12
Hourly Exit Rate	12	12
Input Volume	26	26
% of Volume	46	46
Denied Entry Before	0	0
Denied Entry After	0	0

7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.8	1.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.2	0.2
Vehicles Entered	29	29
Vehicles Exited	29	29
Hourly Exit Rate	29	29
Input Volume	26	26
% of Volume	112	112
Denied Entry Before	0	0
Denied Entry After	0	0

14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.5	4.5
Total Del/Veh (s)	0.2	11.9	11.7
Stop Delay (hr)	0.0	1.4	1.4
Stop Del/Veh (s)	0.0	3.8	3.7
Vehicles Entered	25	1372	1397
Vehicles Exited	25	1372	1397
Hourly Exit Rate	25	1372	1397
Input Volume	26	3183	3209
% of Volume	96	43	44
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.5
Total Del/Veh (s)	0.6	19.0	15.1	16.8
Stop Delay (hr)	0.0	0.4	0.4	0.9
Stop Del/Veh (s)	0.0	2.3	2.3	2.3
Vehicles Entered	25	689	683	1397
Vehicles Exited	25	689	683	1397
Hourly Exit Rate	25	689	683	1397
Input Volume	26	1605	1578	3209
% of Volume	96	43	43	44
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	689	689
Vehicles Exited	689	689
Hourly Exit Rate	689	689
Input Volume	1605	1605
% of Volume	43	43
Denied Entry Before	0	0
Denied Entry After	0	0

### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0
Total Delay (hr)	0.0	1.0	1.1
Total Del/Veh (s)	7.8	5.3	5.3
Stop Delay (hr)	0.0	0.4	0.4
Stop Del/Veh (s)	1.8	2.1	2.1
Vehicles Entered	12	705	717
Vehicles Exited	12	704	716
Hourly Exit Rate	12	704	716
Input Volume	26	1605	1631
% of Volume	46	44	44
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

### Total Network Performance

Denied Delay (hr)	1027.1
Denied Del/Veh (s)	968.7
Total Delay (hr)	299.5
Total Del/Veh (s)	521.3
Stop Delay (hr)	277.9
Stop Del/Veh (s)	483.8
Vehicles Entered	1788
Vehicles Exited	1706
Hourly Exit Rate	1706
Input Volume	27792
% of Volume	6
Denied Entry Before	101
Denied Entry After	2029

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.1	0.1	11
	11	0.0	4.0	0.0	34
Stanley Boulevard	5	29.4	36.5	0.1	8
Quandt Road	4	99.9	148.7	0.4	11
Total		129.5	209.3	0.6	11

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.4	20.6	0.2	27
	19	0.9	16.0	0.1	33
Greenvalley Drive	2	5.4	12.3	0.1	21
Reliez Valle Road	3	31.8	55.7	0.3	16
	20	23.5	27.1	0.0	4
Springhill Road	4	122.7	132.1	0.1	3
Deer Hill Road	5	365.6	404.1	0.4	4
	11	19.1	27.7	0.1	10
Acalanes Avenue	14	11.9	15.9	0.0	9
	15	19.0	25.1	0.1	9
	16	6.6	16.0	0.1	24
	17	7.8	16.2	0.1	16
Mt. Diablo Boulevard	6	4.5	12.4	0.1	20
SR 24 EB Off Ramp	7	1.8	4.6	0.1	49
Total		625.8	785.8	1.7	8

# Queuing and Blocking Report

## Evacuation Scenario 1

08/23/2020

### Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	68	32	11
Average Queue (ft)	37	6	0
95th Queue (ft)	65	25	5
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

### Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	34	562	73	47	71
Average Queue (ft)	9	413	19	9	26
95th Queue (ft)	24	637	74	32	58
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		22	12		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		67		0	
Queuing Penalty (veh)		0		0	

### Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	454	486	339	344
Average Queue (ft)	237	456	177	175
95th Queue (ft)	599	474	273	281
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	24	94		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				26
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1

08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	368	254	15	521	527	96	212	215
Average Queue (ft)	336	227	1	470	472	76	161	179
95th Queue (ft)	353	257	8	597	611	140	252	267
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	99	70		83	87		22	82
Queuing Penalty (veh)	0	0		748	784		202	736
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				86	82	0		
Queuing Penalty (veh)				0	142	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	547	23	38	275	2273	2408
Average Queue (ft)	210	523	3	9	173	2241	2368
95th Queue (ft)	283	537	15	30	328	2310	2462
Link Distance (ft)		504	347	347		2220	2220
Upstream Blk Time (%)		95				42	95
Queuing Penalty (veh)		0				520	1178
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	8	97			4	26	66
Queuing Penalty (veh)	36	441			51	56	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)



## Queuing and Blocking Report

### Evacuation Scenario 1

08/23/2020

#### Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	5
Average Queue (ft)	0
95th Queue (ft)	3
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

#### Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

#### Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	B11	B11
----------	----	----	-----	-----

Directions Served	T	T	T	T
-------------------	---	---	---	---

Maximum Queue (ft)	167	258	387	387
--------------------	-----	-----	-----	-----

Average Queue (ft)	36	209	196	337
--------------------	----	-----	-----	-----

95th Queue (ft)	119	296	420	420
-----------------	-----	-----	-----	-----

Link Distance (ft)	147	147	347	347
--------------------	-----	-----	-----	-----

Upstream Blk Time (%)	1	20	1	6
-----------------------	---	----	---	---

Queuing Penalty (veh)	9	324	13	99
-----------------------	---	-----	----	----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 15: Pleasant Hill Road

Movement	SB	SB
----------	----	----

Directions Served	T	TR
-------------------	---	----

Maximum Queue (ft)	11	354
--------------------	----	-----

Average Queue (ft)	0	191
--------------------	---	-----

95th Queue (ft)	8	441
-----------------	---	-----

Link Distance (ft)	266	266
--------------------	-----	-----

Upstream Blk Time (%)		6
-----------------------	--	---

Queuing Penalty (veh)		94
-----------------------	--	----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

## Queuing and Blocking Report Evacuation Scenario 1

08/23/2020

### Intersection: 16: Pleasant Hill Road

#### Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

### Intersection: 17: Pleasant Hill Road

#### Movement

SB

SB

Directions Served

T

TR

Maximum Queue (ft)

14

165

Average Queue (ft)

0

75

95th Queue (ft)

10

147

Link Distance (ft)

314

314

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

### Network Summary

Network wide Queuing Penalty: 5435

PHF = 1.0

**Evac 1 + Project** – Evacuation plus project, with trap lane, in the AM  
Peak

## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	2313	2278	2198	2250	2209	2249
Vehs Exited	2165	2144	2089	2068	2058	2105
Starting Vehs	258	231	256	249	270	256
Ending Vehs	406	365	365	431	421	397
Denied Entry Before	144	167	171	169	170	165
Denied Entry After	2127	2179	2246	2233	2121	2181
Travel Distance (mi)	1976	1959	1927	1894	1879	1927
Travel Time (hr)	1489.0	1424.4	1515.3	1507.4	1458.8	1479.0
Total Delay (hr)	1419.8	1355.7	1448.0	1441.1	1392.7	1411.4
Total Stops	9117	8435	8871	8651	8322	8680
Fuel Used (gal)	391.0	376.5	395.1	393.7	380.7	387.4

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	2313	2278	2198	2250	2209	2249
Vehs Exited	2165	2144	2089	2068	2058	2105
Starting Vehs	258	231	256	249	270	256
Ending Vehs	406	365	365	431	421	397
Denied Entry Before	144	167	171	169	170	165
Denied Entry After	2127	2179	2246	2233	2121	2181
Travel Distance (mi)	1976	1959	1927	1894	1879	1927
Travel Time (hr)	1489.0	1424.4	1515.3	1507.4	1458.8	1479.0
Total Delay (hr)	1419.8	1355.7	1448.0	1441.1	1392.7	1411.4
Total Stops	9117	8435	8871	8651	8322	8680
Fuel Used (gal)	391.0	376.5	395.1	393.7	380.7	387.4

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.1	0.1
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	5.8	3.9
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.8	4.2	3.0
Vehicles Entered	133	23	156
Vehicles Exited	133	23	156
Hourly Exit Rate	133	23	156
Input Volume	130	25	155
% of Volume	102	92	101
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	13.6	0.2	13.9
Total Del/Veh (s)	2.7	101.7	5.2	73.8
Stop Delay (hr)	0.0	12.5	0.2	12.7
Stop Del/Veh (s)	3.0	93.2	3.6	67.3
Vehicles Entered	39	469	156	664
Vehicles Exited	38	463	156	657
Hourly Exit Rate	38	463	156	657
Input Volume	42	478	155	675
% of Volume	90	97	101	97
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	183.4	0.0	183.4
Denied Del/Veh (s)	578.6	0.0	367.2
Total Delay (hr)	14.4	4.6	19.0
Total Del/Veh (s)	72.8	24.8	49.4
Stop Delay (hr)	12.4	3.6	15.9
Stop Del/Veh (s)	62.7	19.0	41.5
Vehicles Entered	698	657	1355
Vehicles Exited	692	658	1350
Hourly Exit Rate	692	658	1350
Input Volume	1124	675	1799
% of Volume	62	97	75
Denied Entry Before	8	0	8
Denied Entry After	443	0	443

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	277.0	0.8	0.1	0.0	0.0	0.0	278.0
Denied Del/Veh (s)	1445.2	13.3	15.6	0.0	0.0	0.0	434.5
Total Delay (hr)	9.2	5.0	0.8	0.1	21.5	1.9	38.4
Total Del/Veh (s)	221.2	78.3	84.8	80.9	62.7	52.3	77.8
Stop Delay (hr)	9.4	4.7	0.8	0.1	19.1	1.8	35.9
Stop Del/Veh (s)	226.4	74.7	80.3	80.3	55.8	49.2	72.6
Vehicles Entered	141	226	34	4	1220	129	1754
Vehicles Exited	141	225	33	4	1196	127	1726
Hourly Exit Rate	141	225	33	4	1196	127	1726
Input Volume	643	223	34	4	1626	173	2703
% of Volume	22	101	97	100	74	73	64
Denied Entry Before	40	0	0	0	0	0	40
Denied Entry After	549	0	0	0	0	0	549

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	429.5	0.0	0.0	0.0	0.0	429.5
Denied Del/Veh (s)	1546.1	0.0	0.0	0.0	0.0	619.4
Total Delay (hr)	22.1	0.0	0.0	3.5	24.5	50.2
Total Del/Veh (s)	326.7	19.3	3.6	95.9	64.4	101.8
Stop Delay (hr)	21.8	0.0	0.0	3.3	21.3	46.4
Stop Del/Veh (s)	323.3	17.4	3.8	89.6	55.8	94.2
Vehicles Entered	218	4	22	129	1341	1714
Vehicles Exited	218	4	22	131	1342	1717
Hourly Exit Rate	218	4	22	131	1342	1717
Input Volume	909	4	22	218	2274	3427
% of Volume	24	100	100	60	59	50
Denied Entry Before	82	0	0	0	0	82
Denied Entry After	782	0	0	0	0	782

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	5.8	5.8
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	7	7
Vehicles Exited	7	7
Hourly Exit Rate	7	7
Input Volume	26	26
% of Volume	27	27
Denied Entry Before	0	0
Denied Entry After	0	0



7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.9	1.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.3	0.3
Vehicles Entered	31	31
Vehicles Exited	31	31
Hourly Exit Rate	31	31
Input Volume	26	26
% of Volume	119	119
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	205.8	0.0	0.0	205.8
Denied Del/Veh (s)	1266.7	0.0	0.0	341.3
Total Delay (hr)	7.0	0.0	14.4	21.3
Total Del/Veh (s)	115.4	0.0	32.9	42.3
Stop Delay (hr)	7.4	0.0	11.8	19.2
Stop Del/Veh (s)	123.2	0.0	27.0	38.1
Vehicles Entered	211	26	1560	1797
Vehicles Exited	210	26	1556	1792
Hourly Exit Rate	210	26	1556	1792
Input Volume	551	26	3183	3760
% of Volume	38	100	49	48
Denied Entry Before	31	0	0	31
Denied Entry After	374	0	0	374

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	8.6	8.6
Total Del/Veh (s)	0.2	17.6	17.3
Stop Delay (hr)	0.0	8.4	8.4
Stop Del/Veh (s)	0.0	17.2	16.9
Vehicles Entered	26	1766	1792
Vehicles Exited	26	1758	1784
Hourly Exit Rate	26	1758	1784
Input Volume	26	3734	3760
% of Volume	100	47	47
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.7	1.6	12.3
Total Del/Veh (s)	0.6	42.8	6.6	24.6
Stop Delay (hr)	0.0	12.0	0.2	12.2
Stop Del/Veh (s)	0.0	48.3	0.8	24.5
Vehicles Entered	26	889	869	1784
Vehicles Exited	26	882	870	1778
Hourly Exit Rate	26	882	870	1778
Input Volume	26	1880	1854	3760
% of Volume	100	47	47	47
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	16.6	16.6
Total Del/Veh (s)	66.3	66.3
Stop Delay (hr)	18.9	18.9
Stop Del/Veh (s)	75.5	75.5
Vehicles Entered	882	882
Vehicles Exited	882	882
Hourly Exit Rate	882	882
Input Volume	1880	1880
% of Volume	47	47
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.2	14.9	15.2
Denied Del/Veh (s)	106.7	59.3	59.7
Total Delay (hr)	0.1	15.0	15.1
Total Del/Veh (s)	59.2	60.5	60.4
Stop Delay (hr)	0.1	17.5	17.6
Stop Del/Veh (s)	63.0	70.6	70.5
Vehicles Entered	7	876	883
Vehicles Exited	7	875	882
Hourly Exit Rate	7	875	882
Input Volume	26	1880	1906
% of Volume	27	47	46
Denied Entry Before	0	2	2
Denied Entry After	1	30	31

---

Total Network Performance

---

Denied Delay (hr)	1113.6
Denied Del/Veh (s)	905.0
Total Delay (hr)	297.8
Total Del/Veh (s)	428.5
Stop Delay (hr)	274.0
Stop Del/Veh (s)	394.3
Vehicles Entered	2249
Vehicles Exited	2105
Hourly Exit Rate	2105
Input Volume	33042
% of Volume	6
Denied Entry Before	165
Denied Entry After	2181

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	33
Stanley Boulevard	5	19.3	27.1	0.1	10
	37	1.8	9.7	0.1	31
Quandt Road	4	80.9	116.6	0.4	11
Total		102.1	177.8	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	5.8	21.2	0.2	26
	19	1.0	16.4	0.1	33
Greenvalley Drive	2	5.2	12.0	0.1	21
Reliez Valle Road	3	20.2	43.9	0.3	21
	20	11.5	15.1	0.0	8
Springhill Road	4	62.7	72.2	0.1	5
	37	196.3	231.5	0.4	6
Deer Hill Road	5	64.4	72.3	0.1	4
Project Dwy	11	33.0	41.4	0.1	7
Acalanes Avenue	14	18.2	22.3	0.0	6
	15	42.8	48.9	0.1	5
	16	66.3	75.6	0.1	5
	17	59.2	189.6	0.1	4
Mt. Diablo Boulevard	6	5.8	13.5	0.1	18
SR 24 EB Off Ramp	7	1.9	4.7	0.1	48
Total		594.2	880.6	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	76	46	16
Average Queue (ft)	39	7	1
95th Queue (ft)	64	28	7
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	34	585	84	47	61
Average Queue (ft)	10	446	27	10	23
95th Queue (ft)	26	659	87	31	52
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		32	26		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		70		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	467	487	270	294
Average Queue (ft)	281	459	147	161
95th Queue (ft)	634	478	215	228
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	17	80		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				20
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project

08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	368	258	15	506	515	96	212	229
Average Queue (ft)	336	211	2	375	383	62	94	130
95th Queue (ft)	353	278	10	632	651	137	222	278
Link Distance (ft)	318	217		406	406		127	127
Upstream Blk Time (%)	100	32		37	51		8	41
Queuing Penalty (veh)	0	0		337	458		69	371
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				56	57	0		
Queuing Penalty (veh)				0	98	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB	SB	B37	B37
Directions Served	L	LT	T	R	L	T	T	T	T	T
Maximum Queue (ft)	225	550	22	43	275	442	447	441	1884	2009
Average Queue (ft)	108	522	2	8	174	366	392	410	1590	1711
95th Queue (ft)	271	536	13	29	316	523	454	467	2522	2656
Link Distance (ft)		504	342	342		351	351	351	1832	1832
Upstream Blk Time (%)		96				23	33	41	21	76
Queuing Penalty (veh)		0				193	278	337	260	943
Storage Bay Dist (ft)	185				175					
Storage Blk Time (%)		92			9	4		60		
Queuing Penalty (veh)		418			69	9		0		

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	5
Average Queue (ft)	0
95th Queue (ft)	4
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)



Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB	SB
Directions Served	R	T	T	TR
Maximum Queue (ft)	218	395	389	391
Average Queue (ft)	184	156	346	337
95th Queue (ft)	201	366	416	447
Link Distance (ft)	164	342	342	342
Upstream Blk Time (%)	100	2	15	10
Queuing Penalty (veh)	0	17	158	109
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB	SB
Directions Served	T	T	T
Maximum Queue (ft)	164	267	237
Average Queue (ft)	36	237	184
95th Queue (ft)	122	258	270
Link Distance (ft)	152	152	152
Upstream Blk Time (%)	1	97	11
Queuing Penalty (veh)	12	1208	140
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 15: Pleasant Hill Road

Movement	SB	SB	SB
Directions Served	T	T	R
Maximum Queue (ft)	56	370	283
Average Queue (ft)	11	341	106
95th Queue (ft)	47	363	244
Link Distance (ft)	262	262	262
Upstream Blk Time (%)		99	0
Queuing Penalty (veh)		1230	5
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 16: Pleasant Hill Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	542
Average Queue (ft)	512
95th Queue (ft)	534
Link Distance (ft)	302
Upstream Blk Time (%)	100
Queuing Penalty (veh)	939
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 17: Pleasant Hill Road

Movement	SB	SB
Directions Served	T	TR
Maximum Queue (ft)	188	535
Average Queue (ft)	15	505
95th Queue (ft)	123	526
Link Distance (ft)	314	314
Upstream Blk Time (%)	0	99
Queuing Penalty (veh)	0	622
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Network Summary

Network wide Queuing Penalty: 8283
------------------------------------

PHF = 1.0

**Evac 1 + Project Variant**– Evacuation plus project, no trap lane, in the  
AM Peak

## Summary of All Intervals

Run Number	1	2	3	4	5	Avg
Start Time	6:50	6:50	6:50	6:50	6:50	6:50
End Time	8:00	8:00	8:00	8:00	8:00	8:00
Total Time (min)	70	70	70	70	70	70
Time Recorded (min)	60	60	60	60	60	60
# of Intervals	2	2	2	2	2	2
# of Recorded Intervals	1	1	1	1	1	1
Vehs Entered	1718	1770	1818	1793	1804	1781
Vehs Exited	1667	1680	1753	1687	1699	1696
Starting Vehs	332	280	318	278	287	299
Ending Vehs	383	370	383	384	392	380
Denied Entry Before	188	149	166	161	143	161
Denied Entry After	2724	2604	2474	2543	2560	2582
Travel Distance (mi)	1573	1588	1620	1618	1608	1601
Travel Time (hr)	1799.8	1669.5	1677.1	1653.3	1680.2	1696.0
Total Delay (hr)	1745.0	1614.2	1620.7	1597.2	1624.2	1640.3
Total Stops	6005	6096	6145	6278	6138	6134
Fuel Used (gal)	447.6	420.7	423.1	417.9	422.6	426.4

## Interval #0 Information Seeding

Start Time	6:50
End Time	7:00
Total Time (min)	10
Volumes adjusted by Growth Factors.	
No data recorded this interval.	

## Interval #1 Information Recording

Start Time	7:00
End Time	8:00
Total Time (min)	60
Volumes adjusted by Growth Factors.	

Run Number	1	2	3	4	5	Avg
Vehs Entered	1718	1770	1818	1793	1804	1781
Vehs Exited	1667	1680	1753	1687	1699	1696
Starting Vehs	332	280	318	278	287	299
Ending Vehs	383	370	383	384	392	380
Denied Entry Before	188	149	166	161	143	161
Denied Entry After	2724	2604	2474	2543	2560	2582
Travel Distance (mi)	1573	1588	1620	1618	1608	1601
Travel Time (hr)	1799.8	1669.5	1677.1	1653.3	1680.2	1696.0
Total Delay (hr)	1745.0	1614.2	1620.7	1597.2	1624.2	1640.3
Total Stops	6005	6096	6145	6278	6138	6134
Fuel Used (gal)	447.6	420.7	423.1	417.9	422.6	426.4

## 1: Pleasant Hill Road & Rancho View Drive Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.2	0.1	0.2
Total Delay (hr)	0.1	0.0	0.2
Total Del/Veh (s)	3.5	6.8	4.0
Stop Delay (hr)	0.1	0.0	0.1
Stop Del/Veh (s)	2.7	5.1	3.1
Vehicles Entered	135	26	161
Vehicles Exited	135	26	161
Hourly Exit Rate	135	26	161
Input Volume	130	25	155
% of Volume	104	104	104
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

## 2: Pleasant Hill Road & Greenvaley Drive Performance by movement

Movement	EBR	WBL	SBT	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	10.7	0.2	11.0
Total Del/Veh (s)	3.2	82.0	5.0	58.4
Stop Delay (hr)	0.0	9.6	0.2	9.8
Stop Del/Veh (s)	3.4	73.3	3.4	52.0
Vehicles Entered	45	457	160	662
Vehicles Exited	45	454	159	658
Hourly Exit Rate	45	454	159	658
Input Volume	42	478	155	675
% of Volume	107	95	103	97
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

### 3: Pleasant Hill Road & Reliez Valle Road Performance by movement

Movement	EBR	SBT	All
Denied Delay (hr)	366.7	0.0	366.7
Denied Del/Veh (s)	1156.1	0.0	733.9
Total Delay (hr)	17.0	7.7	24.7
Total Del/Veh (s)	170.9	41.0	86.2
Stop Delay (hr)	17.1	6.4	23.4
Stop Del/Veh (s)	171.0	34.2	81.8
Vehicles Entered	348	657	1005
Vehicles Exited	340	655	995
Hourly Exit Rate	340	655	995
Input Volume	1124	675	1799
% of Volume	30	97	55
Denied Entry Before	12	0	12
Denied Entry After	794	0	794

### 4: Pleasant Hill Road & Springhill Road/Quandt Road Performance by movement

Movement	EBR	WBL	WBT	NBL	SBT	SBR	All
Denied Delay (hr)	232.9	5.0	0.9	0.0	0.0	0.0	238.9
Denied Del/Veh (s)	1302.1	78.2	89.6	0.0	0.0	0.0	450.7
Total Delay (hr)	9.8	6.7	1.2	0.1	32.7	3.0	53.4
Total Del/Veh (s)	181.3	106.8	120.8	81.7	129.3	109.9	131.2
Stop Delay (hr)	10.2	6.5	1.1	0.1	32.9	3.0	53.8
Stop Del/Veh (s)	187.4	103.4	116.2	79.8	130.5	111.8	132.2
Vehicles Entered	186	223	35	5	894	97	1440
Vehicles Exited	185	220	35	5	869	93	1407
Hourly Exit Rate	185	220	35	5	869	93	1407
Input Volume	643	223	34	4	1626	173	2703
% of Volume	29	99	103	125	53	54	52
Denied Entry Before	15	0	0	0	0	0	15
Denied Entry After	458	9	1	0	0	0	468

5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard Performance by movement

Movement	WBL	NBT	NBR	SBL	SBT	All
Denied Delay (hr)	392.5	0.0	0.0	0.0	0.0	392.5
Denied Del/Veh (s)	1474.8	0.0	0.0	0.0	0.0	625.7
Total Delay (hr)	24.1	0.0	0.0	13.2	142.1	179.4
Total Del/Veh (s)	329.5	21.8	2.9	374.4	394.4	377.1
Stop Delay (hr)	23.9	0.0	0.0	12.5	139.4	175.8
Stop Del/Veh (s)	327.1	19.9	3.0	354.8	386.9	369.6
Vehicles Entered	238	5	21	115	1159	1538
Vehicles Exited	235	5	21	113	1132	1506
Hourly Exit Rate	235	5	21	113	1132	1506
Input Volume	909	4	22	218	2274	3427
% of Volume	26	125	95	52	50	44
Denied Entry Before	69	0	0	0	0	69
Denied Entry After	720	0	0	0	0	720

6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp Performance by movement

Movement	SBR	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	4.9	4.9
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	8	8
Vehicles Exited	8	8
Hourly Exit Rate	8	8
Input Volume	26	26
% of Volume	31	31
Denied Entry Before	0	0
Denied Entry After	0	0



7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.1	0.1
Total Delay (hr)	0.0	0.0
Total Del/Veh (s)	1.7	1.7
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	23	23
Vehicles Exited	23	23
Hourly Exit Rate	23	23
Input Volume	26	26
% of Volume	88	88
Denied Entry Before	0	0
Denied Entry After	0	0

11: Pleasant Hill Road & Project Dwy Performance by movement

Movement	EBR	NBT	SBT	All
Denied Delay (hr)	333.1	0.0	0.0	333.1
Denied Del/Veh (s)	1956.2	0.0	0.0	598.1
Total Delay (hr)	8.0	0.0	8.0	16.1
Total Del/Veh (s)	1374.8	0.0	21.0	40.7
Stop Delay (hr)	8.1	0.0	4.5	12.5
Stop Del/Veh (s)	1380.2	0.0	11.7	31.7
Vehicles Entered	13	25	1367	1405
Vehicles Exited	13	25	1368	1406
Hourly Exit Rate	13	25	1368	1406
Input Volume	551	26	3183	3760
% of Volume	2	96	43	37
Denied Entry Before	65	0	0	65
Denied Entry After	600	0	0	600

#### 14: Pleasant Hill Road & Acalanes Avenue Performance by movement

Movement	NBT	SBT	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	4.7	4.7
Total Del/Veh (s)	0.2	12.3	12.1
Stop Delay (hr)	0.0	1.6	1.6
Stop Del/Veh (s)	0.0	4.0	4.0
Vehicles Entered	25	1381	1406
Vehicles Exited	25	1382	1407
Hourly Exit Rate	25	1382	1407
Input Volume	26	3734	3760
% of Volume	96	37	37
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

#### 15: Pleasant Hill Road Performance by movement

Movement	WBR	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0	0.0
Denied Del/Veh (s)	0.1	0.0	0.0	0.0
Total Delay (hr)	0.0	3.7	2.9	6.6
Total Del/Veh (s)	0.6	19.0	15.3	16.8
Stop Delay (hr)	0.0	0.4	0.4	0.8
Stop Del/Veh (s)	0.0	2.1	2.1	2.1
Vehicles Entered	25	694	688	1407
Vehicles Exited	25	697	686	1408
Hourly Exit Rate	25	697	686	1408
Input Volume	26	1880	1854	3760
% of Volume	96	37	37	37
Denied Entry Before	0	0	0	0
Denied Entry After	0	0	0	0

#### 16: Pleasant Hill Road Performance by movement

Movement	SBT	All
Denied Delay (hr)	0.0	0.0
Denied Del/Veh (s)	0.0	0.0
Total Delay (hr)	1.3	1.3
Total Del/Veh (s)	6.6	6.6
Stop Delay (hr)	0.0	0.0
Stop Del/Veh (s)	0.0	0.0
Vehicles Entered	697	697
Vehicles Exited	697	697
Hourly Exit Rate	697	697
Input Volume	1880	1880
% of Volume	37	37
Denied Entry Before	0	0
Denied Entry After	0	0

#### 17: Pleasant Hill Road Performance by movement

Movement	SBT	SBR	All
Denied Delay (hr)	0.0	0.0	0.0
Denied Del/Veh (s)	0.0	0.0	0.0
Total Delay (hr)	0.0	1.0	1.0
Total Del/Veh (s)	7.6	4.8	4.8
Stop Delay (hr)	0.0	0.3	0.3
Stop Del/Veh (s)	1.2	1.7	1.7
Vehicles Entered	8	716	724
Vehicles Exited	8	714	722
Hourly Exit Rate	8	714	722
Input Volume	26	1880	1906
% of Volume	31	38	38
Denied Entry Before	0	0	0
Denied Entry After	0	0	0

---

Total Network Performance

---

Denied Delay (hr)	1331.4
Denied Del/Veh (s)	1098.6
Total Delay (hr)	308.8
Total Del/Veh (s)	535.6
Stop Delay (hr)	287.7
Stop Del/Veh (s)	499.0
Vehicles Entered	1781
Vehicles Exited	1696
Hourly Exit Rate	1696
Input Volume	30546
% of Volume	6
Denied Entry Before	161
Denied Entry After	2582

Arterial Level of Service: NB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Acalanes Avenue	14	0.2	20.2	0.1	11
Project Dwy	11	0.0	4.1	0.0	34
Stanley Boulevard	5	21.8	29.1	0.1	10
Quandt Road	4	81.7	122.2	0.4	13
Total		103.8	175.6	0.6	13

Arterial Level of Service: SB Pleasant Hill Road

Cross Street	Node	Delay (s/veh)	Travel time (s)	Dist (mi)	Arterial Speed
Rancho View Drive	1	6.8	22.1	0.2	25
	19	1.2	15.8	0.1	34
Greenvalley Drive	2	5.0	11.9	0.1	22
Reliez Valle Road	3	37.7	61.6	0.3	15
	20	24.4	28.0	0.0	4
Springhill Road	4	129.3	138.7	0.1	3
Deer Hill Road	5	358.8	396.8	0.4	4
Project Dwy	11	20.5	29.0	0.1	10
Acalanes Avenue	14	12.4	16.4	0.0	8
	15	19.0	25.1	0.1	9
	16	6.6	16.0	0.1	24
	17	7.6	17.2	0.1	15
Mt. Diablo Boulevard	6	4.9	13.5	0.1	18
SR 24 EB Off Ramp	7	1.7	4.5	0.1	50
Total		635.7	796.7	1.7	8

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 1: Pleasant Hill Road & Rancho View Drive

Movement	EB	SB	SB
Directions Served	LTR	T	TR
Maximum Queue (ft)	77	45	16
Average Queue (ft)	38	8	1
95th Queue (ft)	63	30	7
Link Distance (ft)	306	773	773
Upstream Blk Time (%)			
Queuing Penalty (veh)			
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 2: Pleasant Hill Road & Greenvalley Drive

Movement	EB	WB	B60	SB	SB
Directions Served	LTR	LT	T	T	TR
Maximum Queue (ft)	44	567	56	50	64
Average Queue (ft)	11	385	10	9	25
95th Queue (ft)	29	611	51	31	57
Link Distance (ft)	333	494	53	288	288
Upstream Blk Time (%)		12	5		
Queuing Penalty (veh)		0	0		
Storage Bay Dist (ft)					
Storage Blk Time (%)		63		0	
Queuing Penalty (veh)		0		0	

Intersection: 3: Pleasant Hill Road & Reliez Valle Road

Movement	EB	EB	SB	SB
Directions Served	L	R	T	T
Maximum Queue (ft)	459	488	358	394
Average Queue (ft)	253	456	187	189
95th Queue (ft)	615	491	312	337
Link Distance (ft)	438	438	1259	1259
Upstream Blk Time (%)	27	94		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				28
Queuing Penalty (veh)				0

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 4: Pleasant Hill Road & Springhill Road/Quandt Road

Movement	EB	WB	NB	SB	SB	SB	B20	B20
Directions Served	LTR	LTR	L	T	T	R	T	T
Maximum Queue (ft)	369	258	16	526	525	96	207	220
Average Queue (ft)	338	223	2	476	476	76	164	183
95th Queue (ft)	355	265	9	581	604	140	245	262
Link Distance (ft)	318	213		414	414		127	127
Upstream Blk Time (%)	100	64		86	90		24	85
Queuing Penalty (veh)	0	0		775	809		213	762
Storage Bay Dist (ft)			200			71		
Storage Blk Time (%)				89	84	0		
Queuing Penalty (veh)				0	145	2		

Intersection: 5: Pleasant Hill Road & Deer Hill Road/Stanley Boulevard

Movement	WB	WB	NB	NB	SB	SB	SB
Directions Served	L	LT	T	R	L	T	T
Maximum Queue (ft)	225	547	28	29	275	2274	2410
Average Queue (ft)	212	521	3	8	192	2241	2371
95th Queue (ft)	276	536	15	28	344	2292	2451
Link Distance (ft)		504	342	342		2220	2220
Upstream Blk Time (%)		95				41	95
Queuing Penalty (veh)		0				506	1182
Storage Bay Dist (ft)	185				175		
Storage Blk Time (%)	11	97			4	30	68
Queuing Penalty (veh)	52	440			47	64	0

Intersection: 6: Pleasant Hill Road & Mt. Diablo Boulevard/SR 24 EB On Ramp

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 7: Pleasant Hill Road & SR 24 EB Off Ramp/Old Tunnel Road

Movement	SB
Directions Served	T
Maximum Queue (ft)	2
Average Queue (ft)	0
95th Queue (ft)	2
Link Distance (ft)	
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

Intersection: 8: Brown Avenue/Miller Drive & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)

Intersection: 9: First Street/Sierra Vista Way & Deer Hill Road

Movement
Directions Served
Maximum Queue (ft)
Average Queue (ft)
95th Queue (ft)
Link Distance (ft)
Upstream Blk Time (%)
Queuing Penalty (veh)
Storage Bay Dist (ft)
Storage Blk Time (%)
Queuing Penalty (veh)



Queuing and Blocking Report  
Evacuation Scenario 1 plus Project Variant

08/23/2020

Intersection: 10: SR 24 WB Ramps/Laurel Drive & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 11: Pleasant Hill Road & Project Dwy

Movement	EB	SB	SB
----------	----	----	----

Directions Served	R	T	TR
-------------------	---	---	----

Maximum Queue (ft)	204	392	380
--------------------	-----	-----	-----

Average Queue (ft)	180	212	338
--------------------	-----	-----	-----

95th Queue (ft)	199	435	410
-----------------	-----	-----	-----

Link Distance (ft)	176	342	342
--------------------	-----	-----	-----

Upstream Blk Time (%)	100	1	7
-----------------------	-----	---	---

Queuing Penalty (veh)	0	23	114
-----------------------	---	----	-----

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 12: Project Dwy NE & Deer Hill Road

Movement

Directions Served

Maximum Queue (ft)

Average Queue (ft)

95th Queue (ft)

Link Distance (ft)

Upstream Blk Time (%)

Queuing Penalty (veh)

Storage Bay Dist (ft)

Storage Blk Time (%)

Queuing Penalty (veh)

Intersection: 13: Project Dwy SW & Deer Hill Road

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

Intersection: 14: Pleasant Hill Road & Acalanes Avenue

Movement	SB	SB
Directions Served	T	T
Maximum Queue (ft)	180	257
Average Queue (ft)	48	214
95th Queue (ft)	146	294
Link Distance (ft)	150	150
Upstream Blk Time (%)	1	22
Queuing Penalty (veh)	15	409
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Intersection: 15: Pleasant Hill Road

Movement	SB
Directions Served	TR
Maximum Queue (ft)	351
Average Queue (ft)	179
95th Queue (ft)	424
Link Distance (ft)	266
Upstream Blk Time (%)	5
Queuing Penalty (veh)	89
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Intersection: 16: Pleasant Hill Road

---

Movement

Directions Served  
Maximum Queue (ft)  
Average Queue (ft)  
95th Queue (ft)  
Link Distance (ft)  
Upstream Blk Time (%)  
Queuing Penalty (veh)  
Storage Bay Dist (ft)  
Storage Blk Time (%)  
Queuing Penalty (veh)

---

Intersection: 17: Pleasant Hill Road

---

Movement	SB
Directions Served	TR
Maximum Queue (ft)	161
Average Queue (ft)	67
95th Queue (ft)	128
Link Distance (ft)	314
Upstream Blk Time (%)	
Queuing Penalty (veh)	
Storage Bay Dist (ft)	
Storage Blk Time (%)	
Queuing Penalty (veh)	

---

Network Summary

---

Network wide Queuing Penalty: 5648

---



---

**Acalanes High School**  
***"Home of the Dons"***

1200 Pleasant Hill Rd. Lafayette CA 94349 | (925) 280-3970 | FAX: (925) 280-3971

---

September 27, 2017

To Whom it May Concern:

I received a request to voice my concern regarding the increased traffic on Reliez Valley Road during morning commute time. It is assumed this is due to an increase in the use of driving traffic applications such as "Waze" rerouting "fastest routes" for commuters. While it may very well be that fastest routes are side residential roads, it has been reported to me by multiple students and parents that commute traffic specifically on Reliez Valley Road has significantly impacted traffic safety and the time and stress of students getting to school.

As the principal of Acalanes High School, it is important to me that students have access to a safe route to school. While my background and training is in educational leadership, I do think it is imperative that appropriate city and county agencies evaluate and consider solutions that keep roads designed as local community streets free from heavy outside use and therefore helping our students get to school in a safe and calm manner. We would hate to wait for a tragic accident to be the impetus for the needed regulation and change.

I would also like to highlight that the Acalanes Union High School District as a whole recently changed the school-day schedule to include three "late start days" for students, wherein the first period of instruction is 8:30AM versus, what was for many years standard, 8:00AM. This was done in an effort to allow students an opportunity for more sleep and decreasing student stress as indicated as a high priority for all stakeholders. The current traffic situation on Reliez Valley Road hinders the positive movement made by the school district for those students that have reported having to wake up significantly earlier than previous years to leave before traffic builds.

Please reach out if you have any questions or concerns. I appreciate your consideration of this issue.

Best,

Travis Bell  
Principal  
Acalanes High School

# calanes Union High School District

1212 Pleasant Hill Road, Lafayette, CA 94549

[www.acalanes.k12.ca.us](http://www.acalanes.k12.ca.us)

925-280-3900 ♦ Fax 925-280-3903

## GOVERNING BOARD

Nancy Kendzierski  
*President*

Robert Hockett  
*Clerk*

Craig Cheslog  
*Member*

Kathleen R. Coppersmith  
*Member*

Susan Epstein  
*Member*

Komal Sethi  
*Student Board Member*

## DISTRICT ADMINISTRATION

John T. Nickerson, Ed.D.  
*Superintendent*

Aida Glimme  
*Associate Superintendent,  
Educational Services*

Amy McNamara  
*Associate Superintendent,  
Administrative Services*

Julie Bautista  
*Chief Business Official*

## SCHOOLS

Acalanes Adult Education  
*Walnut Creek*

Acalanes Center for  
Independent Study  
*Walnut Creek*

Acalanes High School  
*Lafayette*

Campolindo High School  
*Moraga*

Las Lomas High School  
*Walnut Creek*

Miramonte High School  
*Orinda*

To whom it may concern:

A group of Acalanes High School parents and students have made me aware increasing congestion on Reliez Valley Road and in the residential neighborhoods surrounding the road in the cities of Pleasant Hill and Lafayette and unincorporated Contra Costa County. The Reliez Valley Road congestion during commute hours has been growing significantly over time as the route seems to be identified in mapping apps as “fastest” and as an alternative for commute traffic that would normally utilize Highways 68/24 or Pleasant Hill Road, thoroughfares that were engineered and designed for commuter volume of traffic.

Reliez Valley Road was not designed for this level of traffic. While I have not studied the flow, nor do I have any training to analyze traffic patterns, I do have significant concern regarding the safety of our students coming to our schools during commute hours from the neighborhoods on and surrounding Reliez Valley Road.

This seems to be a problem that should raise great alarm and action for the agencies that have jurisdiction and can provide regulatory measures to control traffic and address safety issues.

Sincerely,



John Nickerson

Superintendent

Acalanes Union High School District



February 1, 2018

To Whom It May Concern:

Residents of the Reliez Valley Road neighborhoods in Lafayette have voiced concerns regarding travelling on Reliez Valley Road, particularly during the A.M. commute.

Based on photographs provided by the neighbors and the personal experiences of Fire District staff moving through the area, there has obviously been a marked increase in congestion through the corridor. Although a significant number of people moving through the area are going to the local schools, the congestion cannot be attributed to school traffic alone. A significant number of vehicles are using Taylor Road, Reliez Valley Road, and Pleasant Hill Road as bypasses to Interstate 680. It is not uncommon for morning traffic on Taylor Road to back up onto Geary Road.

The traffic situation through this area definitely has an impact on fire responses. Engine 2, responding from Geary Road to calls along the Taylor Road corridor, has significantly increased response times during that time of the morning. If there were to be a fire call, or a severe medical call, on Reliez Valley Road, we might experience significant difficulty in getting to the scene. This is the case even if traveling in the non-commute direction because of people passing illegally and just general congestion. Making a left turn across the traffic direction would be especially difficult.

While the traffic situation is a definite concern during the school year, there is not much improvement when school is on break. We bring this to your attention because there is a high level of wildland fire danger in certain areas of Reliez Valley Road. During a high wind event, the combination of high traffic congestion from commuters and potential evacuee traffic could make response into the area very difficult for fire resources.

The Contra Costa County Fire Protection District is supportive of all solutions that would improve the quality of life for the residents along the Reliez Valley Road corridor. Any solutions that help the residents would also improve our ability to respond in the case of an emergency. We do not feel that doing nothing is a viable option.

The Fire District would welcome the opportunity to meet with stakeholders in order to evaluate possible solutions. Please let us know if you identify anything specific that we can do to help.

Sincerely,

  
Jeff Carman  
Fire Chief

**AGENDA ITEM 7**

April 8, 2021

Mr. Tim Haile, Executive Director  
Contra Costa Transportation Authority  
2999 Oak Road, Suite 100  
Walnut Creek, CA 94597

RE: March 2021 WCCTAC Board Meeting Summary

Dear Tim:

The WCCTAC Board, at its meeting on March 26, 2021, took the following actions that may be of interest to CCTA:

1. *Approved* circulation of staff letter to the LPMC regarding a proposed amendment to the Lamorinda Action Plan Amendment.
2. *Approved* the release of the 2019 STMP Update Cycle 1 Call for Projects. \$3.75 million is available for the 20 projects on the 2019 STMP project list.

Please let me know if you have any follow-up questions.

Sincerely,



John Nemeth  
Executive Director

cc: Tarien Grover, CCTA; John Cunningham, TRANSPAC; Jamar Stamps, TRANSPLAN; Lisa Bobadilla, SWAT; Matt Todd, CCTA





# ***SWAT***

---

Danville • Lafayette • Moraga • Orinda • San Ramon & the County of Contra Costa

April 7, 2021

Mr. Tim Haile, Executive Director  
Contra Costa Transportation Authority  
2999 Oak Road, Suite 100  
Walnut Creek, CA 94597

**RE: SWAT Meeting Summary Report for April 2021**

Dear Mr. Haile:

The Southwest Area Transportation Committee ("SWAT") met Monday, April 5, 2021. The following is a summary of the meeting and action items:

1. Approved the Request for Proposal(s) for the SWAT Website Design, Development and Maintenance Services.

Please contact me at (925) 973-2651 or email at [lbobadilla@sanramon.ca.gov](mailto:lbobadilla@sanramon.ca.gov), if you need additional information.

All the best,

*Lisa Bobadilla*

Lisa Bobadilla  
SWAT Administrator

Cc: SWAT; SWAT TAC; Hisham Noeimi, CCTA; Matt Kelly, CCTA, John Hoang, CCTA; Matt Todd, TRANSPAC; John Nemeth, WCCTAC; Robert Sarmiento, TRANSPLAN

**TRANSPAC**  
**Transportation Partnership and Cooperation**  
Clayton, Concord, Martinez, Pleasant Hill, Walnut Creek and Contra Costa County  
1211 Newell Avenue, Suite 200  
Walnut Creek, CA 94596  
(925) 937-0980

April 8, 2021

Timothy Haile  
Executive Director  
Contra Costa Transportation Authority  
2999 Oak Road, Suite 100  
Walnut Creek, CA 94597

**RE: Status Letter for TRANSPAC Meeting – April 8, 2021**


Dear Mr. Haile:

The TRANSPAC Committee met on April 8, 2021. The following is a summary of the meeting and action items:

1. Appointed Abhishek Parikh, Andy Smith, and Mario Moreno to serve as primary members and Lynne Filson as the alternate on behalf of TRANSPAC to the CCTA Technical Coordinating Committee (TCC) for the term April 1, 2021 – March 31, 2023.
2. Discussed the TRANSPAC Work Plan and Budget Process for Fiscal Year 2021/2022.
3. Received information on the Accessible Transportation Strategic Plan (ATSP).

Please contact me at (925) 937-0980, or email at [matt@graybowenscott.com](mailto:matt@graybowenscott.com) if you need additional information.

Sincerely,



**Matthew Todd**  
Managing Director

cc: TRANSPAC Representatives; TRANSPAC TAC and staff  
Matt Kelly and Hisham Noemi, CCTA Staff  
John Cunningham, TRANSPLAN; Aaron Meadows, Chair, TRANSPLAN  
Lisa Bobadilla, SWAT; Theresa Gerringer, Chair, SWAT  
John Nemeth, WCCTAC; Chris L Kelley, Chair, WCCTAC  
Tarienne Grover, CCTA Staff  
June Catalano, Diane Bentley (City of Pleasant Hill)